
***Changes to legislation:** There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details) [View outstanding changes](#)*

Commission Regulation (EU) No 1008/2010 of 9 November 2010 concerning type-approval requirements for windscreen wiper and washer systems of certain motor vehicles and implementing Regulation (EC) No 661/2009 of the European Parliament and of the Council concerning type-approval requirements for the general safety of motor vehicles, their trailers and systems, components and separate technical units intended therefor (Text with EEA relevance)

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details) View outstanding changes

ANNEX I

Administrative documents for EC type-approval of motor vehicles with regard to their windscreen wiper and washer systems

PART 1

Information document

MODEL

Information document No ... relating to the EC type-approval of a motor vehicle with regard to its windscreen wiper and washer systems.

The following information shall be supplied in triplicate and include a list of contents. Any drawings shall be supplied in appropriate scale and in sufficient detail on size A4 or on a folder of A4 format. Photographs, if any, shall show sufficient detail.

If the systems, components or separate technical units referred to in this information document have electronic controls, information concerning their performance shall be supplied.

0. GENERAL

0.1. Make (trade name of manufacturer): ...

0.2. Type: ...

0.2.1. Commercial name(s) (if available): ...

0.3. Means of identification of type, if marked on the vehicle⁽¹⁾: ...

0.3.1. Location of that marking: ...

0.4. Category of vehicle⁽²⁾: ...

0.5. Name and address of manufacturer: ...

0.8. Name(s) and address(es) of assembly plant(s): ...

0.9. Name and address of the manufacturer's representative (if any): ...

1. GENERAL CONSTRUCTION CHARACTERISTICS OF THE VEHICLE

1.1. Photographs and/or drawings of a representative vehicle: ...

3. POWER PLANT⁽³⁾

3.2. Internal combustion engine

3.2.1.8. Maximum net power⁽⁴⁾: ... kW at ... min⁻¹ (manufacturer's declared value)

3.2.5. Electrical system

3.2.5.1. Rated voltage: ... V, positive/negative ground⁽⁵⁾

3.2.5.2. Generator

3.2.5.2.1. Type: ...

3.2.5.2.2. Nominal output: ... VA

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details) View outstanding changes

- 3.3. Electric motor
 - 3.3.1.1. Maximum hourly output: ... kW
 - 3.3.1.2. Operating voltage: ... V
 - 3.3.2. Battery
 - 3.3.2.3. Capacity: ... Ah (Amp-hours)
- 3.4. Engine or motor combination
 - 3.4.1. Hybrid electric vehicle: yes/no⁽⁵⁾
 - 3.4.2. Category of hybrid electric vehicle: off-vehicle charging/not off-vehicle charging:⁽⁵⁾
 - 3.4.4. Description of the energy storage device: (battery, capacitor, flywheel/generator)
 - 3.4.4.5. Energy: ...
(for battery: voltage and capacity Ah in 2 h, for capacitor: J, ...)
 - 3.4.4.6. Charger: on board/external/without⁽⁵⁾
- 4. TRANSMISSION⁽⁶⁾
 - 4.7. Maximum vehicle design speed (in km/h)⁽⁷⁾: ...
- 9. BODYWORK
 - 9.2. Materials used and methods of construction: ...
 - 9.4. Field of vision
 - 9.4.1. Particulars of the primary reference marks in sufficient detail to enable them to be readily identified and the position of each in relation to the others and to the R-point to be verified: ...
 - 9.5. Windscreen and other windows
 - 9.5.1. Windscreen
 - 9.5.1.1. Materials used: ...
 - 9.5.1.2. Method of mounting: ...
 - 9.5.1.3. Angle of inclination: ...
 - 9.5.1.4. Type-approval number(s): ...
 - 9.5.1.5. Windscreen accessories and the position in which they are fitted together with a brief description of any electrical/electronic components involved: ...
 - 9.6. Windscreen wiper system
 - 9.6.1. Detailed technical description (including photographs or drawings): ...
 - 9.7. Windscreen washer system
 - 9.7.1. Detailed technical description (including photographs or drawings) or, if approved as separate technical unit, type-approval number: ...

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details) View outstanding changes

- 9.8. Defrosting and demisting
 - 9.8.2. Maximum electrical consumption: ...kW
 - 9.10. Interior arrangement
 - 9.10.3. Seats
 - 9.10.3.5. Coordinates or drawing of the R-point
 - 9.10.3.5.1 Driver's seat: ...
 - 9.10.3.6. Design torso angle
 - 9.10.3.6.1 Driver's seat: ...
- Explanatory notes*
.....

PART 2

EC type-approval certificate

MODELFormat: A4 (210 × 297 mm)EC TYPE-APPROVAL CERTIFICATE

Stamp of type-approval authority

Communication concerning:

<ul style="list-style-type: none"> — EC type-approval^a — extension of EC type-approval^a — refusal of EC type-approval^a — withdrawal of EC type-approval^a 	of a type of vehicle with regard to its windscreen wiper and washer systems
--	--

with regard to Regulation (EU) No 1008/2010, as last amended by Regulation (EU) No .../
...^a

EC type-approval number: ...

Reason for extension: ...

^a Delete where not applicable.

SECTION 1.

- I Make (trade name of manufacturer): ...
- 0.2. Type: ...
 - 0.2.1. Commercial name(s) (if available): ...
- 0.3. Means of identification of type, if marked on the vehicle⁽⁸⁾: ...
 - 0.3.1. Location of that marking: ...
- 0.4. Category of vehicle⁽⁹⁾: ...
- 0.5. Name and address of manufacturer: ...

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details) View outstanding changes

0.8. Name(s) and address(es) of assembly plant(s): ...

0.9. Name and address of the manufacturer's representative (if any): ...

SECTION.

II

Additional information: see Addendum.

2. Technical service responsible for carrying out the tests: ...

3. Date of test report: ...

4. Number of test report: ...

5. Remarks (if any): see Addendum.

6. Place: ...

7. Date: ...

8. Signature: ...

Attachments : Information package

Test report

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details) View outstanding changes

Addendum

to EC type-approval certificate No ...

1. Additional information:
 - 1.1. Brief description of the vehicle type as regards its structure, dimensions, lines and constituent materials: ...
 - 1.2. Description of the method of operation of the wiper and washing systems: ...
 - 1.3. Detailed description of the wiper system (i.e. number of blades, blade lengths, wiper arm dimensions, etc.): ...
 - 1.4. Detailed description of the washer system (i.e. number of nozzles, number of outlet ports per nozzle, washer pump, fluid storage container, washer line hoses and their mounting to pump and nozzles, etc.) ...
 - 1.5. Fluid storage capacity (litre): ...
 - 1.6. Maximum vehicle design speed (km/h): ...
2. Hand of drive: left/right⁽¹⁰⁾
3. Left hand drive and mirror-opposite right hand drive systems: yes/no⁽¹⁰⁾
4. Aerodynamic spoiler fitted onto the wiper arm/wiper blade⁽¹⁰⁾ at driver side/centre/passenger side/ ...⁽¹⁰⁾
5. Remarks: ...

ANNEX II

Administrative documents for EC type-approval of windscreen washer systems as separate technical units

PART 1

Information document

MODEL

Information document No ... relating to the EC type-approval as a separate technical unit of windscreen washer systems.

The following information shall be supplied in triplicate and include a list of contents. Any drawings shall be supplied in appropriate scale and in sufficient detail on size A4 or on a folder of A4 format. Photographs, if any, shall show sufficient detail.

If the systems, components or separate technical units referred to in this information document have electronic controls, information concerning their performance shall be supplied.

0. GENERAL

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details) View outstanding changes

- 0.1. Make (trade name of manufacturer): ...
- 0.2. Type: ...
- 0.3. Means of identification of type, if marked on the separate technical unit⁽¹¹⁾: ...
 - 0.3.1. Location of that marking: ...
- 0.5. Name and address of manufacturer: ...
- 0.7. In case of separate technical units, location and method of affixing the EC approval mark: ...
- 0.8. Name(s) and address(es) of assembly plant(s): ...
- 0.9. Name and address of the manufacturer's representative (if any): ...
- 9.7. Windscreen washer
 - 9.7.1. Detailed technical description (including photographs or drawings): ...
Explanatory notes
.....

PART 2

EC type-approval certificate

MODELFormat: A4 (210 × 297 mm)EC TYPE-APPROVAL CERTIFICATE

Stamp of type-approval authority

Communication concerning:

— EC type-approval ^a	of a type of windscreen washer system as a separate technical unit
— extension of EC type-approval ^a	
— refusal of EC type-approval ^a	
— withdrawal of EC type-approval ^a	

with regard to Regulation (EU) No 1008/2010, as last amended by Regulation (EU) No .../
...^a

EC type-approval number: ...

Reason for extension: ...

^a Delete where not applicable.

SECTION 1.

- I Make (trade name of manufacturer): ...
- 0.2. Type: ...
- 0.3. Means of identification of type, if marked on the separate technical unit⁽¹²⁾: ...
 - 0.3.1. Location of that marking: ...
- 0.5. Name and address of manufacturer: ...

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details) View outstanding changes

- 0.7. Location and method of affixing of the EC approval mark: ...
- 0.8. Name(s) and address(es) of assembly plant(s): ...
- 0.9. Name and address of the manufacturer's representative (if any): ...

SECTION.

II

Additional information: see Addendum.

- 2. Technical service responsible for carrying out the tests: ...
- 3. Date of test report: ...
- 4. Number of test report: ...
- 5. Remarks (if any): see Addendum.
- 6. Place: ...
- 7. Date: ...
- 8. Signature: ...

Attachments : Information package
Test report

Addendum

to EC type-approval certificate No ...

- 1. Additional information:
 - 1.1. Brief description of the type of separate technical unit: ...
 - 1.2. Detailed description of the washer system:
 - 1.2.1. Number of nozzles: ...
 - 1.2.2. Number of outlet ports per nozzle: ...
 - 1.2.3. Description of washer line hoses and its mounting to pump and nozzles: ...
 - 1.2.4. Description of washer pump: ...
 - 1.2.5. Fluid storage capacity (litre): ...
- 2. Suitable for hand of drive: left/right⁽¹³⁾
- 3. Any part of the system may be situated in the engine compartment: yes/no⁽¹³⁾
- 4. Separate technical unit: universal/vehicle specific⁽¹³⁾
- 5. Remarks: ...
- 6. List of vehicle types for which the separate technical unit has been approved (if applicable): ...

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details) View outstanding changes

PART 3

EC separate technical unit type-approval mark

1. The EC separate technical unit type-approval mark shall consist of:
 - 1.1. A rectangle surrounding the lower-case letter ‘e’ followed by the distinguishing number of the Member State which has granted the EC separate technical unit type-approval:

1	for Germany
2	for France
3	for Italy
4	for The Netherlands
5	for Sweden
6	for Belgium
7	for Hungary
8	for the Czech Republic
9	for Spain
11	for the United Kingdom
12	for Austria
13	for Luxembourg
17	for Finland
18	for Denmark
19	for Romania
20	for Poland
21	for Portugal
23	for Greece
24	for Ireland
[^{F1} 25	for Croatia]
26	for Slovenia
27	for Slovakia
29	for Estonia
32	for Latvia
34	for Bulgaria
36	for Lithuania
49	for Cyprus
50	for Malta


Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details) View outstanding changes

Textual Amendments

F1 Inserted by Commission Regulation (EU) No 519/2013 of 21 February 2013 adapting certain regulations and decisions in the fields of free movement of goods, freedom of movement for persons, right of establishment and freedom to provide services, company law, competition policy, agriculture, food safety, veterinary and phytosanitary policy, fisheries, transport policy, energy, taxation, statistics, social policy and employment, environment, customs union, external relations, and foreign, security and defence policy, by reason of the accession of Croatia.

- 1.2. In the vicinity of the rectangle the ‘base approval number’ contained in Section 4 of the type-approval number preceded by the two figures indicating the sequence number assigned to this Regulation or latest major technical amendment to this Regulation. The sequence number is ‘00’ at present.
2. The EC separate technical unit type-approval mark shall be affixed to the windscreen washer fluid storage container in such a way as to be indelible as well as clearly and easily legible even if the device is fitted to a vehicle.
3. An example of an EC separate technical unit type-approval mark is shown in Figure 1.
Figure 1

Example of EC separate technical unit type-approval mark

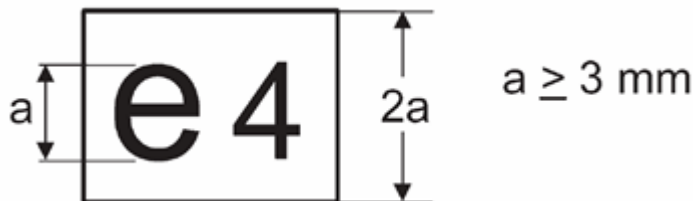

Explanatory note

Legend

The EC separate technical unit type-approval was issued by The Netherlands under number 0046. The first two digits ‘00’ indicate that the separate technical unit was approved according to this Regulation.

ANNEX III

Requirements for windscreen wiper and washer systems

1. SPECIFIC REQUIREMENTS
 - 1.1. Windscreen wiper system.
 - 1.1.1. Every vehicle shall be equipped with a windscreen wiper system which is able to function when the vehicle master control switch has been activated, without any

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details) View outstanding changes

action by the driver other than switching the operating control, needed for starting and stopping the windscreen wiper system, to the on position.

- 1.1.1.1. The windscreen wiper system shall consist of one or more wiper arms which shall have wiper blades that are easily replaceable.
- 1.1.2. The windscreen wiper field shall cover at least 98 % of vision area A, as determined in accordance with Appendix 3 to Annex III.
- 1.1.3. The windscreen wiper field shall cover at least 80 % of vision area B, as determined in accordance with Appendix 3 to Annex III.
- 1.1.4. The windscreen wiper field shall meet the requirements of paragraph 1.1.2. and 1.1.3. when the system is operating at a sweep frequency corresponding to paragraph 1.1.5.1. and shall be tested under the conditions as set out in paragraph 2.1.10. to 2.1.10.3. of this Annex.
- 1.1.5. The windscreen wiper system shall have at least two sweep frequency settings:
 - 1.1.5.1. One frequency of not less than 10 and not more than 55 cycles per minute.
 - 1.1.5.2. One frequency of not less than 45 complete cycles per minute.
 - 1.1.5.3. The difference between the highest and a lower sweep frequency setting shall be at least 15 cycles per minute.
 - 1.1.5.4. Intermittent operation of the windscreen wiper system may be used to comply with the requirements of paragraph 1.1.5.1. to 1.1.5.3. of this Annex.
- 1.1.6. The frequencies referred to in paragraph 1.1.5. to 1.1.5.3. shall be tested under the conditions as set out in paragraph 2.1.1. to 2.1.6 and 2.1.8. of this Annex.
- 1.1.7. When the windscreen wiper system is stopped as a result of switching the operating control to the off position, the wiper arm(s) and blade(s) shall return to their position of rest.
- 1.1.8. The windscreen wiper system shall be capable of withstanding stalling for at least 15 seconds. The use of automatic circuit protection devices is allowed, provided that for possible resetting no action is required other than operation of the windscreen wiper operating control.
- 1.1.9. The capability to withstand stalling of the windscreen wiper system referred to in paragraph 1.1.8. shall be tested under the conditions as set out in paragraph 2.1.7. of this Annex.
- 1.1.10. If the position of rest of the windscreen wiper arm(s) or blade(s) is not outside of vision area B, as determined in accordance with Appendix 3 to Annex III, it shall be possible to manually displace the wiper arm(s) in such a manner that the wiper blade(s) can be lifted from its position on the windscreen to allow that the windscreen is manually cleaned.
- 1.1.11. The windscreen wiper system shall be capable of operating for two minutes on a dry windscreen in an ambient temperature of – 18 °C, without degradation of performance.
- 1.1.12. The performance of the windscreen wiper system at – 18 °C shall be tested under the conditions as set out in paragraph 2.1.11. of this Annex.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details) View outstanding changes

- 1.1.13. The windscreen wiper system shall continue to meet the requirements of paragraph 1.1.2. of this Annex without any degradation of efficiency, when it is operating at maximum frequency and when the vehicle is subjected to a relative air speed equal to 80 % of the vehicle's maximum design speed or 160 km/h, whichever is lower. Vision area A of the windshield shall be prepared in accordance with paragraph 2.1.8. and 2.1.9. of this Annex. The aerodynamic effects associated with the size and shape of the windscreen, wiper arm(s) and wiper blade(s) shall be verified under these conditions, also taking into account paragraph 2.1.9.1. During the test, the wiper blade(s) shall remain in contact with the windscreen and complete lift-off shall not be permitted. The wiper blade(s) shall stay in full contact with the windscreen in the area as established in paragraph 1.1.2. for each complete cycle and any partial lift-off during upwards as well as downwards stroke shall not be permitted.
- 1.2. Windscreen washer system.
 - 1.2.1. Every vehicle shall be fitted with a windscreen washer system which is able to function when the vehicle master control switch has been activated, and which is capable of withstanding the loads and pressures resulting when the nozzles are plugged and the system is actuated in accordance with the procedure set out in paragraph 2.2.1.1. to 2.2.1.1.2. of this Annex.
 - 1.2.2. The performance of the windscreen washer system shall not be adversely affected by exposure to the temperature cycles in accordance with paragraph 2.2.1. to 2.2.5. of this Annex.
 - 1.2.3. The windscreen washer system shall have the ability to spray fluid onto the target area of the windscreen, without any trace of leakage, disconnection of any tubing and malfunctioning of any nozzle, at normal conditions when subjected to ambient temperatures between – 18 °C and 80 °C. In addition, when the nozzles are blocked, the system shall also show no signs of leakage and disconnection of any tubing.
 - 1.2.4. The windscreen washer system shall be capable of delivering sufficient fluid to clear at least 60 % of vision area A, as determined in accordance with Appendix 3 to Annex III, under the conditions as set out in paragraph 2.2.6. to 2.2.6.4. of this Annex.
 - 1.2.5. The windscreen washer system shall be capable of being manually activated by means of the washer control. In addition, activation and deactivation of the system may also be coordinated and combined with any other vehicle system.
 - 1.2.6. The capacity of the reservoir containing the liquid shall not be less than 1,0 litre.
2. TEST PROCEDURE
 - 2.1. Windscreen wiper system test conditions.
 - 2.1.1. The tests described below shall be carried out under the conditions as stated in paragraph 2.1.2. to 2.1.5. unless specified otherwise.
 - 2.1.2. The ambient temperature shall be between 5 °C and 40 °C.
 - 2.1.3. The windscreen shall be kept constantly wet.
 - 2.1.4. In the case of an electric windscreen wiper system, the following additional conditions shall be met.
 - 2.1.4.1. All batteries shall be fully charged at the start of the test.

Changes to legislation: *There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details) View outstanding changes*

- 2.1.4.2. The engine, if fitted, shall run at a speed not exceeding 30 % of the speed corresponding to its maximum power output. However, if this is proven not to be practicable due to specific engine control strategies, for instance in the case of electric hybrid vehicles, a realistic scenario taking into account the engine speeds, periodical absence or complete absence of a running engine during normal driving conditions, shall be determined. If the windscreen wiper system can meet the requirements without a running engine, the engine does not have to run at all.
- 2.1.4.3. The passing beam headlamps shall be switched on.
- 2.1.4.4. All fitted heating, ventilation, defrosting and demisting systems (regardless of the location in the vehicle) shall be operating at maximum electrical consumption.
- 2.1.5. Compressed air or vacuum operated windscreen wiper systems shall be able to function continuously at the prescribed sweep frequencies whatever the engine speed and engine load or minimum and maximum battery charge levels specified by the manufacturer for normal operation.
- 2.1.6. The sweep frequencies of the windscreen wiper system shall comply with the requirements of paragraph 1.1.5. to 1.1.5.3. of this Annex after a preliminary operating time of 20 minutes on a wet windshield.
- 2.1.7. The requirements of paragraph 1.1.8. of this Annex shall be satisfied when the wiper arms are restrained in a position corresponding to half a cycle, for a period of 15 seconds with the windscreen wiper control set at the maximum sweep frequency.
- 2.1.8. The outer face of the windscreen shall be thoroughly degreased by means of methylated spirit or an equivalent degreasing agent. After drying, a solution of ammonia of not less than 3 % and not more than 10 % shall be applied. The surface shall be allowed to dry again and shall then be wiped with a dry cotton cloth.
- 2.1.9. A coating of the test mixture, in accordance with the specifications as laid down in Appendix 4 to Annex III, shall be applied uniformly to the outer surface of the windscreen and allowed to dry.
- 2.1.9.1. Where the outer face of the windscreen has been prepared in accordance with paragraph 2.1.8. and 2.1.9., the windscreen washer system may be used during the applicable tests.
- 2.1.10. The wiper field of the windscreen wiper system, as prescribed in paragraph 1.1.4. of this Annex, shall be determined as follows.
- 2.1.10.1. The outer face of the windscreen shall be treated in accordance with paragraph 2.1.8. and 2.1.9.
- 2.1.10.2. In order to verify that the requirements of paragraph 1.1.2. and 1.1.3. of this Annex are met, the windscreen wiper system shall be activated, taking into account paragraph 2.1.9.1., and a trace of the wiper field shall be made and compared to a trace of the vision areas A and B, as determined in accordance with Appendix 3 to Annex III.
- 2.1.10.3. The technical service may agree to an alternative test procedure (eg. virtual testing) to verify that the requirements of paragraph 1.1.2. and 1.1.3. of this Annex are met.
- 2.1.11. The requirements of paragraph 1.1.11. shall be met at an ambient temperature of -18 ± 3 °C at which the vehicle has been stored for a minimum of four hours. The vehicle shall be prepared to operate under the conditions as set out in paragraph 2.1.4.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details) View outstanding changes

to 2.1.5. During the test, the wiper system shall be operating normally, but at the maximum sweep frequency. The wiper field does not have to be observed.

2.2. Windscreen washer system test conditions.

2.2.1. Test No 1. The windscreen washer system shall be filled with water, fully primed, and placed in an ambient temperature of 20 ± 2 °C for a minimum of four hours. The water shall be stabilized at this temperature.

2.2.1.1. All nozzle outlets shall be plugged and the windscreen washer control shall be actuated six times in one minute, each time for at least three seconds.

2.2.1.1.1. If the windscreen washer system is powered by the muscular energy of the driver, the force applied shall be 11,0 to 13,5 daN in case of a hand operated pump. The force applied shall be 40,0 to 44,5 daN in case of a foot operated pump.

2.2.1.1.2. In case of electric pumps, the test voltage shall not be less than the rated voltage and not more than the rated voltage plus 2 Volt.

2.2.1.2. The performance of the windscreen washer system at the end of the test shall be in compliance with paragraph 1.2.3. of this Annex.

2.2.2. Test No 2. The windscreen washer system shall be filled with water, fully primed, and placed in an ambient temperature of -18 ± 3 °C for a minimum of four hours. The water does not have to be stabilized at this temperature.

2.2.2.1. The windscreen washer control shall be actuated six times in one minute, each time for at least three seconds, in accordance with paragraph 2.2.1.1.1. and 2.2.1.1.2. The system shall then be placed in an ambient temperature of 20 ± 2 °C until the ice has completely thawed. The water does not have to be stabilized at this temperature. The performance of the windscreen washer system shall then be verified by actuating the system in accordance with paragraph 2.2.1.1. to 2.2.1.2.

2.2.3. Test No 3. Low temperature cycle exposure test.

2.2.3.1. The windscreen washer system shall be filled with water, fully primed, and placed in an ambient temperature of -18 ± 3 °C for a minimum of four hours so that the total mass of the water in the washer system is frozen. The system shall then be placed in an ambient temperature of 20 ± 2 °C until the ice has completely thawed, but in any case no longer than four hours. This freeze/thaw cycle shall be repeated six times. Finally, when the windscreen washer system is placed in the ambient temperature of 20 ± 2 °C and the ice has completely thawed, although the water does not have to be stabilized at this temperature, the performance of the windscreen washer system shall be verified by actuating the system in accordance with paragraph 2.2.1.1. to 2.2.1.2.

2.2.3.2. The windscreen washer system shall be filled and fully primed with a low-temperature windscreen washer fluid consisting of a 50 % solution of methanol, or alternatively isopropyl alcohol, in water with a hardness not exceeding 205 mg/l (Ca). The system shall be placed in an ambient temperature of -18 ± 3 °C for a minimum of four hours. The fluid does not have to be stabilized at this temperature. The performance of the windscreen washer system shall then be verified by actuating the system in accordance with paragraph 2.2.1.1. to 2.2.1.2.

2.2.4. Test No 4. High temperature cycle exposure test.

2.2.4.1. If any part of the windscreen washer system is situated in the engine compartment, the system shall be filled with water, fully primed, and placed in an ambient temperature

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details) View outstanding changes

of 80 ± 3 °C for a minimum of eight hours. The water does not have to be stabilized at this temperature. The performance of the windscreen washer system shall then be verified by actuating the system in accordance with paragraph 2.2.1.1. to 2.2.1.2.

- 2.2.4.2. If no part of the windscreen washer system is situated in the engine compartment, the system shall be filled with water, fully primed, and placed in an ambient temperature of 80 ± 3 °C for a minimum of eight hours. The water does not have to be stabilized at this temperature. Subsequently, the system is placed in an ambient temperature of 20 ± 2 °C. When the temperature of the water has stabilized, the performance of the windscreen washer system shall be verified by actuating the system in accordance with paragraph 2.2.1.1. to 2.2.1.2. After this, the system shall be filled with water, fully primed, and placed in an ambient temperature of 60 ± 3 °C for a minimum of eight hours. The water does not have to be stabilized at this temperature. The performance of the windscreen washer system shall then be verified by actuating the system in accordance with paragraph 2.2.1.1. to 2.2.1.2. Alternatively, the manufacturer may request that the windscreen washer system is tested under the conditions as set out in paragraph 2.2.4.1.
- 2.2.5. The windscreen washer tests as set out in paragraph 2.2.1. to 2.2.4.2. shall be carried out in sequence on the same windscreen washer system. The system may be either tested as installed on the vehicle type for which EC type-approval is sought, or separately. In case EC type-approval is sought for a separate technical unit, the system shall be tested separately.
- 2.2.6. Test No 5. Windscreen washer system capability test
- 2.2.6.1. The windscreen washer system shall be filled with water and fully primed. With the vehicle stationary and no significant wind effect, the nozzle(s) may, if possible, be adjusted as to being pointed towards the target area on the outer face of the windscreen.
- 2.2.6.2. The outer face of the windscreen shall be treated as prescribed in paragraph 2.1.8 and 2.1.9. of this Annex.
- 2.2.6.3. The windscreen washer system shall be actuated according to the manufacturer's instructions, taking into account paragraph 2.2.1.1.1 and 2.2.1.1.2. of this Annex. The total duration of the test shall not exceed 10 complete cycles of automatic operation of the windscreen wiper system operating at the maximum sweep frequency.
- 2.2.6.4. In order to verify that the requirements of paragraph 1.2.4. of this Annex are met, a trace of the relevant cleaned area shall be made and compared to a trace of the vision area A, as determined in accordance with Appendix 3 to Annex III. If it is clearly obvious to the observer that the requirements are met, it is not required that the traces are prepared.
- 2.2.7. The test as set out in paragraph 2.2.6. to 2.2.6.4. shall always be performed on the vehicle type for which EC type-approval is sought, even in the case when an approved separate technical unit is installed on the vehicle.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details) [View outstanding changes](#)

Appendix 1

Procedure for verification of the R-point or seating reference point

The R-point or seating reference point is established in accordance with the provisions laid down in Annex 3 to UNECE Regulation No 17⁽¹⁴⁾.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details) [View outstanding changes](#)

Appendix 2

Procedure for determining primary reference marks in the three-dimensional reference system

The dimensional relationships between primary reference marks on drawings and their position on the actual vehicle are established in accordance with the provisions laid down in Annex 4 to UNECE Regulation No 125⁽¹⁵⁾.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details) [View outstanding changes](#)

Appendix 3

Procedure for determining vision areas on windcreens of vehicles

The vision areas A and B are established in accordance with the provisions laid down in Annex 18 to UNECE Regulation No 43.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details) View outstanding changes

Appendix 4

Specifications of the test mixture for testing the windscreen wiper and washer systems

1. The test mixture referred to in paragraph 2.1.9. of Annex III shall consist of the following:
 - 1.1. Water, with a hardness of less than 205 mg/l (Ca): 92,5 % by volume.
 - 1.2. Aqueous saturated salt (sodium chloride), solution: 5,0 % by volume.
 - 1.3. Dust, in accordance with the specifications of paragraph 1.3.1. to 1.3.2.6. below: 2,5 % by volume.
 - 1.3.1. Specifications of the test dust analysis
 - 1.3.1.1. 68 ± 1 % SiO_2 by mass
 - 1.3.1.2. 4 ± 1 % Fe_2O_3 by mass
 - 1.3.1.3. 16 ± 1 % Al_2O_3 by mass
 - 1.3.1.4. 3 ± 1 % CaO by mass
 - 1.3.1.5. $1,0 \pm 0,5$ % MgO by mass
 - 1.3.1.6. 4 ± 1 % Alkalis by mass
 - 1.3.1.7. $2,5 \pm 0,5$ % Ignition loss by mass
 - 1.3.2. Specifications of the particle-size distribution in course-grade dust
 - 1.3.2.1. 12 ± 2 % of 0 to 5 μm particle-size
 - 1.3.2.2. 12 ± 3 % of 5 to 10 μm particle-size
 - 1.3.2.3. 14 ± 3 % of 10 to 20 μm particle-size
 - 1.3.2.4. 23 ± 3 % of 20 to 40 μm particle-size
 - 1.3.2.5. 30 ± 3 % of 40 to 80 μm particle-size
 - 1.3.2.6. 9 ± 3 % of 80 to 200 μm particle-size

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details) View outstanding changes

- (1) If the means of identification of type contains characters not relevant to describe the vehicle, component or separate technical unit types covered by this information document, such characters shall be represented in the documentation by the symbol ‘?’ (e.g. ABC??123??).
- (2) Classified according to the definitions set out in Directive 2007/46/EC Part A of Annex II.
- (3) In the case of a vehicle that can run either on petrol, diesel, etc., or also in combination with another fuel, items shall be repeated. In the case of non-conventional engines and systems, particulars equivalent to those referred to here shall be supplied by the manufacturer.
- (4) Determined in accordance with the requirements of Council Directive 80/1269/EEC (OJ L 375, 31.12.1980, p. 46).
- (5) Delete where not applicable.
- (6) The specified particulars are to be given for any proposed variants.
- (7) With respect to trailers, maximum speed permitted by the manufacturer.
- (8) If the means of identification of type contains characters not relevant to describe the vehicle, component or separate technical unit types covered by this information document, such characters shall be represented in the documentation by the symbol ‘?’ (e.g. ABC??123??).
- (9) As defined in Directive 2007/46/EC, Annex II, Section A.
- (10) Delete as appropriate.
- (11) If the means of identification of type contains characters not relevant to describe the vehicle, component or separate technical unit types covered by this information document, such characters shall be represented in the documentation by the symbol ‘?’ (e.g. ABC??123??).
- (12) If the means of identification of type contains characters not relevant to describe the vehicle, component or separate technical unit types covered by this information document, such characters shall be represented in the documentation by the symbol ‘?’ (e.g. ABC??123??).
- (13) Delete as appropriate.
- (14) OJ L 373, 27.12.2006, p. 1.
- (15) OJ L 200, 31.7.2010, p. 38.

Changes to legislation:

There are outstanding changes not yet made to Commission Regulation (EU) No 1008/2010. Any changes that have already been made to the legislation appear in the content and are referenced with annotations.

View outstanding changes

Changes and effects yet to be applied to :

- Regulation words substituted by S.I. 2022/1273 reg. 60(2)(b)
- Annex 1 Pt. 1 notes words substituted by S.I. 2022/1273 reg. 60(9)(a)(i)
- Annex 1 Pt. 1 notes words substituted by S.I. 2022/1273 reg. 60(9)(a)(ii)
- Annex 1 Pt. 2 words substituted by S.I. 2022/1273 reg. 60(9)(b)(i)
- Annex 2 Pt. 3 point 1.1 substituted by S.I. 2022/1273 reg. 60(10)(c)(ii)
- Annex 2 Pt. 3 point 3 image substituted by S.I. 2022/1273 reg. 60(10)(c)(iv)(bb)
- Annex 2 Pt. 1 point 000.7 word substituted by S.I. 2022/1273 reg. 60(10)(a)
- Annex 2 Pt. 2 word substituted by S.I. 2022/1273 reg. 60(10)(b)(ii)
- Annex 2 Pt. 3 heading word substituted by S.I. 2022/1273 reg. 60(10)(c)(i)
- Annex 2 Pt. 3 point 1 word substituted by S.I. 2022/1273 reg. 60(10)(c)(i)
- Annex 2 Pt. 3 point 2 word substituted by S.I. 2022/1273 reg. 60(10)(c)(iii)
- Annex 2 Pt. 3 point 3 word substituted by S.I. 2022/1273 reg. 60(10)(c)(iv)(aa)
- Annex 2 Pt. 3 point 3 note word substituted by S.I. 2022/1273 reg. 60(10)(c)(v)(aa)
- Annex 2 Pt. 3 point 3 note words omitted by S.I. 2022/1273 reg. 60(10)(c)(v)(bb)
- Annex 2 Pt. 2 words substituted by S.I. 2022/1273 reg. 60(10)(b)(i)
- Art. 1 words substituted by S.I. 2022/1273 reg. 60(3)
- Art. 3(3)(4) words substituted by S.I. 2022/1273 reg. 60(2)(a)
- Art. 3(3) words substituted by S.I. 2022/1273 reg. 60(4)(a)
- Art. 3(3) words substituted by S.I. 2022/1273 reg. 60(4)(b)
- Art. 4 heading words substituted by S.I. 2022/1273 reg. 60(5)(a)
- Art. 4 words substituted by S.I. 2022/1273 reg. 60(5)(a)
- Art. 4(2) words substituted by S.I. 2022/1273 reg. 60(5)(b)(i)
- Art. 4(2) words substituted by S.I. 2022/1273 reg. 60(5)(b)(ii)
- Art. 4(3) words substituted by S.I. 2022/1273 reg. 60(2)(a)
- Art. 5 heading word substituted by S.I. 2022/1273 reg. 60(6)(a)
- Art. 5 word substituted by S.I. 2022/1273 reg. 60(6)(a)
- Art. 5 words inserted by S.I. 2022/1273 reg. 60(6)(b)
- Art. 6 words omitted by S.I. 2022/1273 reg. 60(7)(a)
- Art. 6 words substituted by S.I. 2022/1273 reg. 60(7)(b)

Changes and effects yet to be applied to the whole legislation item and associated provisions

- Signature words omitted by S.I. 2022/1273 reg. 60(8)
- Annex 1 Pt. 2 s. 1 point 000.4 note words substituted by S.I. 2022/1273 reg. 60(9)(b)(ii)