
Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Commission Regulation (EU) 2017/2400 of 12 December 2017 implementing Regulation (EC) No 595/2009 of the European Parliament and of the Council as regards the determination of the CO₂ emissions and fuel consumption of heavy-duty vehicles and amending Directive 2007/46/EC of the European Parliament and of the Council and Commission Regulation (EU) No 582/2011 (Text with EEA relevance)

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

ANNEX I

CLASSIFICATION OF VEHICLES IN VEHICLE GROUPS

1. Classification of the vehicles for the purpose of this Regulation
 - 1.1 Classification of vehicles of category N

^{F1}TABLE 1

Vehicle groups for vehicles of category N

| Description of elements relevant to the classification in vehicle groups | | | Vehicle group | Allocation of mission profile and vehicle configuration | | | | | | |
|--|---------------------------------------|---|-----------------------------|---|-----------------|-------------------|-------------------------|----------------|-------------------|--------------|
| | | | | Long haul | Long haul (EMS) | Regional delivery | Regional delivery (EMS) | Urban delivery | Municipal utility | Construction |
| Axle configuration | Chassis configuration | Technically permissible maximum laden mass (tons) | | | | | | | | |
| 4 × 2 | Rigid lorry | > 3,5 – 7,5 | (0) | | | | | | | |
| | Rigid lorry (or tractor) ^a | > 7,5 – 10 | 1 | | | R | | R | | |
| | Rigid lorry (or tractor) ^a | > 10 – 12 | 2 | R+T1 | | R | | R | | |
| | Rigid lorry (or tractor) ^a | > 12 – 16 | 3 | | | R | | R | | |
| | Rigid lorry | > 16 | 4 | R+T2 | | R | | R | R | |
| | Tractor | > 16 | 5 | T+ST | T+ST+T2 | T+ST | T+ST+T2 | T+ST | | |
| | Rigid lorry | > 16 | 4 ^v ^b | | | | | | R | R |

a In these vehicle classes tractors are treated as rigid lorries but with specific curb weight of tractor.

b Sub-group 'v' of vehicle groups 4, 5, 9 and 10: these mission profiles are exclusively applicable to vocational vehicles.

(*)EMS — European Modular System

| | | |
|--------|---|-----------------------------|
| T | = | Tractor |
| R | = | Rigid lorry & standard body |
| T1, T2 | = | Standard trailers |
| ST | = | Standard semitrailer |
| D | = | Standard dolly |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | | | | | | |
|-------------|-------------|-------------|------------------------------|------|---------|------|---------|--|--|---|------|
| | Tractor | > 16 | 5 ^v ^b | | | | | | | | T+ST |
| 4 × 4 | Rigid lorry | > 7,5 – 16 | (6) | | | | | | | | |
| | Rigid lorry | > 16 | (7) | | | | | | | | |
| | Tractor | > 16 | (8) | | | | | | | | |
| 6 × 2 | Rigid lorry | all weights | 9 | R+T2 | R+D+ST | R | R+D+ST | | | R | |
| | Tractor | all weights | 10 | T+ST | T+ST+T2 | T+ST | T+ST+T2 | | | | |
| | Rigid lorry | all weights | 9 ^v ^b | | | | | | | R | R |
| | Tractor | all weights | 10 ^v ^b | | | | | | | | T+ST |
| 6 × 4 | Rigid lorry | all weights | 11 | R+T2 | R+D+ST | R | R+D+ST | | | R | R |
| | Tractor | all weights | 12 | T+ST | T+ST+T2 | T+ST | T+ST+T2 | | | | T+ST |
| 6 × 6 | Rigid lorry | all weights | (13) | | | | | | | | |
| | Tractor | all weights | (14) | | | | | | | | |
| 8 × 2 | Rigid lorry | all weights | (15) | | | | | | | | |
| 8 × 4 | Rigid lorry | all weights | 16 | | | | | | | | R |
| 8 × 6 8 × 8 | Rigid lorry | all weights | (17) | | | | | | | | |

a In these vehicle classes tractors are treated as rigid lorries but with specific curb weight of tractor.

b Sub-group 'v' of vehicle groups 4, 5, 9 and 10: these mission profiles are exclusively applicable to vocational vehicles.

(*)EMS — European Modular System

| | | |
|--------|---|-----------------------------|
| T | = | Tractor |
| R | = | Rigid lorry & standard body |
| T1, T2 | = | Standard trailers |
| ST | = | Standard semitrailer |
| D | = | Standard dolly] |

Textual Amendments

- F1** Substituted by Commission Regulation (EU) 2019/318 of 19 February 2019 amending Regulation (EU) 2017/2400 and Directive 2007/46/EC of the European Parliament and of the Council as regards the determination of the CO₂ emissions and fuel consumption of heavy-duty vehicles (Text with EEA relevance).

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

ANNEX II

REQUIREMENTS AND PROCEDURES RELATED TO THE OPERATION OF THE SIMULATION TOOL

1. The processes to be set up by the vehicle manufacturer with a view to the operation of the simulation tool
 - 1.1. The manufacturer shall set up at least the following processes:
 - 1.1.1 A data management system covering sourcing, storing, handling and retrieving of the input information and input data for the simulation tool as well as handling certificates on the CO₂ emissions and fuel consumption related properties of a component families, separate technical unit families and system families. The data management system shall at least:
 - (a) ensure application of correct input information and input data to specific vehicle configurations
 - (b) ensure correct calculation and application of standard values;
 - (c) verify by means of comparing cryptographic hashes that the input files of component families, separate technical unit families and system families which are used for the simulation corresponds to the input data of the component families, separate technical unit families and system families for which the certification has been granted;
 - (d) include a protected database for storing the input data relating to the component families, separate technical unit families or system families and the corresponding certificates of the CO₂ emissions and fuel consumption related properties;
 - (e) ensure correct management of the changes of specification and updates of components, separate technical units and systems;
 - (f) enable tracing of the components, separate technical units and systems after the vehicle is produced.
 - 1.1.2 A data management system covering retrieving of the input information and input data and calculations by means of the simulation tool and storing of the output data. The data management system shall at least:
 - (a) ensure a correct application of cryptographic hashes;
 - (b) include a protected database for storing the output data;
 - 1.1.3 Process for consulting the dedicated electronic distribution platform referred to in Article 5(2) and Article 10(1) and (2), as well as downloading and installing the latest versions of the simulation tool.
 - 1.1.4 Appropriate training of staff working with the simulation tool.
 2. Assessment by the approval authority
 - 2.1. The approval authority shall verify whether the processes set out in point 1 related to the operation of the simulation tool have been set up.

The approval authority shall also verify the following:

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- (a) the functioning of the processes set out in points 1.1.1, 1.1.2 and 1.1.3 and the application of the requirement set out in point 1.1.4;
- (b) that the processes used during the demonstration are applied in the same manner in all the production facilities manufacturing the vehicle group concerned;
- (c) the completeness of the description of the data and process flows of operations related to the determination of the CO₂ emissions and fuel consumption of the vehicles.

For the purpose of point (a) of the second paragraph, The verification shall include determination of the CO₂ emissions and fuel consumption of at least one vehicle from each of the vehicle groups for which the licence has been applied for.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 1

MODEL OF AN INFORMATION DOCUMENT FOR THE PURPOSES OF OPERATING THE SIMULATION TOOL WITH A VIEW TO DETERMINING THE CO₂ EMISSIONS AND FUEL CONSUMPTION OF NEW VEHICLES

SECTION

I

- 1 Name and address of manufacturer:
- 2 Assembly plants for which the processes referred to in point 1 of Annex II of Regulation (EU) 2017/2400 have been set up with a view to the operation of the simulation tool:
- 3 Vehicle groups covered:
- 4 Name and address of the manufacturer's representative (if any)

SECTION Additional information 1.1.

II

- 1.2 Data and process flow handling description (e.g. flow chart)
- 1.3 Description of quality management process
- 1.4 Additional quality management certificates (if any)
- 1.5 Description of simulation tool data sourcing, handling and storage
- Additional documents (if any)
2. Date: ...
3. Signature: ...

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 2

MODEL OF A LICENCE TO OPERATE THE SIMULATION TOOL WITH A VIEW TO DETERMINING CO₂ EMISSIONS AND FUEL CONSUMPTION OF NEW VEHICLES

Maximum format: A4 (210 × 297 mm)

LICENCE TO OPERATE THE SIMULATION TOOL WITH A VIEW TO DETERMINING CO₂ EMISSIONS AND FUEL CONSUMPTION OF NEW VEHICLES

| | |
|---------------------------|----------------------|
| Communication concerning: | Administration stamp |
| — granting ^a | |
| — extension ^a | |
| — refusal ^a | |
| — withdrawal ^a | |

a Delete where not applicable (there are cases where nothing needs to be deleted when more than one entry is applicable)

of the licence to operate simulation tool with regard to Regulation (EC) No 595/2009 as implemented by Regulation (EU) 2017/2400.

Licence number:

Reason for extension: ...

SECTION 1

I

Name and address of manufacturer:

0.2 Assembly plants for which the processes referred to in point 1 of Annex II of Commission Regulation (EU) 2017/2400 have been set up with a view to the operation of the simulation tool

0.3 Vehicle groups covered:

SECTION 1.1 Additional information

II

Assessment report performed by an approval authority

1.2.

Data and process flow handling description (e.g. flow chart)

1.3.

Description of quality management process

1.4.

Additional quality management certificates (if any)

1.5.

Description of simulation tool data sourcing, handling and storage

1.6

Additional documents (if any)

2. Approval authority responsible for carrying out the assessment

3. Date of the assessment report

4. Number of assessment report report

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

5. Remarks (if any): see Addendum
6. Place
7. Date
8. Signature

ANNEX III

INPUT INFORMATION RELATING TO THE CHARACTERISTIC OF THE VEHICLE

1. Introduction

This Annex describes the list of parameters to be provided by the vehicle manufacturer as input to the simulation tool. The applicable XML schema as well as example data are available at the dedicated electronic distribution platform.

2. Definitions

- (1) [^{F1}‘Parameter ID’: Unique identifier as used in the simulation tool for a specific input parameter or set of input data]
- (2) ‘Type’: Data type of the parameter

| | |
|------------------|---|
| string | sequence of characters in ISO8859-1 encoding |
| ... | |
| token | sequence of characters in ISO8859-1 encoding, no leading/trailing whitespace |
| ... | |
| date ... | date and time in UTC time in the format: YYYY-MM-DDTHH:MM:SSZ with italic letters denoting <i>fixed characters</i> e.g. ‘2002-05-30T09:30:10Z’ |
| integer | value with an integral data type, no leading zeros, e.g. ‘1800’ |
| ... | |
| double, X ... | fractional number with exactly X digits after the decimal sign (‘.’) and no leading zeros e.g. for ‘double, 2’: ‘2345.67’; for ‘double, 4’: ‘45.6780’ |
- (3) ‘Unit’ ... physical unit of the parameter
- (4) ‘corrected actual mass of the vehicle’ shall mean the mass as specified under the ‘actual mass of the vehicle’ in accordance with Commission Regulation (EC) No 1230/2012⁽¹⁾ with an exception for the tank(s) which shall be filled to at least 50 % of its or their capacity/ies, without superstructure and corrected by the additional weight of the non-installed standard equipment as specified in point 4.3 and the mass of a standard body, standard semi-trailer or standard trailer to simulate the complete vehicle or complete vehicle-(semi-)trailer combination.

All parts that are mounted on and above the main frame are regarded as superstructure parts if they are only installed for facilitating a superstructure, independent of the necessary parts for in running order conditions.

3. Set of input parameters

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

^{F1}TABLE 1

Input parameters ‘Vehicle/General’

| Parameter name | Parameter ID | Type | Unit | Description/ Reference |
|-----------------------|---------------------|-------------|-------------|--|
| Manufacturer | P235 | token | [-] | |
| ManufacturerAddress | P2352 | token | [-] | |
| Model | P236 | token | [-] | |
| VIN | P238 | token | [-] | |
| Date | P239 | dateTime | [-] | Date and time when the component-hash is created |
| LegislativeClass | P251 | string | [-] | Allowed values: ‘N2’, ‘N3’ |
| VehicleCategory | P036 | string | [-] | Allowed values: ‘Rigid Lorry’, ‘Tractor’ |
| AxleConfiguration | P037 | string | [-] | Allowed values: ‘4×2’, ‘6×2’, ‘6×4’, ‘8×4’ |
| CurbMassChassis | P038 | int | [kg] | |
| GrossVehicleMass | P041 | int | [kg] | |
| IdlingSpeed | P198 | int | [1/min] | |
| RetarderType | P052 | string | [-] | Allowed values: ‘None’, ‘Losses included in Gearbox’, ‘Engine Retarder’, ‘Transmission Input Retarder’, ‘Transmission Output Retarder’ |
| RetarderRatio | P053 | double, 3 | [-] | |
| AngledriveType | P180 | string | [-] | Allowed values: ‘None’, ‘Losses included in Gearbox’, ‘Separate Angledrive’ |
| PTOShaftsGearWheels | P247 | string | [-] | Allowed values: ‘none’, ‘only |

a In case of multiple PTOs mounted to the transmission, only the component with the highest losses according to point 3.6 of Annex IX, for its combination of criteria ‘PTOShaftsGearWheels’ and ‘PTOShaftsOtherElements’, shall be declared.]

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | |
|---------------------|------|---------|-----|---|
| | | | | the drive shaft of the PTO’, ‘drive shaft and/or up to 2 gear wheels’, ‘drive shaft and/or more than 2 gear wheels’, ‘only one engaged gearwheel above oil level’ |
| PTOOtherElements | P248 | string | [-] | Allowed values: ‘none’, ‘shift claw, synchronizer, sliding gearwheel’, ‘multi-disc clutch’, ‘multi-disc clutch, oil pump’ |
| CertificationNumber | P249 | token | [-] | |
| CertificationNumber | P262 | token | [-] | |
| CertificationNumber | P261 | token | [-] | |
| CertificationNumber | P264 | token | [-] | |
| CertificationNumber | P265 | token | [-] | |
| CertificationNumber | P266 | token | [-] | |
| CertificationNumber | P267 | token | [-] | |
| CertificationNumber | P268 | token | [-] | |
| ZeroEmissionVehicle | P269 | boolean | [-] | |
| VocationalVehicle | P270 | boolean | [-] | |
| NgTankSystem | P275 | string | [-] | Allowed values: ‘Compressed’, ‘Liquefied’ Only relevant for vehicles with engines of fuel type ‘NG PI’ (P193) |
| Sleeper cab | P276 | boolean | [-] | |

a In case of multiple PTOs mounted to the transmission, only the component with the highest losses according to point 3.6 of Annex IX, for its combination of criteria ‘PTOShaftsGearWheels’ and ‘PTOShaftsOtherElements’, shall be declared.]

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

TABLE 2

Input parameters ‘Vehicle/AxleConfiguration’ per wheel axle

| Parameter name | Parameter ID | Type | Unit | Description/Reference |
|----------------|--------------|---------|------|---|
| TwinTyres | P045 | boolean | [-] | |
| AxleType | P154 | string | [-] | Allowed values: ‘VehicleNonDriven’, ‘VehicleDriven’ |
| Steered | P195 | boolean | | |

TABLE 3

Input parameters ‘Vehicle/Auxiliaries’

| Parameter name | Parameter ID | Type | Unit | Description/Reference |
|----------------|--------------|--------|------|---|
| Fan/Technology | P181 | string | [-] | Allowed values: ‘Crankshaft mounted - Electronically controlled visco clutch’, ‘Crankshaft mounted - Bimetallic controlled visco clutch’, ‘Crankshaft mounted - Discrete step clutch’, ‘Crankshaft mounted - On/off clutch’, ‘Belt driven or driven via transm. - Electronically controlled visco clutch’, ‘Belt driven or driven via transm. - Bimetallic controlled visco clutch’, ‘Belt driven or driven via transm. - Discrete step clutch’, ‘Belt driven or driven via transm. - On/off clutch’, |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | |
|--------------------------------|------|--------|-----|--|
| | | | | ‘Hydraulic driven - Variable displacement pump’, ‘Hydraulic driven - Constant displacement pump’, ‘Electrically driven - Electronically controlled’ |
| SteeringPump/ Technology | P182 | string | [-] | Allowed values: ‘Fixed displacement’, ‘Fixed displacement with elec. control’, ‘Dual displacement’, ‘Variable displacement mech. controlled’, ‘Variable displacement elec. controlled’, ‘Electric’ Separate entry for each steered wheel axle required |
| ElectricSystem/ Technology | P183 | string | [-] | Allowed values: ‘Standard technology’, ‘Standard technology - LED headlights, all’ |
| PneumaticSystem/ Technology | P184 | string | [-] | Allowed values: ‘Small’, ‘Small + ESS’, ‘Small + visco clutch’, ‘Small + mech. clutch’, ‘Small + ESS + AMS’, ‘Small + visco clutch + AMS’, ‘Small + mech. clutch + AMS’, |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | |
|--|--|--|--|--|
| | | | | <p>‘Medium Supply 1-stage’, ‘Medium Supply 1-stage + ESS’, ‘Medium Supply 1-stage + visco clutch’, ‘Medium Supply 1-stage + mech. clutch’, ‘Medium Supply 1-stage + ESS + AMS’, ‘Medium Supply 1-stage + visco clutch + AMS’, ‘Medium Supply 1-stage + mech. clutch + AMS’, ‘Medium Supply 2-stage’, ‘Medium Supply 2-stage + ESS’, ‘Medium Supply 2-stage + visco clutch’, ‘Medium Supply 2-stage + mech. clutch’, ‘Medium Supply 2-stage + ESS + AMS’, ‘Medium Supply 2-stage + visco clutch + AMS’, ‘Medium Supply 2-stage + mech. clutch + AMS’, ‘Large Supply’, ‘Large Supply + ESS’, ‘Large Supply + visco clutch’, ‘Large Supply + mech. clutch’, ‘Large Supply + ESS + AMS’, ‘Large Supply + visco clutch + AMS’, ‘Large Supply + mech. clutch + AMS’, ‘Vacuum pump’</p> |
|--|--|--|--|--|

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | |
|-------------------------------------|------|--------|-----|------------------------------------|
| [^{F1} HVAC/ Technology | P185 | string | [-] | Allowed values: 'None', 'Default'] |
|-------------------------------------|------|--------|-----|------------------------------------|

TABLE 4

Input parameters 'Vehicle/EngineTorqueLimits' per gear (optional)

| Parameter name | Parameter ID | Type | Unit | Description/Reference |
|----------------|--------------|---------|------|---|
| Gear | P196 | integer | [-] | only gear numbers need to be specified where vehicle related engine torque limits according to point 6 are applicable |
| MaxTorque | P197 | integer | [Nm] | |

^{F2}TABLE 5

Input parameters for ZE-HDVs, He-HDVs and dual-fuel vehicles

| Parameter name | Parameter ID | Type | Unit | Description/Reference |
|---------------------|--------------|----------|------|--|
| Manufacturer | P235 | token | [-] | |
| ManufacturerAddress | P235 | token | [-] | |
| Model | P236 | token | [-] | |
| VIN | P238 | token | [-] | |
| Date | P239 | dateTime | [-] | Date and time when the component-hash is created |
| LegislativeClass | P251 | string | [-] | Allowed values: 'N2', 'N3' |
| VehicleCategory | P036 | string | [-] | Allowed values: 'Rigid Lorry', 'Tractor' |
| CurbMassChassis | P038 | int | [kg] | |
| GrossVehicleMass | P041 | int | [kg] | |
| MaxNetPower1 | P277 | int | [W] | If He-HDV = Y: highest maximum net power of all energy converters, |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | |
|-----------------|------|---------|-----|---|
| | | | | which are linked to the vehicle driveline or the wheels |
| MaxNetPower2 | P278 | int | [W] | If He-HDV = Y: second highest maximum net power of all energy converters, which are linked to the vehicle driveline or the wheels |
| ZE-HDV | P269 | boolean | [-] | |
| He-HDV | P279 | boolean | [-] | |
| DualFuelVehicle | P280 | boolean | [-] |] |

Textual Amendments

F2 Inserted by Commission Regulation (EU) 2019/318 of 19 February 2019 amending Regulation (EU) 2017/2400 and Directive 2007/46/EC of the European Parliament and of the Council as regards the determination of the CO₂ emissions and fuel consumption of heavy-duty vehicles (Text with EEA relevance).

F2 TABLE 6

Input parameters ‘Advanced driver assistance systems’

| Parameter name | Parameter ID | Type | Unit | Description/Reference |
|--------------------------|--------------|---------|------|---|
| EngineStopStart | P271 | boolean | [-] | In accordance with point 8.1.1 |
| EcoRollWithoutEngineStop | P272 | boolean | [-] | In accordance with point 8.1.2 |
| EcoRollWithEngineStop | P273 | boolean | [-] | In accordance with point 8.1.3 |
| PredictiveCruiseControl | P274 | string | [-] | In accordance with point 8.1.4, allowed values: ‘1,2’, ‘1,2,3’] |

4. Vehicle mass

4.1 The vehicle mass used as input for the simulation tool shall be the corrected actual mass of the vehicle.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

This corrected actual mass shall be based on vehicles equipped in such a way that they are compliant to all regulatory acts of Annex IV and Annex XI to Directive 2007/46/EC applicable to the particular vehicle class.

4.2 If not all the standard equipment is installed, the manufacturer shall add the weight of the following construction elements to the corrected actual mass of the vehicle:

- (a) Front under-run protection in accordance with Regulation (EC) No 661/2009 of the European Parliament and of the Council⁽²⁾
- (b) Rear under-run protection in accordance with Regulation (EC) No 661/2009 of the European Parliament and of the Council
- (c) Lateral protection in accordance with Regulation (EC) No 661/2009 of the European Parliament and of the Council
- (d) Fifth wheel in accordance with Regulation (EC) No 661/2009 of the European Parliament and of the Council

4.3 The weight of the construction elements referred to in point 4.2 shall be the following:
For vehicles of groups 1, 2 and 3

- (a) 45 kg
Front under-ride protection
- (b) 40 kg
Rear under-ride protection
- (c) $8,5 \text{ kg/m} \times \text{wheel base [m]} - 2,5 \text{ kg}$
Lateral protection

For vehicles of groups 4, 5, 9 to 12 and 16

- (a) 50 kg
Front under-ride protection
- (b) 45 kg
Rear under-ride protection
- (c) $14 \text{ kg/m} \times \text{wheel base [m]} - 17 \text{ kg}$
Lateral protection
- (d) 210 kg
Fifth wheel

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Textual Amendments

- F3** Deleted by [Commission Regulation \(EU\) 2019/318 of 19 February 2019 amending Regulation \(EU\) 2017/2400 and Directive 2007/46/EC of the European Parliament and of the Council as regards the determination of the CO₂ emissions and fuel consumption of heavy-duty vehicles \(Text with EEA relevance\)](#).

5. Hydraulically and mechanically driven axles

In case of vehicles equipped with:

- (a) a hydraulically driven axles, the axle shall be treated as a non-drivable one and the manufacturer shall not take it into consideration for establishing an axle configuration of a vehicle;
- (b) a mechanically driven axles, the axle shall be treated as a drivable one and the manufacturer shall take it into consideration for establishing an axle configuration of a vehicle;

6. Gear dependent engine torque limits set by vehicle control

For the highest 50 % of the gears (e.g. for gears 7 to 12 of a 12 gear transmission) the vehicle manufacturer may declare a gear dependent maximum engine torque limit which is not higher than 95 % of the maximum engine torque.

7. Vehicle specific engine idling speed

- 7.1. The engine idling speed has to be declared in VECTO for each individual vehicle. This declared vehicle engine idling shall be equal or higher than specified in the engine input data approval.

[^{F2}8. Advanced driver assistance systems

- 8.1. The following types of advanced driver assistance systems, which are primarily aiming for reduction of fuel consumption and CO₂ emissions, shall be declared in the input to the simulation tool:

- 8.1.1. Engine stop-start during vehicle stops: system which automatically shuts down and restarts the internal combustion engine during vehicle stops to reduce engine idling time. For automatic engine shut down the maximum time delay after the vehicle stop shall be not longer than 3 seconds.

- 8.1.2. Eco-roll without engine stop-start: system which automatically decouples the internal combustion engine from the drivetrain during specific downhill driving conditions with low negative gradients. During these phases the internal combustion engine is operated in engine idling. The system shall be active at least at all cruise control set speeds above 60 km/h.

- 8.1.3. Eco-roll with engine stop-start: system which automatically decouples the internal combustion engine from the drivetrain during specific downhill driving conditions with low negative slopes. During these phases the internal combustion engine is shut down after a short time delay and keeps shut down during the main share of the eco-roll phase. The system shall be active at least at all cruise control set speeds of above 60 km/h.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

8.1.4. Predictive cruise control (PCC): systems which optimise the usage of potential energy during a driving cycle based on an available preview of road gradient data and the use of a GPS system. A PCC system declared in the input to the simulation tool shall have a gradient preview distance longer than 1 000 metres and cover all following functionalities:

(1) Crest coasting

Approaching a crest the vehicle velocity is reduced before the point where the vehicle starts accelerating by gravity alone compared to the set speed of the cruise control so that the braking during the following downhill phase can be reduced.

(2) Acceleration without engine power

During downhill driving with a low vehicle velocity and a high negative slope the vehicle acceleration is performed without any engine power usage so that the downhill braking can be reduced.

(3) Dip coasting

During downhill driving when the vehicle is braking at the overspeed velocity, PCC increases the overspeed for a short period of time to end the downhill event with a higher vehicle velocity. Overspeed is a higher vehicle speed than the set speed of the cruise control system.

A PCC system can be declared as input to the simulation tool if either the functionalities set out in points (1) and (2) or points (1), (2) and (3) are covered.

8.2. The eleven combinations of the advanced driver assistance systems as set out in Table 7 are input parameters into the simulation tool:

Table 7

Combinations of advanced driver assistance systems as input parameters into the simulation tool

| Combination No | Engine stop-start during vehicle stops | Eco-roll without engine stop-start | Eco-roll with engine stop-start | Predictive cruise control |
|-----------------------|---|---|--|----------------------------------|
| 1 | yes | no | no | no |
| 2 | no | yes | no | no |
| 3 | no | no | yes | no |
| 4 | no | no | no | yes |
| 5 | yes | yes | no | no |
| 6 | yes | no | yes | no |
| 7 | yes | no | no | yes |
| 8 | no | yes | no | yes |
| 9 | no | no | yes | yes |
| 10 | yes | yes | no | yes |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Table 7

Combinations of advanced driver assistance systems as input parameters into the simulation tool

| | | | | |
|----|-----|----|-----|-----|
| 11 | yes | no | yes | yes |
|----|-----|----|-----|-----|

8.3. Any advanced driver assistance system declared in the input into the simulation tool shall by default be set to fuel economy mode after each key-off/key-on cycle.

8.4. If an advanced driver assistance system is declared in the input into the simulation tool, it shall be possible to verify the presence of such a system based on real world driving and the system definitions as set out in point 8.1. If a certain combination of systems is declared, also the interaction of functionalities (e.g. predictive cruise control plus eco-roll with engine stop-start) shall be demonstrated. In the verification procedure it shall be taken into consideration, that the systems need certain boundary conditions to be ‘active’ (e.g. engine at operation temperature for engine stop-start, certain vehicle speed ranges for PCC, certain ratios of road gradients with vehicle mass for eco-roll). The vehicle manufacturer needs to submit a functional description of boundary conditions when the systems are ‘inactive’ or their efficiency is reduced. The approval authority may request the technical justifications of these boundary conditions from the applicant for approval and assess them for compliance.]

ANNEX IV

**MODEL OF THE MANUFACTURER'S RECORDS
FILE AND OF THE CUSTOMER INFORMATION FILE**

PART I

Vehicle CO₂ emissions and fuel consumption – Manufacturer's records file

The manufacturer's records file will be produced by the simulation tool and shall at least contain the following information:

1. Vehicle, component, separate technical unit and systems data
 - 1.1. Vehicle data
 - 1.1.1. Name and address of manufacturer
 - 1.1.2. Vehicle model
 - 1.1.3. Vehicle identification number (VIN) ...
 - 1.1.4. Vehicle category (N1 N2, N3, M1, M2, M3) ...
 - 1.1.5. Axle configuration ...
 - 1.1.6. Max. gross vehicle weight (t) ...
 - 1.1.7. Vehicle group in accordance with Table 1 ...

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 1.1.8. Corrected actual curb mass (kg) ...
- [^{F2}1.1.9. Vocational vehicle (yes/no) ...
- 1.1.10. Zero emission heavy-duty vehicle (yes/no) ...
- 1.1.11. Hybrid electric heavy-duty vehicle (yes/no) ...
- 1.1.12. Dual-fuel vehicle (yes/no) ...
- 1.1.13. Sleeper cab (yes/no) ...]
- 1.2. Main engine specifications
 - 1.2.1. Engine model
 - 1.2.2. Engine certification number ...
 - 1.2.3. Engine rated power (kW) ...
 - 1.2.4. Engine idling speed (1/min) ...
 - 1.2.5. Engine rated speed (1/min) ...
 - 1.2.6. Engine capacity (ltr) ...
 - [^{F1}1.2.7. Fuel type (Diesel CI/CNG PI/LNG PI...) ...
 - 1.2.8. Hash of the engine input data and input information ...]
- 1.3. Main transmission specifications
 - 1.3.1. Transmission model
 - 1.3.2. Transmission certification number ...
 - 1.3.3. Main option used for generation of loss maps (Option1/Option2/Option3/Standard values) ...:
 - 1.3.4. Transmission type (SMT, AMT, APT-S, APT-P) ...
 - 1.3.5. Nr. of gears ...
 - 1.3.6. Transmission ratio final gear ...
 - 1.3.7. Retarder type ...
 - 1.3.8. Power take off (yes/no) ...
 - [^{F1}1.3.9. Hash of the transmission input data and input information ...]
- 1.4. Retarder specifications
 - 1.4.1. Retarder model
 - 1.4.2. Retarder certification number ...
 - 1.4.3. Certification option used for generation of a loss map (standard values/measurement) ...
 - [^{F1}1.4.4. Hash of the other torque transferring components input data and input information ...]

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 1.5. Torque converter specification
 - 1.5.1. Torque converter model
 - 1.5.2. Torque converter certification number ...
 - 1.5.3. Certification option used for generation of a loss map (standard values/measurement) ...
 - [^{F1}1.5.4. Hash of the torque converter input data and input information ...]
- 1.6. Angle drive specifications
 - 1.6.1. Angle drive model
 - 1.6.2. Axle certification number ...
 - 1.6.3. Certification option used for generation of a loss map (standard values/measurement) ...
 - 1.6.4. Angle drive ratio ...
 - [^{F1}1.6.5. Hash of the additional driveline components input data and input information ...]
- 1.7. Axle specifications
 - 1.7.1. Axle model ...
 - 1.7.2. Axle certification number ...
 - 1.7.3. Certification option used for generation of a loss map (standard values/measurement) ...
 - 1.7.4. Axle type (e.g. standard single driven axle) ...
 - 1.7.5. Axle ratio ...
 - [^{F1}1.7.6. Hash of the axle input data and input information ...]
- 1.8. Aerodynamics
 - 1.8.1. Model
 - 1.8.2. Certification option used for generation of CdxA (standard values /measurement) ...
 - 1.8.3. CdxA Certification number (if applicable) ...
 - 1.8.4. CdxA value ...
 - [^{F1}1.8.5. Hash of the air drag input data and input information ...]
- 1.9. Main tyre specifications
 - 1.9.1. Tyre dimension axle 1 ...
 - 1.9.2. Tyre certification number ...
 - 1.9.3. Specific RRC of all tyres on axle 1 ...
 - [^{F2}1.9.3a. Hash of the tyre input data and input information axle 1 ...]

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 1.9.4. Tyre dimension axle 2 ...
- 1.9.5. Twin axle (yes/no) axle 2 ...
- 1.9.6. Tyre certification number ...
- 1.9.7. Specific RRC of all tyres on axle 2 ...
- [^{F2}1.9.7a. Hash of the tyre input data and input information axle 2 ...]
- 1.9.8. Tyre dimension axle 3 ...
- 1.9.9. Twin axle (yes/no) axle 3 ...
- 1.9.10. Tyre certification number ...
- 1.9.11. Specific RRC of all tyres on axle 3 ...
- [^{F2}1.9.11a. Hash of the tyre input data and input information axle 3 ...]
- 1.9.12. Tyre dimension axle 4 ...
- 1.9.13. Twin axle (yes/no) axle 4 ...
- 1.9.14. Tyre certification number ...
- 1.9.15. Specific RRC of all tyres on axle 4 ...
- [^{F2}1.9.16. Hash of the tyre input data and input information axle 4 ...]
- 1.10. Main auxiliary specifications
 - 1.10.1. Engine cooling fan technology ...
 - 1.10.2. Steering pump technology ...
 - 1.10.3. Electric system technology ...
 - 1.10.4. Pneumatic system technology ...
- 1.11. Engine torque limitations
 - 1.11.1. Engine torque limit at gear 1 (% of max engine torque) ...
 - 1.11.2. Engine torque limit at gear 2 (% of max engine torque) ...
 - 1.11.3. Engine torque limit at gear 3 (% of max engine torque) ...
 - 1.11.4. Engine torque limit at gear ... (% of max engine torque)
- [^{F2}1.12. Advanced driver assistance systems (ADAS)
 - 1.12.1. Engine stop-start during vehicle stops (yes/no) ...
 - 1.12.2. Eco-roll without engine stop-start (yes/no) ...
 - 1.12.3. Eco-roll with engine stop-start (yes/no) ...
 - 1.12.4. Predictive cruise control (yes/no) ...]
- 2. Mission profile and loading dependent values

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 2.1. Simulation parameters (for each profile/load/fuel combination)
 - [^{F1}2.1.1. Mission profile (long haul/long haul (EMS)/regional/regional (EMS)/urban/municipal/construction) ...]
 - 2.1.2. Load (as defined in the simulation tool) (kg) ...
 - 2.1.3. Fuel (diesel/petrol/LPG/CNG/...) ...
 - 2.1.4. Total vehicle mass in simulation (kg) ...
- 2.2. Vehicle driving performance and information for simulation quality check
 - 2.2.1. Average speed (km/h) ...
 - 2.2.2. Minimum instantaneous speed (km/h) ...
 - 2.2.3. Maximum instantaneous speed (km/h) ...
 - 2.2.4. Maximum deceleration (m/s²) ...
 - 2.2.5. Maximum acceleration (m/s²) ...
 - 2.2.6. Full load percentage on driving time ...
 - 2.2.7. Total number of gear shifts ...
 - 2.2.8. Total driven distance (km) ...
- 2.3. Fuel and CO₂ results
 - 2.3.1. Fuel consumption (g/km) ...
 - 2.3.2. Fuel consumption (g/t-km) ...
 - 2.3.3. Fuel consumption (g/p-km) ...
 - 2.3.4. Fuel consumption (g/m³-km) ...
 - 2.3.5. Fuel consumption (l/100km) ...
 - 2.3.6. Fuel consumption (l/t-km) ...
 - 2.3.7. Fuel consumption (l/p-km) ...
 - 2.3.8. Fuel consumption (l/m³-km) ...
 - 2.3.9. Fuel consumption (MJ/km) ...
 - 2.3.10. Fuel consumption (MJ/t-km) ...
 - 2.3.11. Fuel consumption (MJ/p-km) ...
 - 2.3.12. Fuel consumption (MJ/m³-km) ...
 - 2.3.13. CO₂ (g/km) ...
 - 2.3.14. CO₂ (g/t-km) ...
 - 2.3.15. CO₂ (g/p-km) ...

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 2.3.16. CO₂ (g/m³-km) ...
- 3. Software and user information
 - 3.1. Software and user information
 - 3.1.1. Simulation tool version (X.X.X) ...
 - 3.1.2. Date and time of the simulation
 - 3.1.3. Hash of simulation tool input information and input data ...
 - [^{F1}3.1.4. Cryptographic hash of the manufacturer's records file ...]

PART II

Vehicle CO₂ emissions and fuel consumption - Customer information file

- 1. Vehicle, component, separate technical unit and systems data
 - 1.1. Vehicle data
 - 1.1.1. Vehicle identification number (VIN) ...
 - 1.1.2. Vehicle category (N₁ N₂, N₃, M₁, M₂, M₃) ...
 - 1.1.3. Axle configuration ...
 - 1.1.4. Max. gross vehicle weight (t) ...
 - 1.1.5. Vehicle's group ...
 - 1.1.6. Name and address of manufacturer ...
 - [^{F1}1.1.7. Model ...]
 - 1.1.8. Corrected actual curb mass (kg) ...
 - [^{F2}1.1.9. Vocational vehicle (yes/no) ...
 - 1.1.10. Zero emission heavy-duty vehicle (yes/no) ...
 - 1.1.11. Hybrid electric heavy-duty vehicle (yes/no) ...
 - 1.1.12. Dual-fuel vehicle (yes/no) ...
 - 1.1.13. Sleeper cab (yes/no) ...]
 - 1.2. Component, separate technical unit and systems data
 - 1.2.1. Engine rated power (kW) ...
 - 1.2.2. Engine capacity (ltr) ...
 - [^{F1}1.2.3. Fuel type (Diesel CI/CNG PI/LNG PI...) ...]
 - 1.2.4. Transmission values (measured/standard) ...
 - 1.2.5. Transmission type (SMT, AMT, AT-S, AT-S) ...

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

1.2.6. Nr. of gears ...

1.2.7. Retarder (yes/no) ...

1.2.8. Axle ratio ...

[^{F1}1.2.9. Average rolling resistance coefficient (RRC) of all tyres of the motor vehicle: ...]

[^{F2}1.2.10. Average fuel efficiency labelling class of all tyres of the motor vehicle in accordance with Regulation (EC) No 1222/2009 ...

1.2.11. Engine stop-start during vehicle stops (yes/no) ...

1.2.12. Eco-roll without engine stop-start (yes/no) ...

1.2.13. Eco-roll with engine stop-start (yes/no) ...

1.2.14. Predictive cruise control (yes/no) ...]

[^{F2}2. CO₂ emissions and fuel consumption of the vehicle (for each payload/mission profile)

2.1. Payload low [kg]:

| | Average vehicle speed | CO ₂ emissions | | | Fuel consumption | | |
|--------------------------------|-----------------------|---------------------------|------------|--------------------------|------------------|------------|--------------------------|
| Long haul | ... km/h | ... g/km | ... g/t-km | ... g/m ³ -km | ... l/100km | ... l/t-km | ... l/m ³ -km |
| Long haul (EMS) | ... km/h | ... g/km | ... g/t-km | ... g/m ³ -km | ... l/100km | ... l/t-km | ... l/m ³ -km |
| Regional delivery | ... km/h | ... g/km | ... g/t-km | ... g/m ³ -km | ... l/100km | ... l/t-km | ... l/m ³ -km |
| Regional delivery (EMS) | ... km/h | ... g/km | ... g/t-km | ... g/m ³ -km | ... l/100km | ... l/t-km | ... l/m ³ -km |
| Urban delivery | ... km/h | ... g/km | ... g/t-km | ... g/m ³ -km | ... l/100km | ... l/t-km | ... l/m ³ -km |
| Municipal utility | ... km/h | ... g/km | ... g/t-km | ... g/m ³ -km | ... l/100km | ... l/t-km | ... l/m ³ -km |
| Construction | ... km/h | ... g/km | ... g/t-km | ... g/m ³ -km | ... l/100km | ... l/t-km | ... l/m ³ -km |

2.2. Payload representative [kg]:

| | Average vehicle speed | CO ₂ emissions | Fuel consumption |
|--|-----------------------|---------------------------|------------------|
| | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | | |
|--------------------------------|----------|----------|------------|--------------------------|-------------|------------|--------------------------|
| Long haul | ... km/h | ... g/km | ... g/t-km | ... g/m ³ -km | ... l/100km | ... l/t-km | ... l/m ³ -km |
| Long haul (EMS) | ... km/h | ... g/km | ... g/t-km | ... g/m ³ -km | ... l/100km | ... l/t-km | ... l/m ³ -km |
| Regional delivery | ... km/h | ... g/km | ... g/t-km | ... g/m ³ -km | ... l/100km | ... l/t-km | ... l/m ³ -km |
| Regional delivery (EMS) | ... km/h | ... g/km | ... g/t-km | ... g/m ³ -km | ... l/100km | ... l/t-km | ... l/m ³ -km |
| Urban delivery | ... km/h | ... g/km | ... g/t-km | ... g/m ³ -km | ... l/100km | ... l/t-km | ... l/m ³ -km |
| Municipal utility | ... km/h | ... g/km | ... g/t-km | ... g/m ³ -km | ... l/100km | ... l/t-km | ... l/m ³ -km |
| Construction | ... km/h | ... g/km | ... g/t-km | ... g/m ³ -km | ... l/100km | ... l/t-km | ... l/m ³ -km |

2.3. Specific CO₂ emissions [gCO₂/tkm] ...

2.4. Average payload value [t] ...

2.5. Software and user information

| | |
|---------------------------------|---------|
| Simulation tool version | [X.X.X] |
| Date and time of the simulation | [-] |

3. Cryptographic hash of the manufacturer's records file ...]

^{F3}PART III

CO₂ emissions and fuel consumption of the vehicle (for each payload/fuel combination)

.....

ANNEX V

VERIFYING ENGINE DATA

1. Introduction

The engine test procedure described in this Annex shall produce input data relating to engines for the simulation tool.

2. Definitions

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

For the purposes of this Annex the definitions according to UN/ECE Regulation 49 Rev.06 and, in addition to these, the following definitions shall apply:

- (1) 'engine CO₂-family' means a manufacturer's grouping of engines, as defined in paragraph 1 of Appendix 3;
- (2) 'CO₂-parent engine' means an engine selected from an engine CO₂-family as specified in Appendix 3;
- (3) 'NCV' means net calorific value of a fuel as specified in paragraph 3.2;
- (4) 'specific mass emissions' means the total mass emissions divided by the total engine work over a defined period expressed in g/kWh;
- (5) 'specific fuel consumption' means the total fuel consumption divided by the total engine work over a defined period expressed in g/kWh;
- (6) 'FCMC' means fuel consumption mapping cycle;
- (7) 'Full load' means the delivered engine torque/power at a certain engine speed when the engine is operated at maximum operator demand.

The definitions in paragraphs 3.1.5 and 3.1.6. of Annex 4 to UN/ECE Regulation 49 Rev.06 shall not apply.

3. General requirements

The calibration laboratory facilities shall comply with the requirements of either ISO/TS 16949, ISO 9000 series or ISO/IEC 17025. All laboratory reference measurement equipment, used for calibration and/or verification, shall be traceable to national or international standards.

Engines shall be grouped into engine CO₂-families defined in accordance with Appendix 3. Paragraph 4.1 explains which testruns shall be performed for the purpose of certification of one specific engine CO₂-family.

3.1 Test conditions

All testruns performed for the purpose of certification of one specific engine CO₂-family defined in accordance with Appendix 3 to this Annex shall be conducted on the same physical engine and without any changes to the setup of the engine dynamometer and the engine system, apart from the exceptions defined in paragraph 4.2 and Appendix 3.

3.1.1 Laboratory test conditions

The tests shall be conducted under ambient conditions meeting the following conditions over the whole testrun:

- (1) The parameter f_a describing the laboratory test conditions, determined in accordance with paragraph 6.1 of Annex 4 to UN/ECE Regulation 49 Rev.06, shall be within the following limits: $0,96 \leq f_a \leq 1,04$.
- (2) The absolute temperature (T_a) of the engine intake air expressed in Kelvin, determined in accordance with paragraph 6.1 of Annex 4 to UN/ECE Regulation 49 Rev.06 shall be within the following limits: $283 \text{ K} \leq T_a \leq 303 \text{ K}$.
- (3) The atmospheric pressure expressed in kPa, determined in accordance with paragraph 6.1 of Annex 4 to UN/ECE Regulation 49 Rev.06 shall be within the following limits: $90 \text{ kPa} \leq p_s \leq 102 \text{ kPa}$.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

If tests are performed in test cells that are able to simulate barometric conditions other than those existing in the atmosphere at the specific test site, the applicable f_a value shall be determined with the simulated values of atmospheric pressure by the conditioning system. The same reference value for the simulated atmospheric pressure shall be used for the intake air and exhaust path and all other relevant engine systems. The actual value of the simulated atmospheric pressure for the intake air and exhaust path and all other relevant engine systems shall be within the limits specified in subpoint (3).

In cases where the ambient pressure in the atmosphere at the specific test site exceeds the upper limit of 102 kPa, tests in accordance with this Annex may still be performed. In this case tests shall be performed with the specific ambient air pressure in the atmosphere.

In cases where the test cell has the ability to control temperature, pressure and/or humidity of engine intake air independent of the atmospheric conditions the same settings for those parameters shall be used for all testruns performed for the purpose of certification of one specific engine CO₂-family defined in accordance with Appendix 3 to this Annex.

3.1.2 Engine installation

The test engine shall be installed in accordance with paragraphs 6.3 to 6.6 of Annex 4 to UN/ECE Regulation 49 Rev.06.

If auxiliaries/equipment necessary for operating the engine system are not installed as required in accordance with paragraph 6.3 of Annex 4 to UN/ECE Regulation 49 Rev.06, all measured engine torque values shall be corrected for the power required for driving these components for the purpose of this Annex in accordance with paragraph 6.3 of Annex 4 to UN/ECE Regulation 49 Rev.06.

The power consumption of the following engine components resulting in the engine torque required for driving these engine components shall be determined in accordance with Appendix 5 to this Annex:

- (1) fan
- (2) electrically powered auxiliaries/equipment necessary for operating the engine system

3.1.3 Crankcase emissions

In the case of a closed crankcase, the manufacturer shall ensure that the engine's ventilation system does not permit the emission of any crankcase gases into the atmosphere. If the crankcase is of an open type, the emissions shall be measured and added to the tailpipe emissions, following the provisions set out in paragraph 6.10. of Annex 4 to UN/ECE Regulation 49 Rev.06.

3.1.4 Engines with charge air-cooling

During all testruns the charge air cooling system used on the test bed shall be operated under conditions which are representative for in-vehicle application at reference ambient conditions. The reference ambient conditions are defined as 293 K for air temperature and 101,3 kPa for pressure.

The laboratory charge air cooling for tests according to this regulation should comply with the provisions specified in paragraph 6.2 of Annex 4 to UN/ECE Regulation 49 Rev.06.

3.1.5 Engine cooling system

- (1) During all testruns the engine cooling system used on the test bed shall be operated under conditions which are representative for in-vehicle application at reference

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

ambient conditions. The reference ambient conditions are defined as 293 K for air temperature and 101,3 kPa for pressure.

- (2) The engine cooling system should be equipped with thermostats according to the manufacturer specification for vehicle installation. If either a non-operational thermostat is installed or no thermostat is used, subpoint (3) shall apply. The setting of the cooling system shall be performed in accordance with subpoint (4).
- (3) If no thermostat is used or a non-operational thermostat is installed, the test bed system shall reflect the behavior of the thermostat under all test conditions. The setting of the cooling system shall be performed in accordance with subpoint (4).
- (4) [F¹The engine coolant flow rate (or alternatively the pressure difference across the engine side of the heat exchanger) and the engine coolant temperature shall be set to a value representative for in-vehicle application at reference ambient conditions when the engine is operated at rated speed and full load with the engine thermostat in fully open position. This setting defines the coolant reference temperature. For all testruns performed for the purpose of certification of one specific engine within one engine CO₂-family, the cooling system setting shall not be changed, neither on the engine side nor on the test bed side of the cooling system. The temperature of the test bed side cooling medium shall be kept reasonably constant by good engineering judgement. The cooling medium on the test bed side of the heat exchanger shall not exceed the nominal thermostat opening temperature downstream of the heat exchanger.]
- (5) For all testruns performed for the purpose of certification of one specific engine within one engine CO₂-family the engine coolant temperature shall be maintained between the nominal value of the thermostat opening temperature declared by the manufacturer and the coolant reference temperature in accordance with subpoint (4) as soon as the engine coolant has reached the declared thermostat opening temperature after engine cold start.
- (6) For the WHTC coldstart test performed in accordance with paragraph 4.3.3, the specific initial conditions are specified in paragraphs 7.6.1. and 7.6.2 of Annex 4 to UN/ECE Regulation 49 Rev.06. If simulation of the thermostat behaviour in accordance with subpoint (3) is applied, there shall be no coolant flow across the heat exchanger as long as the engine coolant has not reached the declared nominal thermostat opening temperature after cold start.

3.2 Fuels

The respective reference fuel for the engine systems under test shall be selected from the fuel types listed in Table 1. The fuel properties of the reference fuels listed in Table 1 shall be those specified in Annex IX to Commission Regulation (EU) No 582/2011.

To ensure that the same fuel is used for all testruns performed for the purpose of certification of one specific engine CO₂-family no refill of the tank or switch to another tank supplying the engine system shall occur. Exceptionally a refill or switch may be allowed if it can be ensured that the replacement fuel has exactly the same properties as the fuel used before (same production batch).

The NCV for the fuel used shall be determined by two separate measurements in accordance with the respective standards for each fuel type defined in Table 1. The two separate measurements shall be performed by two different labs independent from the manufacturer applying for certification. The lab performing the measurements shall comply with the

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

requirements of ISO/IEC 17025. The approval authority shall ensure that the fuel sample used for determination of the NCV is taken from the batch of fuel used for all testruns.

If the two separate values for the NCV are deviating by more than 440 Joule per gram fuel, the values determined shall be void and the measurement campaign shall be repeated.

[^{F1}The mean value of the two separate NCV that are not deviating by more than 440 Joule per gram fuel shall be documented in MJ/kg rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06.]

For gas fuels the standards for determining the NCV according to Table 1 contain the calculation of the calorific value based on the fuel composition. The gas fuel composition for determining the NCV shall be taken from the analysis of the reference gas fuel batch used for the certification tests. For the determination of the gas fuel composition used for determining the NCV only one single analysis by a lab independent from the manufacturer applying for certification shall be performed. For gas fuels the NCV shall be determined based on this single analysis instead of a mean value of two separate measurements.

[^{F2}For gas fuels, switches between fuel tanks of different production batches are allowed exceptionally; in that case, the NCV of each used fuel batch should be calculated and the highest value should be documented.]

TABLE 1

Reference fuels for testing

| Fuel type / engine type | Reference fuel type | Standard used for determination of NCV |
|----------------------------------|-----------------------------------|--|
| Diesel / CI | B7 | at least ASTM D240 or DIN 59100-1 (ASTM D4809 is recommended) |
| Ethanol / CI | ED95 | at least ASTM D240 or DIN 59100-1 (ASTM D4809 is recommended) |
| Petrol / PI | E10 | at least ASTM D240 or DIN 59100-1 (ASTM D4809 is recommended) |
| Ethanol / PI | E85 | at least ASTM D240 or DIN 59100-1 (ASTM D4809 is recommended) |
| LPG / PI | LPG Fuel B | ASTM 3588 or DIN 51612 |
| [^{F1} Natural gas / PI | G ₂₅ or G _R | ISO 6976 or ASTM 3588] |

3.3 Lubricants

The lubricating oil for all testruns performed in accordance with this Annex shall be a commercially available oil with unrestricted manufacturer approval under normal in-service

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

conditions as defined in paragraph 4.2 of Annex 8 to UN/ECE Regulation 49 Rev.06. Lubricants for which the usage is restricted to certain special operation conditions of the engine system or having an unusually short oil change interval shall not be used for the purpose of testruns in accordance with this Annex. The commercially available oil shall not be modified by any means and no additives shall be added.

All testruns performed for the purpose of certification of the CO₂ emissions and fuel consumption related properties of one specific engine CO₂-family shall be performed with the same type of lubricating oil.

3.4 Fuel flow measurement system

All fuel flows consumed by the whole engine system shall be captured by the fuel flow measurement system. Additional fuel flows not directly supplied to the combustion process in the engine cylinders shall be included in the fuel flow signal for all testruns performed. Additional fuel injectors (e.g. cold start devices) not necessary for the operation of the engine system shall be disconnected from the fuel supply line during all testruns performed.

3.5 Measurement equipment specifications

The measurement equipment shall meet the requirements of paragraph 9 of Annex 4 to UN/ECE Regulation 49 Rev.06.

Notwithstanding the requirements defined in paragraph 9 of Annex 4 to UN/ECE Regulation 49 Rev.06, the measurement systems listed in Table 2 shall meet the limits defined in Table 2.

TABLE 2

Requirements of measurement systems

| Measurement system | Linearity | | | | Accuracy ^a | Rise time ^b |
|----------------------|--|---------------------|--------------------------------------|---|---|------------------------|
| | Intercept $x_{\min} \times (a_1 - 1) + a_0$ | Slope _{a1} | Standard error of estimate SEE | Coefficient of determination ² | | |
| Engine speed | ≤ 0,2 % max calibration ^c | 0,999 - 1,001 | ≤ 0,1 % max calibration ^c | ≥ 0,9985 | 0,2 % of reading or 0,1 % of max. calibration ^c of speed whichever is larger | ≤ 1 s |
| Engine torque | ≤ 0,5 % max calibration ^c | 0,995 - 1,005 | ≤ 0,5 % max calibration ^c | ≥ 0,995 | 0,6 % of reading or 0,3 % of max. calibration ^c | ≤ 1 s |

a 'Accuracy' means the deviation of the analyzer reading from a reference value which is traceable to a national or international standard.

b 'Rise time' means the difference in time between the 10 percent and 90 percent response of the final analyzer reading ($t_{90} - t_{10}$).

c The 'max calibration' values shall be 1,1 times the maximum predicted value expected during all testruns for the respective measurement system.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | |
|---|--------------------------------------|---------------|--------------------------------------|---------|--|-------|
| | | | | | of torque whichever is larger | |
| Fuel mass flow for liquid fuels | ≤ 0,5 % max calibration ^c | 0,995 - 1,005 | ≤ 0,5 % max calibration ^c | ≥ 0,995 | 0,6 % of reading or 0,3 % of max. calibration ^c of flow whichever is larger | ≤ 2 s |
| Fuel mass flow for gaseous fuels | ≤ 1 % max calibration ^c | 0,99 - 1,01 | ≤ 1 % max calibration ^c | ≥ 0,995 | 1 % of reading or 0,5 % of max. calibration ^c of flow whichever is larger | ≤ 2 s |
| Electrical Power | ≤ 1 % max calibration ^c | 0,98 - 1,02 | ≤ 2 % max calibration ^c | ≥ 0,990 | n.a. | ≤ 1 s |
| Current | ≤ 1 % max calibration ^c | 0,98 - 1,02 | ≤ 2 % max calibration ^c | ≥ 0,990 | n.a. | ≤ 1 s |
| Voltage | ≤ 1 % max calibration ^c | 0,98 - 1,02 | ≤ 2 % max calibration ^c | ≥ 0,990 | n.a. | ≤ 1 s |

a 'Accuracy' means the deviation of the analyzer reading from a reference value which is traceable to a national or international standard.

b 'Rise time' means the difference in time between the 10 percent and 90 percent response of the final analyzer reading ($t_{90} - t_{10}$).

c The 'max calibration' values shall be 1,1 times the maximum predicted value expected during all testruns for the respective measurement system.

' x_{\min} ', used for calculation of the intercept value in Table 2, shall be 0,9 times the minimum predicted value expected during all testruns for the respective measurement system.

The signal delivery rate of the measurement systems listed in Table 2, except for the fuel mass flow measurement system, shall be at least 5 Hz (≥ 10 Hz recommended). The signal delivery rate of the fuel mass flow measurement system shall be at least 2 Hz.

All measurement data shall be recorded with a sample rate of at least 5 Hz (≥ 10 Hz recommended).

3.5.1 Measurement equipment verification

A verification of the demanded requirements defined in Table 2 shall be performed for each measurement system. At least 10 reference values between x_{\min} and the 'max calibration' value defined in accordance with paragraph 3.5 shall be introduced to the measurement system and the response of the measurement system shall be recorded as measured value.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

For the linearity verification the measured values shall be compared to the reference values by using a least squares linear regression in accordance with paragraph A.3.2 of Appendix 3 to Annex 4 to UN/ECE Regulation 49 Rev.06.

4. Testing procedure

All measurement data shall be determined in accordance with Annex 4 to UN/ECE Regulation 49 Rev.06, unless stated otherwise in this Annex.

4.1 Overview of testruns to be performed

Table 3 gives an overview of all testruns to be performed for the purpose of certification of one specific engine CO₂-family defined in accordance with Appendix 3.

The fuel consumption mapping cycle in accordance with paragraph 4.3.5 and the recording of the engine motoring curve in accordance with paragraph 4.3.2 shall be omitted for all other engines except the CO₂-parent engine of the engine CO₂-family.

In the case that upon request of the manufacturer the provisions defined in Article 15(5) of this Regulation are applied, the fuel consumption mapping cycle in accordance with paragraph 4.3.5 and the recording of the engine motoring curve in accordance with paragraph 4.3.2 shall be performed additionally for that specific engine.

TABLE 3

Overview of testruns to be performed

| Testrun | Reference to paragraph | Required to be run for CO ₂ -parent engine | Required to be run for other engines within CO ₂ -family |
|--------------------------------|------------------------|---|---|
| Engine full load curve | 4.3.1 | yes | yes |
| Engine motoring curve | 4.3.2 | yes | no |
| WHTC test | 4.3.3 | yes | yes |
| WHSC test | 4.3.4 | yes | yes |
| Fuel consumption mapping cycle | 4.3.5 | yes | no |

4.2 Allowed changes to the engine system

Changing of the target value for the engine idle speed controller to a lower value in the electronic control unit of the engine shall be allowed for all testruns in which idle operation occurs, in order to prevent interference between the engine idle speed controller and the test bed speed controller.

4.3 Testruns

4.3.1 Engine full load curve

The engine full load curve shall be recorded in accordance with paragraphs 7.4.1. to 7.4.5. of Annex 4 to UN/ECE Regulation 49 Rev.06.

4.3.2 Engine motoring curve

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

The recording of the engine motoring curve in accordance with this paragraph shall be omitted for all other engines except the CO₂-parent engine of the engine CO₂-family defined in accordance with Appendix 3. In accordance with paragraph 6.1.3 the engine motoring curve recorded for the CO₂-parent engine of the engine CO₂-family shall also be applicable to all engines within the same engine CO₂-family.

In the case that upon request of the manufacturer the provisions defined in Article 15(5) of this Regulation are applied, the recording of the engine motoring curve shall be performed additionally for that specific engine.

The engine motoring curve shall be recorded in accordance with option (b) in paragraph 7.4.7. of Annex 4 to UN/ECE Regulation 49 Rev.06. This test shall determine the negative torque required to motor the engine between maximum and minimum mapping speed with minimum operator demand.

The test shall be continued directly after the full load curve mapping according to paragraph 4.3.1. At the request of the manufacturer, the motoring curve may be recorded separately. In this case the engine oil temperature at the end of the full load curve testrun performed in accordance with paragraph 4.3.1 shall be recorded and the manufacturer shall prove to the satisfaction of the an approval authority, that the engine oil temperature at the starting point of the motoring curve meets the aforementioned temperature within ± 2 K.

At the start of the testrun for the engine motoring curve the engine shall be operated with minimum operator demand at maximum mapping speed defined in paragraph 7.4.3. of Annex 4 to UN/ECE Regulation 49 Rev.06. As soon as the motoring torque value has stabilized within ± 5 % of its mean value for at least 10 seconds, the data recording shall start and the engine speed shall be decreased at an average rate of $8 \pm 1 \text{ min}^{-1}/\text{s}$ from maximum to minimum mapping speed, which are defined in paragraph 7.4.3. of Annex 4 to UN/ECE Regulation 49 Rev.06.

4.3.3 WHTC test

The WHTC test shall be performed in accordance with Annex 4 to UN/ECE Regulation 49 Rev.06. The weighted emission test results shall meet the applicable limits defined in Regulation (EC) No 595/2009.

The engine full load curve recorded in accordance with paragraph 4.3.1 shall be used for the denormalization of the reference cycle and all calculations of reference values performed in accordance with paragraphs 7.4.6, 7.4.7 and 7.4.8 of Annex 4 to UN/ECE Regulation 49 Rev.06.

4.3.3.1 Measurement signals and data recording

In addition to the provisions defined in Annex 4 to UN/ECE Regulation 49 Rev.06 the actual fuel mass flow consumed by the engine in accordance with paragraph 3.4 shall be recorded.

4.3.4 WHSC test

The WHSC test shall be performed in accordance with Annex 4 to UN/ECE Regulation 49 Rev.06. The emission test results shall meet the applicable limits defined in Regulation (EC) No 595/2009.

The engine full load curve recorded in accordance with paragraph 4.3.1 shall be used for the denormalization of the reference cycle and all calculations of reference values performed in accordance with paragraphs 7.4.6, 7.4.7 and 7.4.8 of Annex 4 to UN/ECE Regulation 49 Rev.06.

4.3.4.1 Measurement signals and data recording

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

In addition to the provisions defined in Annex 4 to UN/ECE Regulation 49 Rev.06 the actual fuel mass flow consumed by the engine in accordance with paragraph 3.4 shall be recorded.

4.3.5 Fuel consumption mapping cycle (FCMC)

The fuel consumption mapping cycle (FCMC) in accordance with this paragraph shall be omitted for all other engines except the CO₂-parent engine of the engine CO₂-family. The fuel map data recorded for the CO₂-parent engine of the engine CO₂-family shall also be applicable to all engines within the same engine CO₂-family.

In the case that upon request of the manufacturer the provisions defined in Article 15(5) of this Regulation are applied, the fuel consumption mapping cycle shall be performed additionally for that specific engine.

The engine fuel map shall be measured in a series of steady state engine operation points, as defined according to paragraph 4.3.5.2. The metrics of this map are the fuel consumption in g/h depending on engine speed in min⁻¹ and engine torque in Nm.

4.3.5.1 Handling of interruptions during the FCMC

If an after-treatment regeneration event occurs during the FCMC for engines equipped with exhaust after-treatment systems that are regenerated on a periodic basis defined in accordance with paragraph 6.6 of Annex 4 to UN/ECE Regulation 49 Rev.06, all measurements at that engine speed mode shall be void. The regeneration event shall be completed and afterwards the procedure shall be continued as described in paragraph 4.3.5.1.1.

If an unexpected interruption, malfunction or error occurs during the FCMC, all measurements at that engine speed mode shall be void and one of the following options how to continue shall be chosen by the manufacturer:

- (1) the procedure shall be continued as described in paragraph 4.3.5.1.1
- (2) the whole FCMC shall be repeated in accordance with paragraphs 4.3.5.4 and 4.3.5.5

4.3.5.1.1 Provisions for continuing the FCMC

The engine shall be started and warmed up in accordance with paragraph 7.4.1. of Annex 4 to UN/ECE Regulation 49 Rev.06. After warm-up, the engine shall be preconditioned by operating the engine for 20 minutes at mode 9, as defined in Table 1 of paragraph 7.2.2. of Annex 4 to UN/ECE Regulation 49 Rev.06.

The engine full load curve recorded in accordance with paragraph 4.3.1 shall be used for the denormalization of the reference values of mode 9 performed in accordance with paragraphs 7.4.6, 7.4.7 and 7.4.8 of Annex 4 to UN/ECE Regulation 49 Rev.06.

Directly after completion of preconditioning, the target values for engine speed and torque shall be changed linearly within 20 to 46 seconds to the highest target torque setpoint at the next higher target engine speed setpoint than the particular target engine speed setpoint where the interruption of the FCMC occurred. If the target setpoint is reached within less than 46 seconds, the remaining time up to 46 seconds shall be used for stabilization.

For stabilization the engine operation shall continue from that point in accordance with the test sequence specified in paragraph 4.3.5.5 without recording of measurement values.

When the highest target torque setpoint at the particular target engine speed setpoint where the interruption occurred is reached, the recording of measurement values shall be continued from that point on in accordance with the test sequence specified in paragraph 4.3.5.5.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

4.3.5.2 Grid of target setpoints

The grid of target setpoints is fixed in a normalized way and consists of 10 target engine speed setpoints and 11 target torque setpoints. Conversion of the normalized setpoint definition to the actual target values of engine speed and torque setpoints for the individual engine under test shall be based on the engine full load curve of the CO₂-parent engine of the engine CO₂-family defined in accordance with Appendix 3 to this Annex and recorded in accordance with paragraph 4.3.1.

4.3.5.2.1 Definition of target engine speed setpoints

The 10 target engine speed setpoints are defined by 4 base target engine speed setpoints and 6 additional target engine speed setpoints.

The engine speeds n_{idle} , n_{lo} , n_{pref} , n_{95h} and n_{hi} shall be determined from the engine full load curve of the CO₂-parent engine of the engine CO₂-family defined in accordance with Appendix 3 to this Annex and recorded in accordance with paragraph 4.3.1 by applying the definitions of characteristic engine speeds in accordance with paragraph 7.4.6. of Annex 4 to UN/ECE Regulation 49 Rev.06.

The engine speed n_{57} shall be determined by the following equation:

$$n_{57} = 0,565 \times (0,45 \times n_{lo} + 0,45 \times n_{pref} + 0,1 \times n_{hi} - n_{idle}) \times 2,0327 + n_{idle}$$

The 4 base target engine speed setpoints are defined as follows:

- (1) Base engine speed 1: n_{idle}
- (2) Base engine speed 2: $n_A = n_{57} - 0,05 \times (n_{95h} - n_{idle})$
- (3) Base engine speed 3: $n_B = n_{57} + 0,08 \times (n_{95h} - n_{idle})$
- (4) Base engine speed 4: n_{95h}

The potential distances between the speed setpoints shall be determined by the following equations:

- (1) $dn_{idleA_44} = (n_A - n_{idle}) / 4$
- (2) $dn_{B95h_44} = (n_{95h} - n_B) / 4$
- (3) $dn_{idleA_35} = (n_A - n_{idle}) / 3$
- (4) $dn_{B95h_35} = (n_{95h} - n_B) / 5$
- (5) $dn_{idleA_53} = (n_A - n_{idle}) / 5$
- (6) $dn_{B95h_53} = (n_{95h} - n_B) / 3$

The absolute values of potential deviations between the two sections shall be determined by the following equations:

- (1) $dn_{44} = ABS(dn_{idleA_44} - dn_{B95h_44})$
- (2) $dn_{35} = ABS(dn_{idleA_35} - dn_{B95h_35})$
- (3) $dn_{53} = ABS(dn_{idleA_53} - dn_{B95h_53})$

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)


[^{F1}The 6 additional target engine speed setpoints shall be determined in accordance with the following provisions:

- (1) If dn_{44} is smaller than or equal to $(dn_{35} + 5)$ and also smaller than or equal to $(dn_{53} + 5)$, the 6 additional target engine speeds shall be determined by dividing each of the two ranges, one from n_{idle} to n_A and the other from n_B to n_{95h} , into 4 equidistant sections.
- (2) If $(dn_{35} + 5)$ is smaller than dn_{44} and also dn_{35} is smaller than dn_{53} , the 6 additional target engine speeds shall be determined by dividing the range from n_{idle} to n_A into 3 equidistant sections and the range from n_B to n_{95h} into 5 equidistant sections.
- (3) If $(dn_{53} + 5)$ is smaller than dn_{44} and also dn_{53} is smaller than dn_{35} , the 6 additional target engine speeds shall be determined by dividing the range from n_{idle} to n_A into 5 equidistant sections and the range from n_B to n_{95h} into 3 equidistant sections.]

Figure 1 exemplarily illustrates the definition of the target engine speed setpoints according to subpoint (1) above.

Figure 1

Definition of speed setpoints

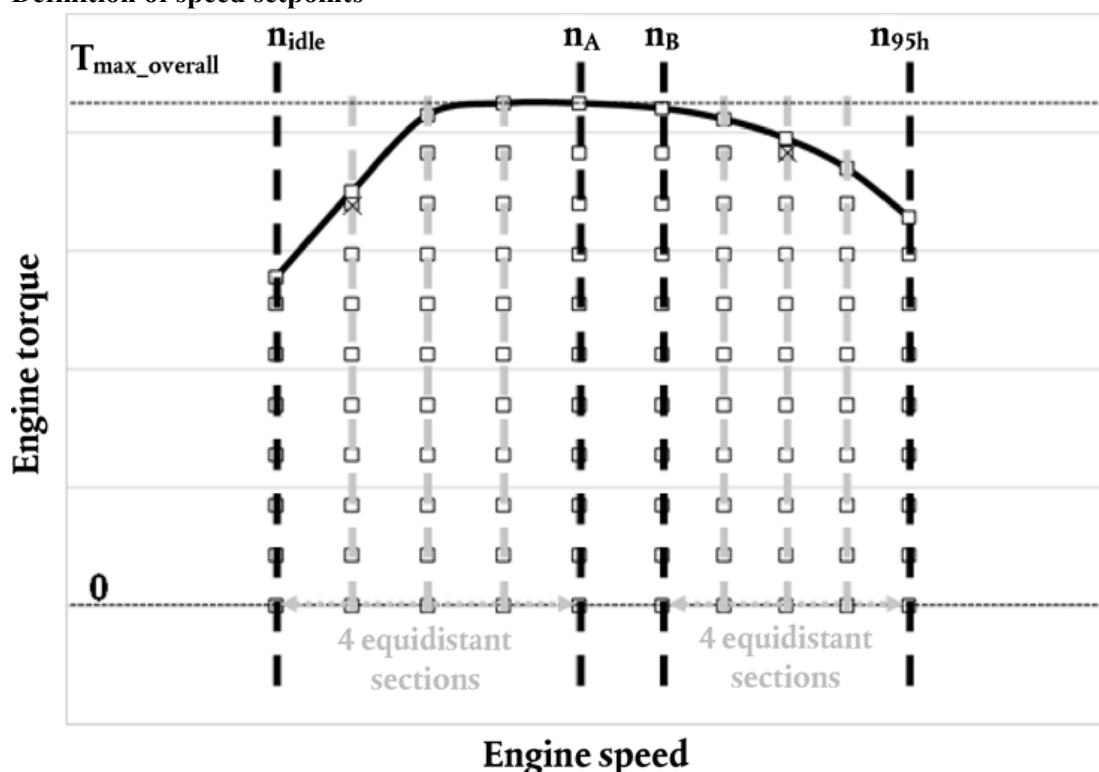

4.3.5.2.2 Definition of target torque setpoints

The 11 target torque setpoints are defined by 2 base target torque setpoints and 9 additional target torque setpoints. The 2 base target torque setpoints are defined by zero engine torque and the maximum engine full load of the CO₂-parent engine determined in accordance with paragraph 4.3.1. (overall maximum torque $T_{max_overall}$). The 9 additional target torque setpoints are determined by dividing the range from zero torque to overall maximum torque, $T_{max_overall}$, into 10 equidistant sections.


Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

[^{F1}All target torque setpoints at a particular target engine speed setpoint that exceed the limit value defined by the full load torque value at this particular target engine speed setpoint minus 5 percent of $T_{\max_overall}$, shall be replaced by one single target torque setpoint at full load torque at this particular target engine speed setpoint. Each of these replacement setpoints shall be measured only once during the FCMC test sequence defined in accordance with paragraph 4.3.5.5. Figure 2 exemplarily illustrates the definition of the target torque setpoints.]

Figure 2

Definition of torque setpoints

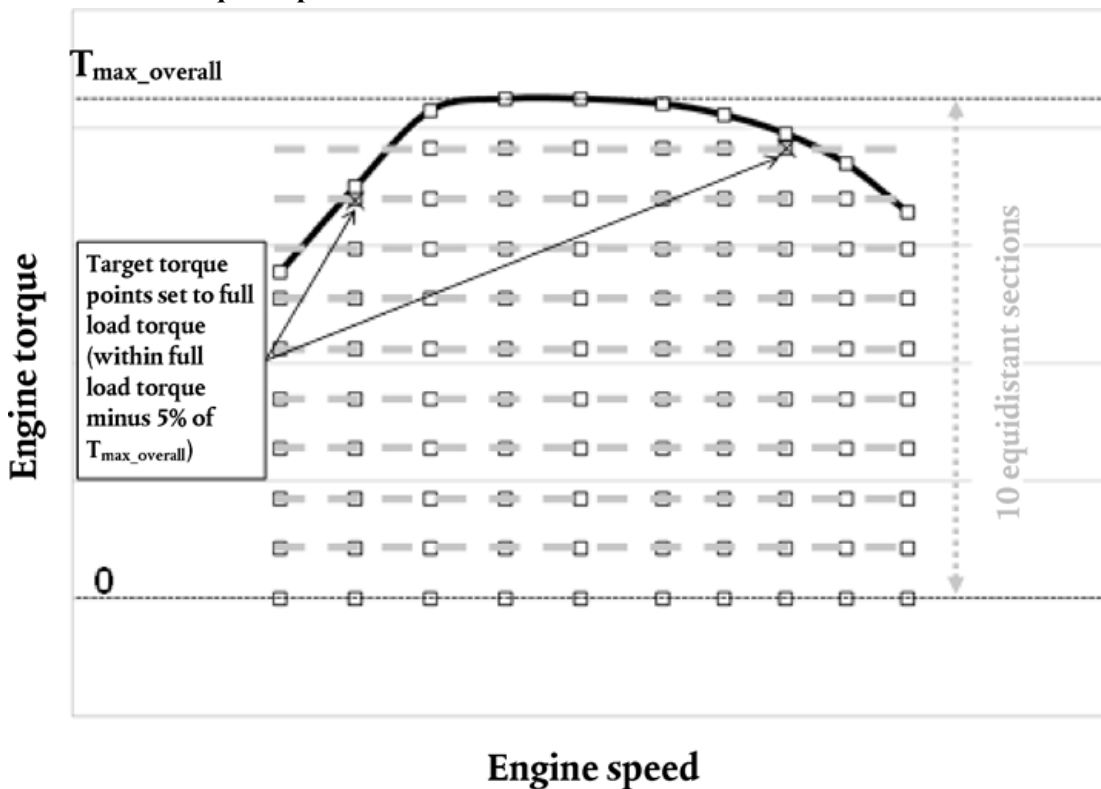

4.3.5.3 Measurement signals and data recording

The following measurement data shall be recorded:

- (1) engine speed
- (2) engine torque corrected in accordance with paragraph 3.1.2
- (3) fuel mass flow consumed by the whole engine system in accordance with paragraph 3.4
- (4) Gaseous pollutants according to the definitions in UN/ECE Regulation 49 Rev.06. Particulate pollutants and ammonia emissions are not required to be monitored during the FCMC testrun.

The measurement of gaseous pollutants shall be carried out in accordance with paragraphs 7.5.1, 7.5.2, 7.5.3, 7.5.5, 7.7.4, 7.8.1, 7.8.2, 7.8.4 and 7.8.5 of Annex 4 to UN/ECE Regulation 49 Rev.06.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

For the purpose of paragraph 7.8.4 of Annex 4 to UN/ECE Regulation 49 Rev.06, the term ‘test cycle’ in the paragraph referred to shall be the complete sequence from preconditioning in accordance with paragraph 4.3.5.4 to ending of the test sequence in accordance with paragraph 4.3.5.5.

4.3.5.4 Preconditioning of the engine system

The dilution system, if applicable, and the engine shall be started and warmed up in accordance with paragraph 7.4.1. of Annex 4 to UN/ECE Regulation 49 Rev.06.

After warm-up is completed, the engine and sampling system shall be preconditioned by operating the engine for 20 minutes at mode 9, as defined in Table 1 of paragraph 7.2.2. of Annex 4 to UN/ECE Regulation 49 Rev.06, while simultaneously operating the dilution system.

The engine full load curve of the CO₂-parent engine of the engine CO₂-family and recorded in accordance with paragraph 4.3.1 shall be used for the denormalization of the reference values of mode 9 performed in accordance with paragraphs 7.4.6, 7.4.7 and 7.4.8 of Annex 4 to UN/ECE Regulation 49 Rev.06.

Directly after completion of preconditioning, the target values for engine speed and torque shall be changed linearly within 20 to 46 seconds to match the first target setpoint of the test sequence according to paragraph 4.3.5.5. If the first target setpoint is reached within less than 46 seconds, the remaining time up to 46 seconds shall be used for stabilization.

4.3.5.5 Test sequence

The test sequence consists of steady state target setpoints with defined engine speed and torque at each target setpoint in accordance with paragraph 4.3.5.2 and defined ramps to move from one target setpoint to the next.

The highest target torque setpoint at each target engine speed shall be operated with maximum operator demand.

The first target setpoint is defined at the highest target engine speed setpoint and highest target torque setpoint.

The following steps shall be performed to cover all target setpoints:

- (1) The engine shall be operated for 95 ± 3 seconds at each target setpoint. The first 55 ± 1 seconds at each target setpoint are considered as a stabilization period,. During the following period of 30 ± 1 seconds the engine speed mean value shall be controlled as follows:
 - (a) The engine speed mean value shall be held at the target engine speed setpoint within ± 1 percent of the highest target engine speed.
 - (b) Except for the points at full load, the engine torque mean value shall be held at the target torque setpoint within a tolerance of ± 20 Nm or ± 2 percent of the overall maximum torque, $T_{\max_overall}$, whichever is greater.

The recorded values in accordance with paragraph 4.3.5.3 shall be stored as averaged value over the period of 30 ± 1 seconds. The remaining period of 10 ± 1 seconds may be used for data post-processing and storage if necessary. During this period the engine target setpoint shall be kept.

- (2) After the measurement at one target setpoint is completed, the target value for engine speed shall be kept constant within $\pm 20 \text{ min}^{-1}$ of the target engine speed setpoint and

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

the target value for torque shall be decreased linearly within 20 ± 1 seconds to match the next lower target torque setpoint. Then the measurement shall be performed according to subpoint (1).

- (3) After the zero torque setpoint has been measured in subpoint (1), the target engine speed shall be decreased linearly to the next lower target engine speed setpoint while at the same time the target torque shall be increased linearly to the highest target torque setpoint at the next lower target engine speed setpoint within 20 to 46 seconds. If the next target setpoint is reached within less than 46 seconds, the remaining time up to 46 seconds shall be used for stabilization. Then the measurement shall be performed by starting the the stabilization procedure according to subpoint (1) and afterwards the target torque setpoints at constant target engine speed shall be adjusted according to subpoint (2).

Figure 3 illustrates the three different steps to be performed at each measurement setpoint for the test according to subpoint (1) above.

Figure 3

Steps to be performed at each measurement setpoint

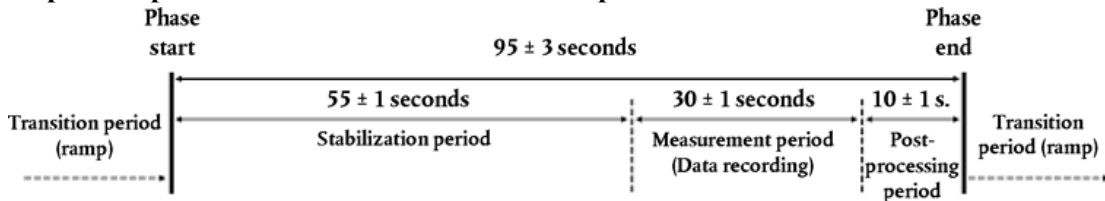



Figure 4 exemplarily illustrates the sequence of steady state measurement setpoints to be followed for the test.

Figure 4

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Sequence of steady state measurement setpoints

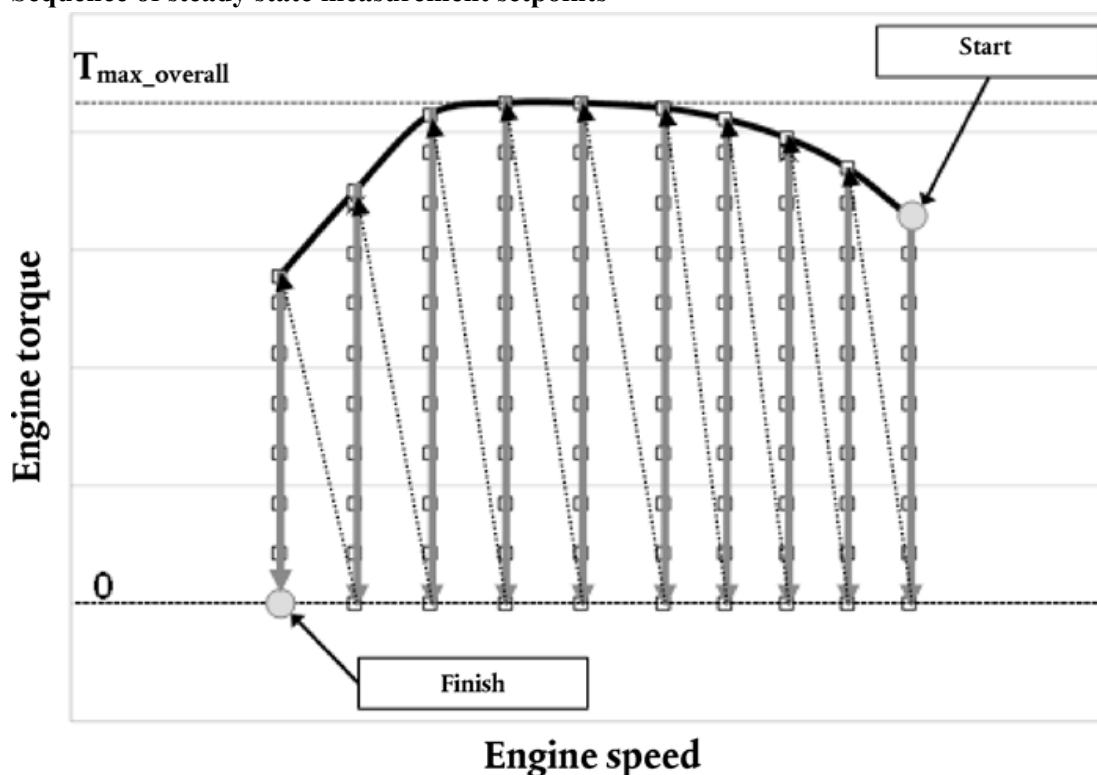

4.3.5.6 Data evaluation for emission monitoring

Gaseous pollutants in accordance with paragraph 4.3.5.3 shall be monitored during the FCMC. The definitions of characteristic engine speeds in accordance with paragraph 7.4.6. of Annex 4 to UN/ECE R.49.06 shall apply.

4.3.5.6.1 Definition of control area

The control area for emission monitoring during the FCMC shall be determined in accordance with paragraphs 4.3.5.6.1.1 and 4.3.5.6.1.2.

4.3.5.6.1.1 Engine speed range for the control area

- (1) The engine speed range for the control area shall be defined based on the engine full load curve of the CO₂-parent engine of the engine CO₂-family defined in accordance with Appendix 3 to this Annex and recorded in accordance with paragraph 4.3.1.
- (2) The control area shall include all engine speeds greater than or equal to the 30th percentile cumulative speed distribution, determined from all engine speeds including idle speed sorted in ascending order, over the hotstart WHTC test cycle performed in accordance with paragraph 4.3.3 (n_{30}) for the engine full load curve referred to the subpoint (1).
- (3) The control area shall include all engine speeds lower than or equal to n_{hi} determined from the engine full load curve referred to in the subpoint (1)

4.3.5.6.1.2 Engine torque and power range for the control area

Status: Point in time view as at 31/01/2020.


Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- (1) The lower boundary of the engine torque range for the control area shall be defined based on the engine full load curve of the engine with the lowest rating of all engines within the engine CO₂-family and recorded in accordance with paragraph 4.3.1.
- (2) The control area shall include all engine load points with a torque value greater than or equal to 30 percent of the maximum torque value determined from the engine full load curve referred to in subpoint (1).
- (3) Notwithstanding the provisions of subpoint (2), speed and torque points below 30 percent of the maximum power value, determined from the engine full load curve referred to in subpoint (1), shall be excluded from the control area.
- (4) Notwithstanding the provisions of subpoints (2) and (3), the upper boundary of the control area shall be based on the engine full load curve of the CO₂-parent engine of the engine CO₂-family defined in accordance with Appendix 3 to this Annex and recorded in accordance with paragraph 4.3.1. The torque value for each engine speed determined from the engine full load curve of the CO₂-parent engine shall be increased by 5 percent of the overall maximum torque, $T_{\max_overall}$, defined in accordance with paragraph 4.3.5.2.2. The modified increased engine full load curve of the CO₂-parent engine shall be used as upper boundary of the control area.

Figure 5 exemplarily illustrates the definition of the engine speed, torque and power range for the control area.

Figure 5

Definition of the engine speed, torque and power range for the control area exemplarily

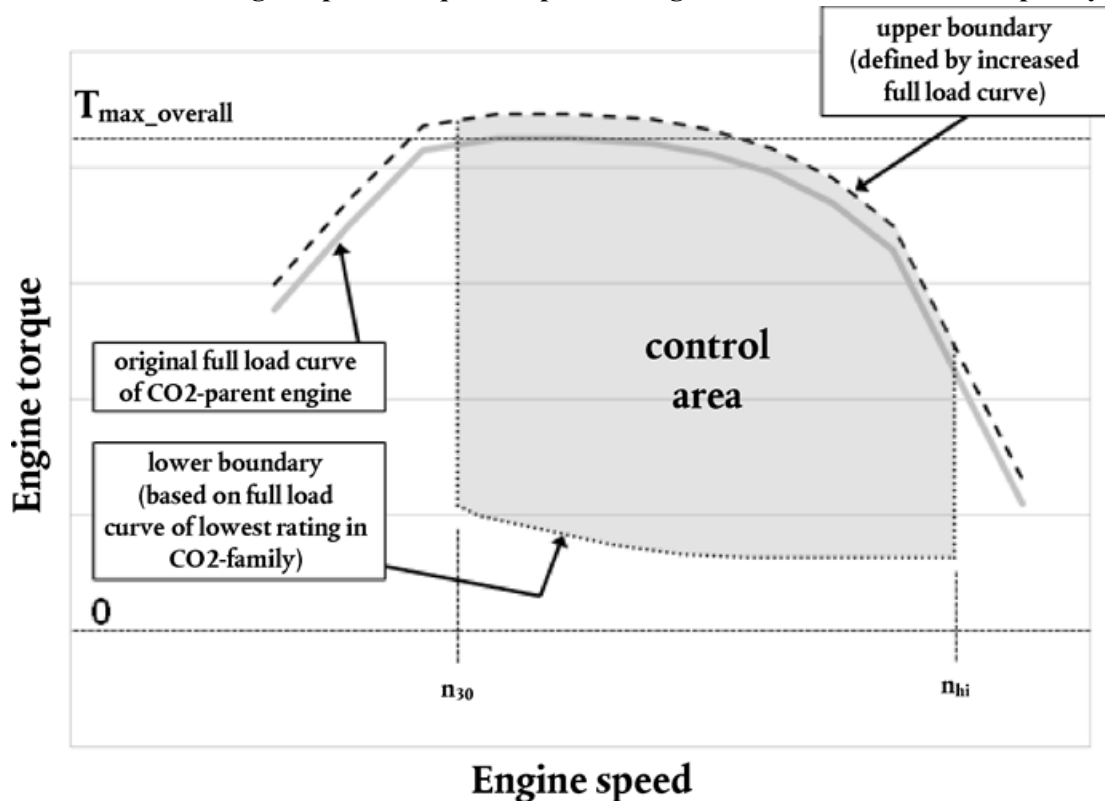

4.3.5.6.2 Definition of the grid cells

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

The control area defined in accordance with paragraph 4.3.5.6.1 shall be divided into a number of grid cells for emission monitoring during the FCMC.

The grid shall comprise of 9 cells for engines with a rated speed less than $3\,000\text{ min}^{-1}$ and 12 cells for engines with a rated speed greater than or equal to $3\,000\text{ min}^{-1}$. The grids shall be defined in accordance with the following provisions:


- (1) The outer boundaries of the grids are aligned to the control area defined according to paragraph 4.3.5.6.1.
- (2) 2 vertical lines spaced at equal distance between engine speeds n_{30} and $1,1$ times n_{95h} for 9 cell grids, or 3 vertical lines spaced at equal distance between engine speeds n_{30} and $1,1$ times n_{95h} for 12 cell grids.
- (3) 2 lines spaced at equal distance of engine torque (i.e. $1/3$) at each vertical line of engine speed defined by subpoints (1) and (2)

All engine speed values in min^{-1} and all torque values in Newtonmeters defining the boundaries of the grid cells shall be rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06.

Figure 6 exemplarily illustrates the definition of the grid cells for the control area in the case of 9 cell grid.

Figure 6

Definition of the grid cells for the control area exemplarily for 9 cell grid

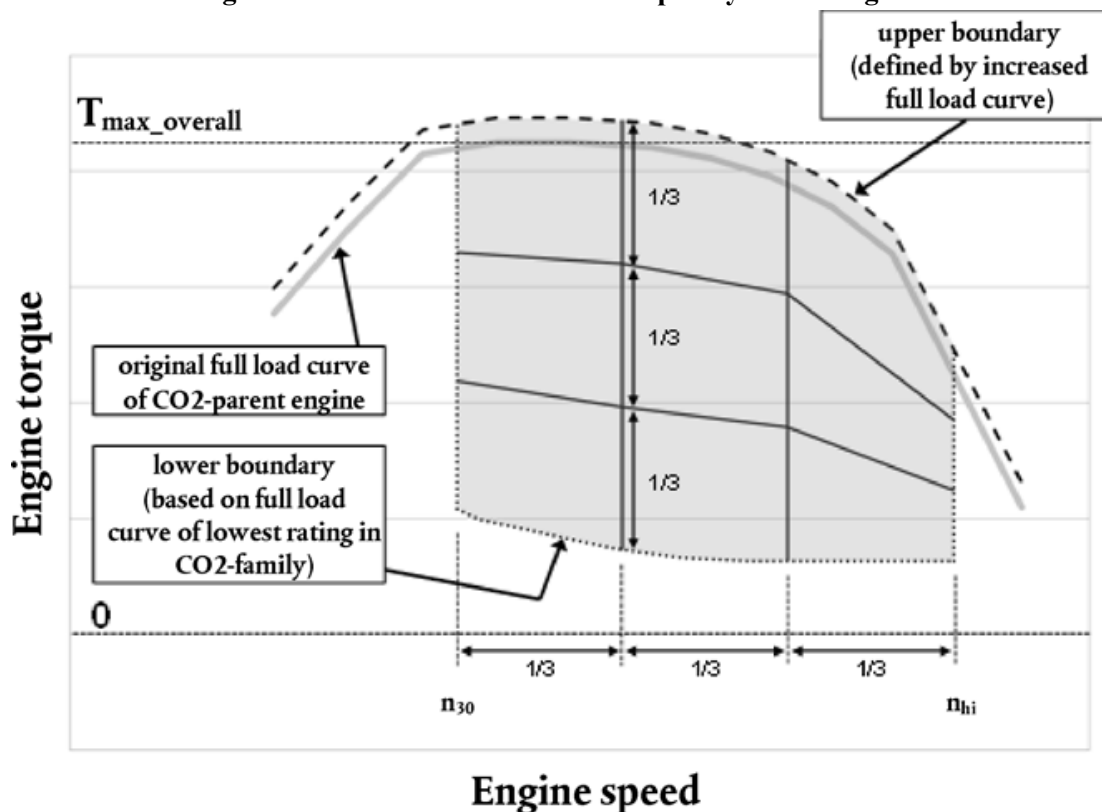

4.3.5.6.3 Calculation of specific mass emissions

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

The specific mass emissions of the gaseous pollutants shall be determined as average value for each grid cell defined in accordance with paragraph 4.3.5.6.2. The average value for each grid cell shall be determined as arithmetical mean value of the specific mass emissions over all engine speed and torque points measured during the FCMC located within the same grid cell.

The specific mass emissions of the single engine speed and torque measured during the FCMC shall be determined as averaged value over the 30 ± 1 seconds measurement period defined in accordance with subpoint (1) of paragraph 4.3.5.5.

If an engine speed and torque point is located directly on a line that separates different grid cells from each other, this engine speed and load point shall be taken into account for the average values of all adjacent grid cells.

The calculation of the total mass emissions of each gaseous pollutant for each engine speed and torque point measured during the FCMC, $m_{\text{FCMC},i}$ in grams, over the 30 ± 1 seconds measurement period in accordance with subpoint (1) of paragraph 4.3.5.5 shall be carried out in accordance with paragraph 8 of Annex 4 to UN/ECE Regulation 49 Rev.06.

The actual engine work for each engine speed and torque point measured during the FCMC, $W_{\text{FCMC},i}$ in kWh, over the 30 ± 1 seconds measurement period in accordance with subpoint (1) of paragraph 4.3.5.5 shall be determined from the engine speed and torque values recorded in accordance with paragraph 4.3.5.3.

The specific mass emissions of gaseous pollutants $e_{\text{FCMC},i}$ in g/kWh for each engine speed and torque point measured during the FCMC shall be determined by the following equation:

$$e_{\text{FCMC},i} = m_{\text{FCMC},i} / W_{\text{FCMC},i}$$

4.3.5.7 Validity of data

4.3.5.7.1 Requirements for validation statistics of the FCMC

A linear regression analysis of the actual values of engine speed (n_{act}), engine torque (M_{act}) and engine power (P_{act}) on the respective reference values (n_{ref} , M_{ref} , P_{ref}) shall be performed for the FCMC. The actual values for n_{act} , M_{act} and P_{act} shall be determined from the values recorded in accordance with paragraph 4.3.5.3.

The ramps to move from one target setpoint to the next shall be excluded from this regression analysis.

To minimize the biasing effect of the time lag between the actual and reference cycle values, the entire engine speed and torque actual signal sequence may be advanced or delayed in time with respect to the reference speed and torque sequence. If the actual signals are shifted, both speed and torque shall be shifted by the same amount in the same direction.

The method of least squares shall be used for the regression analysis in accordance with paragraphs A.3.1 and A.3.2 of Appendix 3 to Annex 4 to UN/ECE Regulation 49 Rev.06, with the best-fit equation having the form as defined in paragraph 7.8.7 of Annex 4 to UN/ECE Regulation 49 Rev.06. It is recommended that this analysis be performed at 1 Hz.

For the purposes of this regression analysis only, omissions of points are permitted where noted in Table 4 (Permitted point omissions from regression analysis) of Annex 4 to UN/ECE Regulation 49 Rev.06 before doing the regression calculation. Additionally, all engine torque and power values at points with maximum operator demand shall be omitted for the purposes of this regression analysis only. However, points omitted for the purposes of regression analysis shall not be omitted for any other calculations in accordance with this Annex. Point omission may be applied to the whole or to any part of the cycle.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

For the data to be considered valid, the criteria of Table 3 (Regression line tolerances for the WHSC) of Annex 4 to UN/ECE Regulation 49 Rev.06 shall be met.

4.3.5.7.2 Requirements for emission monitoring

The data obtained from the FCMC tests is valid if the specific mass emissions of the regulated gaseous pollutants determined for each grid cell in accordance with paragraph 4.3.5.6.3 meet the applicable limits for gaseous pollutants defined in paragraph 5.2.2 of Annex 10 to UN/ECE Regulation 49 Rev.06. In the case that the number of engine speed and torque points within the same grid cell is less than 3, this paragraph shall not apply for that specific grid cell.

5. Post-processing of measurement data

All calculations defined in this paragraph shall be performed specifically for each engine within one engine CO₂-family.

5.1 Calculation of engine work

[^{F1}Total engine work over a cycle or a defined period shall be determined from the recorded values of engine power determined in accordance with paragraph 3.1.2 of this Annex and paragraphs 6.3.5 and 7.4.8 of Annex 4 to UN/ECE Regulation 49 Rev.06.]

The engine work over a complete testcycle or over each WHTC-sub-cycle shall be determined by integrating of recorded values of engine power in accordance with the following formula:

$$W_{act,i} = \left(\frac{1}{2}P_0 + P_1 + P_2 + \dots + P_{n-2} + P_{n-1} + \frac{1}{2}P_n\right)h$$

where:

| | |
|-------------------|--|
| $W_{act,i}$ | = total engine work over the time period from t_0 to t_1 |
| t_0 | = time at the start of the time period |
| t_1 | = time at the end of the time period |
| n | = number of recorded values over the time period from t_0 to t_1 |
| $P_k [0 \dots n]$ | = recorded engine power values over the time period from t_0 to t_1 in chronological order, where k runs from 0 at t_0 to n at t_1 |
| h | = interval width between two adjacent recorded values defined by |
| | $h = \frac{t_1 - t_0}{n}$ |

5.2 Calculation of integrated fuel consumption

Any recorded negative values for the fuel consumption shall be used directly and shall not be set equal to zero for the calculations of the integrated value.

The total fuel mass consumed by the engine over a complete testcycle or over each WHTC-sub-cycle shall be determined by integrating recorded values of fuel massflow in accordance with the following formula:

$$\sum FC_{meas,i} = \left(\frac{1}{2}mf_{fuel,0} + mf_{fuel,1} + mf_{fuel,2} + \dots + mf_{fuel,n-2} + mf_{fuel,n-1} + \frac{1}{2}mf_{fuel,n}\right)h$$

where:

| | |
|---------------------------|---|
| $\sum FC_{meas,i}$ | = total fuel mass consumed by the engine over the time period from t_0 to t_1 |
| t_0 | = time at the start of the time period |
| t_1 | = time at the end of the time period |
| n | = number of recorded values over the time period from t_0 to t_1 |
| $mf_{fuel,k} [0 \dots n]$ | = recorded fuel massflow values over the time period from t_0 to t_1 in chronological order, where k runs from 0 at t_0 to n at t_1 |
| h | = interval width between two adjacent recorded values defined by |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

$$h = \frac{t_1 - t_0}{n}$$

5.3 Calculation of specific fuel consumption figures

The correction and balancing factors, which have to be provided as input for the simulation tool, are calculated by the engine pre-processing tool based on the measured specific fuel consumption figures of the engine determined in accordance with paragraphs 5.3.1 and 5.3.2.

5.3.1 Specific fuel consumption figures for WHTC correction factor

The specific fuel consumption figures needed for the WHTC correction factor shall be calculated from the actual measured values for the hotstart WHTC recorded in accordance with paragraph 4.3.3 as follows:

$$SFC_{meas, Urban} = \Sigma FC_{meas, WHTC-Urban} / W_{act, WHTC-Urban}$$

$$SFC_{meas, Rural} = \Sigma FC_{meas, WHTC-Rural} / W_{act, WHTC-Rural}$$

$$SFC_{meas, MW} = \Sigma FC_{meas, WHTC-MW} / W_{act, WHTC-M}$$

where:

| | |
|-----------------------|--|
| $SFC_{meas, i}$ | = Specific fuel consumption over the WHTC-sub-cycle i [g/kWh] |
| $\Sigma FC_{meas, i}$ | = Total fuel mass consumed by the engine over the WHTC-sub-cycle i [g] determined in accordance with paragraph 5.2 |
| $W_{act, i}$ | = Total engine work over the WHTC sub-cycle i [kWh] determined in accordance with paragraph 5.1 |

The 3 different sub-cycles of the WHTC – urban, rural and motorway – shall be defined as follows:

- (1) urban: from cycle start to ≤ 900 seconds from cycle start
- (2) rural: from > 900 seconds to $\leq 1\,380$ seconds from cycle start
- (3) motorway (MW): from $> 1\,380$ seconds from cycle start to cycle end

5.3.2 Specific fuel consumption figures for cold-hot emission balancing factor

The specific fuel consumption figures needed for the cold-hot emission balancing factor shall be calculated from the actual measured values for both, the hotstart and coldstart WHTC test recorded in accordance with paragraph 4.3.3. The calculations shall be performed for both, the hotstart and coldstart WHTC separately as follows:

$$SFC_{meas, hot} = \Sigma FC_{meas, hot} / W_{act, hot}$$

$$SFC_{meas, cold} = \Sigma FC_{meas, cold} / W_{act, cold}$$

where:

| | |
|-----------------------|--|
| $SFC_{meas, j}$ | = Specific fuel consumption [g/kWh] |
| $\Sigma FC_{meas, j}$ | = Total fuel consumption over the WHTC [g] determined in accordance with paragraph 5.2 of this Annex |
| $W_{act, j}$ | = Total engine work over the WHTC [kWh] determined in accordance with paragraph 5.1 of this Annex |

5.3.3 Specific fuel consumption figures over WHSC

The specific fuel consumption over the WHSC shall be calculated from the actual measured values for the WHSC recorded in accordance with paragraph 4.3.4 as follows:

$$SFC_{WHSC} = (\Sigma FC_{WHSC}) / (W_{WHSC})$$

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

where:

- SFC_{WHSC} = Specific fuel consumption over WHSC [g/kWh]
 ΣFC_{WHSC} = Total fuel consumption over the WHSC [g] determined in accordance with paragraph 5.2 of this Annex
 W_{WHSC} = Total engine work over the WHSC [kWh] determined in accordance with paragraph 5.1 of this Annex

5.3.3.1 Corrected specific fuel consumption figures over WHSC

The calculated specific fuel consumption over the WHSC, SFC_{WHSC} , determined in accordance with paragraph 5.3.3 shall be adjusted to a corrected value, $SFC_{WHSC,corr}$, in order to account for the difference between the NCV of the fuel used during testing and the standard NCV for the respective engine fuel technology in accordance with the following equation:

$$SFC_{WHSC,corr} = SFC_{WHSC} \frac{NCV_{meas}}{NCV_{std}}$$

where:

- $SFC_{WHSC,corr}$ = Corrected specific fuel consumption over WHSC [g/kWh]
 SFC_{WHSC} = Specific fuel consumption over WHSC [g/kWh]
 NCV_{meas} = NCV of the fuel used during testing determined in accordance with paragraph 3.2 [MJ/kg]
 NCV_{std} = Standard NCV in accordance with Table 4 [MJ/kg]

TABLE 4

Standard net calorific values of fuel types

| Fuel type / engine type | Reference fuel type | Standard NCV [MJ/kg] |
|----------------------------------|-----------------------------------|----------------------|
| Diesel / CI | B7 | 42,7 |
| Ethanol / CI | ED95 | 25,7 |
| Petrol / PI | E10 | 41,5 |
| Ethanol / PI | E85 | 29,1 |
| LPG / PI | LPG Fuel B | 46,0 |
| [^{F1} Natural gas / PI | G ₂₅ or G _R | 45,1] |

5.3.3.2 Special provisions for B7 reference fuel

In the case that reference fuel of the type B7 (Diesel /CI) in accordance with paragraph 3.2 was used during testing, the standardization correction in accordance with paragraph 5.3.3.1 shall not be performed and the corrected value, $SFC_{WHSC,corr}$, shall be set to the uncorrected value SFC_{WHSC} .

5.4 Correction factor for engines equipped with exhaust after-treatment systems that are regenerated on a periodic basis

For engines equipped with exhaust after-treatment systems that are regenerated on a periodic basis defined in accordance with paragraph 6.6.1 of Annex 4 to UN/ECE Regulation 49 Rev.06, fuel consumption shall be adjusted to account for regeneration events by a correction factor.

This correction factor, CF_{RegPer} , shall be determined in accordance with paragraph 6.6.2 of Annex 4 to UN/ECE Regulation 49 Rev.06.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

For engines equipped with exhaust after-treatment systems with continuous regeneration, defined in accordance with paragraph 6.6 of Annex 4 to UN/ECE Regulation 49 Rev.06, no correction factor shall be determined and the value of the factor CF_{RegPer} shall be set to 1.

The engine full load curve recorded in accordance with paragraph 4.3.1 shall be used for the denormalization of the WHTC reference cycle and all calculations of reference values performed in accordance with paragraphs 7.4.6, 7.4.7 and 7.4.8 of Annex 4 to UN/ECE Regulation 49 Rev.06.

In addition to the provisions defined in Annex 4 to UN/ECE Regulation 49 Rev.06 the actual fuel mass flow consumed by the engine in accordance with paragraph 3.4 shall be recorded for each WHTC hot start test performed in accordance with paragraph 6.6.2 of Annex 4 to UN/ECE Regulation 49 Rev.06.

The specific fuel consumption for each WHTC hot start test performed shall be calculated by the following equation:

$$SFC_{meas, m} = (\Sigma FC_{meas, m}) / (W_{act, m})$$

where:

| | |
|-----------------------|--|
| $SFC_{meas, m}$ | = Specific fuel consumption [g/kWh] |
| $\Sigma FC_{meas, m}$ | = Total fuel consumption over the WHTC [g] determined in accordance with paragraph 5.2 of this Annex |
| $W_{act, m}$ | = Total engine work over the WHTC [kWh] determined in accordance with paragraph 5.1 of this Annex |
| m | = Index defining each individual WHTC hot start test |

The specific fuel consumption values for the individual WHTC tests shall be weighted by the following equation:

$$SFC_w = \frac{n \times SFC_{avg} + n_r \times SFC_{avg,r}}{n + n_r}$$

where:

| | |
|---------------|--|
| n | = the number of WHTC hot start tests without regeneration |
| n_r | = the number of WHTC hot start tests with regeneration (minimum number is one test) |
| SFC_{avg} | = the average specific fuel consumption from all WHTC hot start tests without regeneration [g/kWh] |
| $SFC_{avg,r}$ | = the average specific fuel consumption from all WHTC hot start tests with regeneration [g/kWh] |

The correction factor, CF_{RegPer} , shall be calculated by the following equation:

$$CF_{RegPer} = \frac{SFC_w}{SFC_{avg}}$$

6. Application of engine pre-processing tool

The engine pre-processing tool shall be executed for each engine within one engine CO₂-family using the input defined in paragraph 6.1.

The output data of the engine pre-processing tool shall be the final result of the engine test procedure and shall be documented.

6.1 Input data for the engine pre-processing tool

The following input data shall be generated by the test procedures specified in this Annex and shall be the input to the engine pre-processing tool.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

6.1.1 Full load curve of the CO₂-parent engine

The input data shall be the engine full load curve of the CO₂-parent engine of the engine CO₂-family defined in accordance with Appendix 3 to this Annex and recorded in accordance with paragraph 4.3.1.

In the case that upon request of the manufacturer the provisions defined in Article 15(5) of this Regulation are applied, the engine full load curve of that specific engine recorded in accordance with paragraph 4.3.1 shall be used as input data.

The input data shall be provided in the file format of 'comma separated values' with the separator character being the Unicode Character 'COMMA' (U+002C) (','). The first line of the file shall be used as a header and not contain any recorded data. The recorded data shall start from the second line of the file.

The first column of the file shall be the engine speed in min⁻¹ rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06. The second column shall be the torque in Nm rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06.

6.1.2 Full load curve

The input data shall be the engine full load curve of the engine recorded in accordance with paragraph 4.3.1.

The input data shall be provided in the file format of 'comma separated values' with the separator character being the Unicode Character 'COMMA' (U+002C) (','). The first line of the file shall be used as a header and not contain any recorded data. The recorded data shall start from the second line of the file.

The first column of the file shall be the engine speed in min⁻¹ rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06. The second column shall be the torque in Nm rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06.

6.1.3 Motoring curve of the CO₂-parent engine

The input data shall be the engine motoring curve of the CO₂-parent engine of the engine CO₂-family defined in accordance with Appendix 3 to this Annex and recorded in accordance with paragraph 4.3.2.

In the case that upon request of the manufacturer the provisions defined in Article 15(5) of this Regulation are applied, the engine motoring curve of that specific engine recorded in accordance with paragraph 4.3.2 shall be used as input data.

The input data shall be provided in the file format of 'comma separated values' with the separator character being the Unicode Character 'COMMA' (U+002C) (','). The first line of the file shall be used as a header and not contain any recorded data. The recorded data shall start from the second line of the file.

The first column of the file shall be the engine speed in min⁻¹ rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06. The second column shall be the torque in Nm rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06.

6.1.4 Fuel consumption map of the CO₂-parent engine

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

The input data shall be the values of engine speed, engine torque and fuel massflow determined for the CO₂-parent engine of the engine CO₂-family defined in accordance with Appendix 3 to this Annex and recorded in accordance with paragraph 4.3.5.

In the case that upon request of the manufacturer the provisions defined in Article 15(5) of this Regulation are applied, the values of engine speed, engine torque and fuel massflow determined for that specific engine recorded in accordance with paragraph 4.3.5 shall be used as input data.

The input data shall only consist of the average measurement values of engine speed, engine torque and fuel massflow over the 30 ± 1 seconds measurement period determined in accordance with subpoint (1) of paragraph 4.3.5.5.

The input data shall be provided in the file format of 'comma separated values' with the separator character being the Unicode Character 'COMMA' (U+002C) (','). The first line of the file shall be used as a header and not contain any recorded data. The recorded data shall start from the second line of the file.

The first column of the file shall be the engine speed in min^{-1} rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06. The second column shall be the torque in Nm rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06. The third column shall be the fuel massflow in g/h rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06.

6.1.5 Specific fuel consumption figures for WHTC correction factor

The input data shall be the three values for specific fuel consumption over the different sub-cycles of the WHTC – urban, rural and motorway – in g/kWh determined in accordance with paragraph 5.3.1.

The values shall be rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06.

6.1.6 Specific fuel consumption figures for cold-hot emission balancing factor

The input data shall be the two values for specific fuel consumption over the hotstart and coldstart WHTC in g/kWh determined in accordance with paragraph 5.3.2.

The values shall be rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06.

6.1.7 Correction factor for engines equipped with exhaust after-treatment systems that are regenerated on a periodic basis

The input data shall be the correction factor CF_{RegPer} determined in accordance with paragraph 5.4.

For engines equipped with exhaust after-treatment systems with continuous regeneration, defined in accordance with paragraph 6.6.1 of Annex 4 to UN/ECERegulation 49 Rev.06, this factor shall be set to 1 in accordance with paragraph 5.4.

The value shall be rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06.

6.1.8 NCV of test fuel

The input data shall be the NCV of the test fuel in MJ/kg determined in accordance with paragraph 3.2.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

[^{F1}The value shall be rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06.]

6.1.9 Type of test fuel

The input data shall be the type of the test fuel selected in accordance with paragraph 3.2.

6.1.10 Engine idle speed of the CO₂-parent engine

The input data shall be the engine idle speed, n_{idle} , in min^{-1} of the CO₂-parent engine of the engine CO₂-family defined in accordance with Appendix 3 to this Annex as declared by the manufacturer in the application for certification in the information document drawn up in accordance with the model set out in Appendix 2.

In the case that upon request of the manufacturer the provisions defined in Article 15(5) of this Regulation are applied, the engine idle speed of that specific engine shall be used as input data.

The value shall be rounded to the nearest whole number in accordance with ASTM E 29-06.

6.1.11 Engine idle speed

The input data shall be the engine idle speed, n_{idle} , in min^{-1} of the engine as declared by the manufacturer in the application for certification in the information document drawn up in accordance with the model set out in Appendix 2 to this Annex.

The value shall be rounded to the nearest whole number in accordance with ASTM E 29-06.

6.1.12 Engine displacement

The input data shall be the displacement in ccm of the engine as declared by the manufacturer at the application for certification in the information document drawn up in accordance with the model set out in Appendix 2 to this Annex.

The value shall be rounded to the nearest whole number in accordance with ASTM E 29-06.

6.1.13 Engine rated speed

The input data shall be the rated speed in min^{-1} of the engine as declared by the manufacturer at the application for certification in point 3.2.1.8. of the information document in accordance with Appendix 2 to this Annex.

The value shall be rounded to the nearest whole number in accordance with ASTM E 29-06.

6.1.14 Engine rated power

The input data shall be the rated power in kW of the engine as declared by the manufacturer at the application for certification in point 3.2.1.8. of the information document in accordance with Appendix 2 to this Annex.

The value shall be rounded to the nearest whole number in accordance with ASTM E 29-06.

6.1.15 Manufacturer

The input data shall be the name of the engine manufacturer as a sequence of characters in ISO8859-1 encoding.

6.1.16 Model

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

The input data shall be the name of the engine model as a sequence of characters in ISO8859-1 encoding.

6.1.17 Technical Report ID

The input data shall be an unique identifier of the technical report compiled for the type approval of the specific engine. This identifier shall be provided as a sequence of characters in ISO8859-1 encoding.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 1

MODEL OF A CERTIFICATE OF A COMPONENT, SEPARATE TECHNICAL UNIT OR SYSTEM

Maximum format: A4 (210 × 297 mm)

CERTIFICATE ON CO₂ EMISSIONS AND FUEL CONSUMPTION RELATED PROPERTIES OF AN ENGINE FAMILY

| | |
|-----------------------------|----------------------|
| Communication concerning: | Administration stamp |
| — granting ⁽¹⁾ | |
| — extension ⁽¹⁾ | |
| — refusal ⁽¹⁾ | |
| — withdrawal ⁽¹⁾ | |

of a certificate on CO₂ emission and fuel consumption related properties of an engine family in accordance with Commission Regulation (EU) 2017/2400.

Commission Regulation (EU) 2017/2400 as last amended by

Certification number:

Hash:

Reason for extension:

SECTION 1.

I

Make (trade name of manufacturer):

0.2. Type:

0.3. Means of identification of type

0.3.1. Location of the certification marking:

0.3.2. Method of affixing certification marking:

0.5. Name and address of manufacturer:

0.6. Name(s) and address(es) of assembly plant(s):

0.7. Name and address of the manufacturer's representative (if any)

SECTION 2.

II

Additional information (where applicable): see Addendum

2. Approval authority responsible for carrying out the tests:

3. Date of test report:

4. Number of test report:

5. Remarks (if any): see Addendum

6. Place:

7. Date:

8. Signature:

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Attachments:

Information package. Test report.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 2

Engine Information Document

Notes regarding filling in the tables:

Letters A, B, C, D, E corresponding to engine CO₂-family members shall be replaced by the actual engine CO₂-family members' names.

In case when for a certain engine characteristic same value/description applies for all engine CO₂-family members the cells corresponding to A-E shall be merged.

In case the engine CO₂-family consists of more than 5 members, new columns may be added.

The 'Appendix to information document' shall be copied and filled in for each engine within an CO₂-family separately.

Explanatory footnotes can be found at the very end of this Appendix.

| | CO ₂ -parent engine | Engine CO ₂ -family members | | | | |
|--------|--|--|---|---|---|---|
| | | A | B | C | D | E |
| 0. | General | | | | | |
| 0.1. | Make (trade name of manufacturer) | | | | | |
| 0.2. | Type | | | | | |
| 0.2.1. | Commercial name(s) (if available) | | | | | |
| 0.5. | Name and address of manufacturer | | | | | |
| 0.8. | Name(s) and address (es) of assembly plant(s) | | | | | |
| 0.9. | Name and address of the manufacturer's representative (if any) | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

PART 1

Essential characteristics of the (parent) engine and the engine types within an engine family

| | | Parent engine or engine type | Engine CO ₂ -family members | | | | |
|-----------|---|------------------------------|--|---|---|---|---|
| | | | A | B | C | D | E |
| 3.2. | Internal combustion engine | | | | | | |
| 3.2.1. | Specific engine information | | | | | | |
| 3.2.1.1. | Working principle: positive ignition/compression ignition ⁽¹⁾ Cycle four stroke/two stroke/rotary ⁽¹⁾ | | | | | | |
| 3.2.1.2. | Number and arrangement of cylinders | | | | | | |
| 3.2.1.2.1 | Bore ⁽³⁾ mm | | | | | | |
| 3.2.1.2.2 | Stroke ⁽³⁾ mm | | | | | | |
| 3.2.1.2.3 | Firing order | | | | | | |
| 3.2.1.3. | Engine capacity ⁽⁴⁾ cm ³ | | | | | | |
| 3.2.1.4. | Volumetric compression ratio ⁽⁵⁾ | | | | | | |
| 3.2.1.5. | Drawings of combustion chamber, piston crown and, in the case of positive ignition engines, piston rings | | | | | | |
| 3.2.1.6. | Normal engine idling speed ⁽⁵⁾ min ⁻¹ | | | | | | |
| 3.2.1.6.1 | High engine idling speed ⁽⁵⁾ min ⁻¹ | | | | | | |
| 3.2.1.7. | Carbon monoxide content by volume in the exhaust gas with the engine idling ⁽⁵⁾ : % as stated by the manufacturer (positive ignition engines only) | | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | |
|-------------------------|--|--|--|--|---|
| 3.2.1.8. | Maximum net power ⁽⁶⁾ ... kW at ... min⁻¹ (manufacturer's declared value) | | | | |
| 3.2.1.9. | Maximum permitted engine speed as prescribed by the manufacturer (min⁻¹) | | | | |
| 3.2.1.10. | Maximum net torque ⁽⁶⁾ (Nm) at (min⁻¹) (manufacturer's declared value) | | | | |
| 3.2.1.11. | Manufacturer references of the documentation package required by paragraphs 3.1., 3.2. and 3.3. of UN/ECE Regulation 49 Rev. 06 enabling the Type Approval Authority to evaluate the emission control strategies and the systems on-board the engine to ensure the correct operation of NO_x control measures | | | | |
| 3.2.2. | Fuel | | | | |
| [^{F1} 3.2.2.] | Heavy duty vehicles Diesel/Petrol/LPG/NG/Ethanol (ED95)/Ethanol (E85) ⁽¹⁾ | | | | I |
| 3.2.2.2.1 | Fuels compatible with use by the engine declared by the manufacturer in accordance with paragraph 4.6.2. of UN/ECE Regulation 49 Rev. 06 (as applicable) | | | | |
| 3.2.4. | Fuel feed | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | | |
|------------------|--|--|--|--|--|--|--|
| 3.2.4.2. | By fuel injection (compression ignition only): Yes/ No ⁽¹⁾ | | | | | | |
| 3.2.4.2.1 | System description | | | | | | |
| 3.2.4.2.2 | Working principle: direct injection/ pre-chamber/swirl chamber ⁽¹⁾ | | | | | | |
| 3.2.4.2.3 | Injection pump | | | | | | |
| 3.2.4.2.3 | Make(s) | | | | | | |
| 3.2.4.2.3 | Type(s) | | | | | | |
| 3.2.4.2.3 | Maximum fuel delivery ⁽¹⁾ ⁽⁵⁾ ... mm³ /stroke or cycle at an engine speed of ... min⁻¹ or, alternatively, a characteristic diagram(When boost control is supplied, state the characteristic fuel delivery and boost pressure versus engine speed) | | | | | | |
| 3.2.4.2.3 | Static injection timing ⁽⁵⁾ | | | | | | |
| 3.2.4.2.3 | Injection advance curve ⁽⁵⁾ | | | | | | |
| 3.2.4.2.3 | Calibration procedure: test bench/engine ⁽¹⁾ | | | | | | |
| 3.2.4.2.4 | Governor | | | | | | |
| 3.2.4.2.4 | Type | | | | | | |
| 3.2.4.2.4 | Cut-off point | | | | | | |
| 3.2.4.2.4 | Speed at which cut-off starts under load (min⁻¹) | | | | | | |
| 3.2.4.2.4 | Maximum no-load speed (min⁻¹) | | | | | | |
| 3.2.4.2.4 | Idle speed (min⁻¹) | | | | | | |
| 3.2.4.2.5 | Injection piping | | | | | | |
| 3.2.4.2.5 | Length (mm) | | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | | |
|-----------|---|--|--|--|--|--|--|
| 3.2.4.2.5 | Internal diameter (mm) | | | | | | |
| 3.2.4.2.5 | Common rail, make and type | | | | | | |
| 3.2.4.2.6 | Injector(s) | | | | | | |
| 3.2.4.2.6 | Make(s) | | | | | | |
| 3.2.4.2.6 | Type(s) | | | | | | |
| 3.2.4.2.6 | Opening pressure characteristic (̂): diagram (̂) | | | | | | |
| 3.2.4.2.7 | Cold start system | | | | | | |
| 3.2.4.2.7 | Make(s) | | | | | | |
| 3.2.4.2.7 | Type(s) | | | | | | |
| 3.2.4.2.7 | Description | | | | | | |
| 3.2.4.2.8 | Auxiliary starting aid | | | | | | |
| 3.2.4.2.8 | Make(s) | | | | | | |
| 3.2.4.2.8 | Type(s) | | | | | | |
| 3.2.4.2.8 | System description | | | | | | |
| 3.2.4.2.9 | Electronic controlled injection: Yes/No (¹) | | | | | | |
| 3.2.4.2.9 | Make(s) | | | | | | |
| 3.2.4.2.9 | Type(s) | | | | | | |
| 3.2.4.2.9 | Description of the system (in the case of systems other than continuous injection give equivalent details) | | | | | | |
| 3.2.4.2.9 | Make and type of the control unit (ECU) | | | | | | |
| 3.2.4.2.9 | Make and type of the fuel regulator | | | | | | |
| 3.2.4.2.9 | Make and type of the air-flow sensor | | | | | | |
| 3.2.4.2.9 | Make and type of fuel distributor | | | | | | |
| 3.2.4.2.9 | Make and type of the throttle housing | | | | | | |
| 3.2.4.2.9 | Make and type of water temperature sensor | | | | | | |
| 3.2.4.2.9 | Make and type of air temperature sensor | | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | |
|-----------|--|--|--|--|--|--|
| 3.2.4.2.9 | Make and type of air pressure sensor | | | | | |
| 3.2.4.2.9 | Software calibration number(s) | | | | | |
| 3.2.4.3. | By fuel injection (positive ignition only): Yes/No (¹) | | | | | |
| 3.2.4.3.1 | Working principle: intake manifold (single-/multi-point/direct injection (¹)/other specify) | | | | | |
| 3.2.4.3.2 | Make(s) | | | | | |
| 3.2.4.3.3 | Type(s) | | | | | |
| 3.2.4.3.4 | System description (In the case of systems other than continuous injection give equivalent details) | | | | | |
| 3.2.4.3.4 | Make and type of the control unit (ECU) | | | | | |
| 3.2.4.3.4 | Make and type of fuel regulator | | | | | |
| 3.2.4.3.4 | Make and type of air-flow sensor | | | | | |
| 3.2.4.3.4 | Make and type of fuel distributor | | | | | |
| 3.2.4.3.4 | Make and type of pressure regulator | | | | | |
| 3.2.4.3.4 | Make and type of micro switch | | | | | |
| 3.2.4.3.4 | Make and type of idling adjustment screw | | | | | |
| 3.2.4.3.4 | Make and type of throttle housing | | | | | |
| 3.2.4.3.4 | Make and type of water temperature sensor | | | | | |
| 3.2.4.3.4 | Make and type of air temperature sensor | | | | | |
| 3.2.4.3.4 | Make and type of air pressure sensor | | | | | |
| 3.2.4.3.4 | Software calibration number(s) | | | | | |
| 3.2.4.3.5 | Injectors: opening pressure (⁵) (kPa) | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | |
|------------------|---|--|--|--|--|--|
| | or characteristic diagram (5) | | | | | |
| 3.2.4.3.5 | Make | | | | | |
| 3.2.4.3.5 | Type | | | | | |
| 3.2.4.3.6 | Injection timing | | | | | |
| 3.2.4.3.7 | Cold start system | | | | | |
| 3.2.4.3.7 | Operating principle(s) | | | | | |
| 3.2.4.3.7 | Operating limits/ settings (1) (5) | | | | | |
| 3.2.4.4. | Feed pump | | | | | |
| 3.2.4.4.1 | Pressure (5) (kPa) or characteristic diagram (5) | | | | | |
| 3.2.5. | Electrical system | | | | | |
| 3.2.5.1. | Rated voltage (V), positive/negative ground (1) | | | | | |
| 3.2.5.2. | Generator | | | | | |
| 3.2.5.2.1 | Type | | | | | |
| 3.2.5.2.2 | Nominal output (VA) | | | | | |
| 3.2.6. | Ignition system (spark ignition engines only) | | | | | |
| 3.2.6.1. | Make(s) | | | | | |
| 3.2.6.2. | Type(s) | | | | | |
| 3.2.6.3. | Working principle | | | | | |
| 3.2.6.4. | Ignition advance curve or map (5) | | | | | |
| 3.2.6.5. | Static ignition timing (5) (degrees before TDC) | | | | | |
| 3.2.6.6. | Spark plugs | | | | | |
| 3.2.6.6.1 | Make | | | | | |
| 3.2.6.6.2 | Type | | | | | |
| 3.2.6.6.3 | Gap setting (mm) | | | | | |
| 3.2.6.7. | Ignition coil(s) | | | | | |
| 3.2.6.7.1 | Make | | | | | |
| 3.2.6.7.2 | Type | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | | |
|--------------------|--|--|--|--|--|--|--|
| 3.2.7. | Cooling system: liquid/air ⁽¹⁾ | | | | | | |
| 3.2.7.2. | Liquid | | | | | | |
| 3.2.7.2.1 | Nature of liquid | | | | | | |
| 3.2.7.2.2 | Circulating pump(s): Yes/No ⁽¹⁾ | | | | | | |
| 3.2.7.2.3 | Characteristics | | | | | | |
| 3.2.7.2.3.1 | Make(s) | | | | | | |
| 3.2.7.2.3.2 | Type(s) | | | | | | |
| 3.2.7.2.4 | Drive ratio(s) | | | | | | |
| 3.2.7.3. | Air | | | | | | |
| 3.2.7.3.1 | Fan: Yes/No ⁽¹⁾ | | | | | | |
| 3.2.7.3.2 | Characteristics | | | | | | |
| 3.2.7.3.2.1 | Make(s) | | | | | | |
| 3.2.7.3.2.2 | Type(s) | | | | | | |
| 3.2.7.3.3 | Drive ratio(s) | | | | | | |
| 3.2.8. | Intake system | | | | | | |
| 3.2.8.1. | Pressure charger: Yes/No ⁽¹⁾ | | | | | | |
| 3.2.8.1.1 | Make(s) | | | | | | |
| 3.2.8.1.2 | Type(s) | | | | | | |
| 3.2.8.1.3 | Description of the system (e.g. maximum charge pressure ... kPa, wastegate, if applicable) | | | | | | |
| 3.2.8.2. | Intercooler: Yes/No ⁽¹⁾ | | | | | | |
| 3.2.8.2.1 | Type: air-air/air- water ⁽¹⁾ | | | | | | |
| 3.2.8.3. | Intake depression at rated engine speed and at 100 % load (compression ignition engines only) | | | | | | |
| 3.2.8.3.1 | Minimum allowable (kPa) | | | | | | |
| 3.2.8.3.2 | Maximum allowable (kPa) | | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | | |
|-----------|--|--|--|--|--|--|--|
| 3.2.8.4. | Description and drawings of inlet pipes and their accessories (plenum chamber, heating device, additional air intakes, etc.) | | | | | | |
| 3.2.8.4.1 | Intake manifold description (include drawings and/or photos) | | | | | | |
| 3.2.9. | Exhaust system | | | | | | |
| 3.2.9.1. | Description and/or drawings of the exhaust manifold | | | | | | |
| 3.2.9.2. | Description and/or drawing of the exhaust system | | | | | | |
| 3.2.9.2.1 | Description and/or drawing of the elements of the exhaust system that are part of the engine system | | | | | | |
| 3.2.9.3. | Maximum allowable exhaust back pressure at rated engine speed and at 100 % load (compression ignition engines only)(kPa) (⁷) | | | | | | |
| 3.2.9.7. | Exhaust system volume (dm³) | | | | | | |
| 3.2.9.7.1 | Acceptable Exhaust system volume: (dm³) | | | | | | |
| 3.2.10. | Minimum cross-sectional areas of inlet and outlet ports and port geometry | | | | | | |
| 3.2.11. | Valve timing or equivalent data | | | | | | |
| 3.2.11.1. | Maximum lift of valves, angles of opening and closing, or timing details of alternative distribution systems, in relation to dead | | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | | |
|------------------|--|--|--|--|--|--|--|
| | centers. For variable timing system, minimum and maximum timing | | | | | | |
| 3.2.11.2. | Reference and/or setting range ⁽⁷⁾ | | | | | | |
| 3.2.12. | Measures taken against air pollution | | | | | | |
| 3.2.12.1. | Device for recycling crankcase gases: Yes/No ⁽¹⁾If yes, description and drawingsIf no, compliance with paragraph 6.10. of Annex 4 of UN/ECE Regulation 49 Rev. 06 required | | | | | | |
| 3.2.12.2. | Additional pollution control devices (if any, and if not covered by another heading) | | | | | | |
| 3.2.12.2. | Catalytic converter: Yes/No ⁽¹⁾ | | | | | | |
| 3.2.12.2. | Number of catalytic converters and elements (provide this information below for each separate unit) | | | | | | |
| 3.2.12.2. | Dimensions, shape and volume of the catalytic converter(s) | | | | | | |
| 3.2.12.2. | Type of catalytic action | | | | | | |
| 3.2.12.2. | Total charge of precious metals | | | | | | |
| 3.2.12.2. | Relative concentration | | | | | | |
| 3.2.12.2. | Substrate (structure and material) | | | | | | |
| 3.2.12.2. | Cell density | | | | | | |
| 3.2.12.2. | Type of casing for the catalytic converter(s) | | | | | | |
| 3.2.12.2. | Location of the catalytic converter(s) (place and reference | | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | | |
|-----------|---|--|--|--|--|--|--|
| | distance in the exhaust line) | | | | | | |
| 3.2.12.2. | Hot shield: Yes/No (1) | | | | | | |
| 3.2.12.2. | Regeneration systems/method of exhaust after treatment systems, description | | | | | | |
| 3.2.12.2. | Normal operating temperature range (K) | | | | | | |
| 3.2.12.2. | Consumable reagents: Yes/No (1) | | | | | | |
| 3.2.12.2. | Type and concentration of reagent needed for catalytic action | | | | | | |
| 3.2.12.2. | Normal operational temperature range of reagent K | | | | | | |
| 3.2.12.2. | International standard | | | | | | |
| 3.2.12.2. | Frequency of reagent refill: continuous/maintenance (1) | | | | | | |
| 3.2.12.2. | Make of catalytic converter | | | | | | |
| 3.2.12.2. | Identifying part number | | | | | | |
| 3.2.12.2. | Oxygen sensor: Yes/No (1) | | | | | | |
| 3.2.12.2. | Make | | | | | | |
| 3.2.12.2. | Location | | | | | | |
| 3.2.12.2. | Control range | | | | | | |
| 3.2.12.2. | Type | | | | | | |
| 3.2.12.2. | Identifying part number | | | | | | |
| 3.2.12.2. | Air injection: Yes/No (1) | | | | | | |
| 3.2.12.2. | Type (pulse air, air pump, etc.) | | | | | | |
| 3.2.12.2. | Exhaust gas recirculation (EGR): Yes/No (1) | | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | | |
|-----------|--|--------------------------|--|--|--|--|--|
| 3.2.12.2. | C haracteristics (make, type, flow, etc) | | | | | | |
| 3.2.12.2. | P articulate trap (PT): Yes/No (¹) | | | | | | |
| 3.2.12.2. | D imensions, shape and capacity of the particulate trap | | | | | | |
| 3.2.12.2. | D esign of the particulate trap | | | | | | |
| 3.2.12.2. | L ocation (reference distance in the exhaust line) | | | | | | |
| 3.2.12.2. | M ethod or system of regeneration, description and/or drawing | | | | | | |
| 3.2.12.2. | M ake of particulate trap | | | | | | |
| 3.2.12.2. | I dentifying part number | | | | | | |
| 3.2.12.2. | N ormal operating temperature (K) and pressure (kPa) ranges | | | | | | |
| 3.2.12.2. | I n the case of periodic regeneration | | | | | | |
| 3.2.12.2. | N umber of WHTC test cycles without regeneration (n) | | | | | | |
| 3.2.12.2. | N umber of WHTC test cycles with regeneration (n _R) | | | | | | |
| 3.2.12.2. | O ther systems: Yes/No (¹) | | | | | | |
| 3.2.12.2. | D escription and operation | | | | | | |
| 3.2.12.2. | O n-board-diagnostic (OBD) system | | | | | | |
| 3.2.12.2. | N umber of OBD engine families within the engine family | | | | | | |
| 3.2.12.2. | L ist of the OBD engine families (when applicable) | OBD engine family 1: ... | | | | | |
| | | OBD engine family 2: ... | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | etc ... | | | | | |
|-----------|---|---------|--|--|--|--|--|
| 3.2.12.2. | Number of the OBD engine family the parent engine / the engine member belongs to | | | | | | |
| 3.2.12.2. | Manufacturer references of the OBD-Documentation required by paragraph 3.1.4. (c) and paragraph 3.3.4. of UN/ECE Regulation 49 Rev. 06 and specified in Annex 9A of UN/ECE Regulation 49 Rev. 06 for the purpose of approving the OBD system | | | | | | |
| 3.2.12.2. | When appropriate, manufacturer reference of the Documentation for installing in a vehicle an OBD equipped engine system | | | | | | |
| 3.2.12.2. | List and purpose of all components monitored by the OBD system ⁽⁸⁾ | | | | | | |
| 3.2.12.2. | Written description (general working principles) for | | | | | | |
| 3.2.12.2. | Positive-ignition engines ⁽⁸⁾ | | | | | | |
| 3.2.12.2. | Catalyst monitoring ⁽⁸⁾ | | | | | | |
| 3.2.12.2. | Misfire detection ⁽⁸⁾ | | | | | | |
| 3.2.12.2. | Oxygen sensor monitoring ⁽⁸⁾ | | | | | | |
| 3.2.12.2. | Other components monitored by the OBD system | | | | | | |
| 3.2.12.2. | Compression-ignition engines ⁽⁸⁾ | | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | | |
|-------------|--|--|--|--|--|--|--|
| 3.2.12.2.1 | Catalyst monitoring (⁸) | | | | | | |
| 3.2.12.2.2 | Particulate trap monitoring (⁸) | | | | | | |
| 3.2.12.2.3 | Electronic fuelling system monitoring (⁸) | | | | | | |
| 3.2.12.2.4 | NO_x system monitoring (⁸) | | | | | | |
| 3.2.12.2.5 | Other components monitored by the OBD system (⁸) | | | | | | |
| 3.2.12.2.6 | Criteria for MI activation (fixed number of driving cycles or statistical method) (⁸) | | | | | | |
| 3.2.12.2.7 | List of all OBD output codes and formats used (with explanation of each) (⁸) | | | | | | |
| 3.2.12.2.8 | OBD Communication protocol standard (⁸) | | | | | | |
| 3.2.12.2.9 | Manufacturer reference of the OBD related information required by of paragraphs 3.1.4. (d) and 3.3.4. of UN/ECE Regulation 49 Rev. 06 for the purpose of complying with the provisions on access to vehicle OBD, or | | | | | | |
| 3.2.12.2.10 | As an alternative to a manufacturer reference provided in paragraph 3.2.12.2.7.7. reference of the attachment to this annex that contains the following table, once completed according | | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | |
|--------------------------|---|--|--|--|--|
| | <p>to the given example:Component - Fault code - Monitoring strategy - Fault detection criteria - MI activation criteria - Secondary parameters – Preconditioning - Demonstration testSCR Catalyst - P20EE - NO_x sensor 1 and 2 signals - Difference between sensor 1 and sensor 2 signals - 2nd cycle - Engine speed, engine load, catalyst temperature, reagent activity, exhaust mass flow - One OBD test cycle (WHTC, hot part) - OBD test cycle (WHTC, hot part)</p> | | | | |
| <p>3.2.12.2.8</p> | <p>Other system (description and operation)</p> | | | | |
| <p>3.2.12.2.8</p> | <p>Systems to ensure the correct operation of NO_x control measures</p> | | | | |
| <p>3.2.12.2.8</p> | <p>Engine with permanent deactivation of the driver inducement, for use by the rescue services or in vehicles designed and constructed for use by the armed services, civil defence, fire services and forces responsible for maintaining public order: Yes/No ⁽¹⁾</p> | | | | |
| <p>3.2.12.2.8</p> | <p>Number of OBD engine families within the engine family considered</p> | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | | |
|------------|---|---|--|--|--|--|--|
| | when ensuring the correct operation of NO_x control measures | | | | | | |
| 3.2.12.2.1 | List of the OBD engine families (when applicable) | OBD engine family 1: ... OBD engine family 2: ... etc ... | | | | | |
| 3.2.12.2.2 | Number of the OBD engine family the parent engine / the engine member belongs to | | | | | | |
| 3.2.12.2.3 | Lowest concentration of the active ingredient present in the reagent that does not activate the warning system (CD_{min}) (% vol) | | | | | | |
| 3.2.12.2.4 | When appropriate, manufacturer reference of the Documentation for installing in a vehicle the systems to ensure the correct operation of NO_x control measures | | | | | | |
| 3.2.17. | Specific information related to gas fuelled engines for heavy-duty vehicles (in the case of systems laid out in a different manner, supply equivalent information) | | | | | | |
| 3.2.17.1 | Fuel: LPG /NG-H/ NG-L /NG-HL ⁽¹⁾ | | | | | | |
| 3.2.17.2 | Pressure regulator(s) or vaporiser/ pressure regulator(s) ⁽¹⁾ | | | | | | |
| 3.2.17.2 | Make(s) | | | | | | |
| 3.2.17.2 | Type(s) | | | | | | |
| 3.2.17.2 | Number of pressure reduction stages | | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | |
|-----------|--|--|--|--|--|--|
| 3.2.17.2. | Pressure in final stage minimum (kPa) – maximum. (kPa) | | | | | |
| 3.2.17.2. | Number of main adjustment points | | | | | |
| 3.2.17.2. | Number of idle adjustment points | | | | | |
| 3.2.17.2. | Type approval number | | | | | |
| 3.2.17.3. | Fuelling system: mixing unit / gas injection / liquid injection / direct injection ⁽¹⁾ | | | | | |
| 3.2.17.3. | Mixture strength regulation | | | | | |
| 3.2.17.3. | System description and/or diagram and drawings | | | | | |
| 3.2.17.3. | Type approval number | | | | | |
| 3.2.17.4. | Mixing unit | | | | | |
| 3.2.17.4. | Number | | | | | |
| 3.2.17.4. | Make(s) | | | | | |
| 3.2.17.4. | Type(s) | | | | | |
| 3.2.17.4. | Location | | | | | |
| 3.2.17.4. | Adjustment possibilities | | | | | |
| 3.2.17.4. | Type approval number | | | | | |
| 3.2.17.5. | Inlet manifold injection | | | | | |
| 3.2.17.5. | Injection: single point/multipoint ⁽¹⁾ | | | | | |
| 3.2.17.5. | Injection: continuous/ simultaneously timed/sequentially timed ⁽¹⁾ | | | | | |
| 3.2.17.5. | Injection equipment | | | | | |
| 3.2.17.5. | Make(s) | | | | | |
| 3.2.17.5. | Type(s) | | | | | |
| 3.2.17.5. | Adjustment possibilities | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | |
|-------------|---|--|--|--|--|--|
| 3.2.17.5.3 | Type approval number | | | | | |
| 3.2.17.5.4 | Supply pump (if applicable) | | | | | |
| 3.2.17.5.5 | Make(s) | | | | | |
| 3.2.17.5.6 | Type(s) | | | | | |
| 3.2.17.5.7 | Type approval number | | | | | |
| 3.2.17.5.8 | Injector(s) | | | | | |
| 3.2.17.5.9 | Make(s) | | | | | |
| 3.2.17.5.10 | Type(s) | | | | | |
| 3.2.17.5.11 | Type approval number | | | | | |
| 3.2.17.6.1 | Direct injection | | | | | |
| 3.2.17.6.2 | Injection pump/ pressure regulator (¹) | | | | | |
| 3.2.17.6.3 | Make(s) | | | | | |
| 3.2.17.6.4 | Type(s) | | | | | |
| 3.2.17.6.5 | Injection timing | | | | | |
| 3.2.17.6.6 | Type approval number | | | | | |
| 3.2.17.6.7 | Injector(s) | | | | | |
| 3.2.17.6.8 | Make(s) | | | | | |
| 3.2.17.6.9 | Type(s) | | | | | |
| 3.2.17.6.10 | Opening pressure or characteristic diagram (¹) | | | | | |
| 3.2.17.6.11 | Type approval number | | | | | |
| 3.2.17.7.1 | Electronic control unit (ECU) | | | | | |
| 3.2.17.7.2 | Make(s) | | | | | |
| 3.2.17.7.3 | Type(s) | | | | | |
| 3.2.17.7.4 | Adjustment possibilities | | | | | |
| 3.2.17.7.5 | Software calibration number(s) | | | | | |
| 3.2.17.8.1 | NG fuel-specific equipment | | | | | |
| 3.2.17.8.2 | Variant 1 (only in the case of approvals of engines for | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | several specific fuel compositions) | | | | | | |
|---------------------|---|--|--|--|--|--|--|
| 3.2.17.8.1 | Adaptive feature? Yes/No (1) | | | | | | |
| [F3] | | | | | | | |
| 3.2.17.8.1.1 | methane (CH ₄) ... basis (%mole) ethane (C ₂ H ₆) ... basis (%mole) propane (C ₃ H ₈) ... basis (%mole) butane (C ₄ H ₁₀) ... basis (%mole) C ₅ /C ₅₊ : ... basis (%mole) oxygen (O ₂) ... basis (%mole) inert (N ₂ , He etc) ... basis (%mole) | min (%mole) min (%mole) min (%mole) min (%mole) min (%mole) min (%mole) | max (%mole) max (%mole) max (%mole) max (%mole) max (%mole) max (%mole) | | | | |
| 3.5.5. | Specific fuel consumption and correction factors | | | | | | |
| 3.5.5.1. | Specific fuel consumption over WHSC 'SFC_{WHSC}' in accordance with paragraph 5.3.3 g/kWh | | | | | | |
| 3.5.5.2. | Corrected specific fuel consumption over WHSC 'SFC_{WHSC, corr}' in accordance with paragraph 5.3.3.1: ... g/kWh | | | | | | |
| 3.5.5.3. | Correction factor for WHTC urban part (from output of engine pre-processing tool) | | | | | | |
| 3.5.5.4. | Correction factor for WHTC rural part (from output of engine pre-processing tool) | | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | | |
|-----------|--|--|--|--|--|--|--|
| 3.5.5.5. | Correction factor for WHTC motorway part (from output of engine pre-processing tool) | | | | | | |
| 3.5.5.6. | Cold-hot emission balancing factor (from output of engine pre-processing tool) | | | | | | |
| 3.5.5.7. | Correction factor for engines equipped with exhaust after-treatment systems that are regenerated on a periodic basis CF_{RegPer} (from output of engine pre-processing tool) | | | | | | |
| 3.5.5.8. | Correction factor to standard NCV (from output of engine pre-processing tool) | | | | | | |
| 3.6. | Temperatures permitted by the manufacturer | | | | | | |
| 3.6.1. | Cooling system | | | | | | |
| 3.6.1.1. | Liquid cooling Maximum temperature at outlet (K) | | | | | | |
| 3.6.1.2. | Air cooling | | | | | | |
| 3.6.1.2.1 | Reference point | | | | | | |
| 3.6.1.2.2 | Maximum temperature at reference point (K) | | | | | | |
| 3.6.2. | Maximum outlet temperature of the inlet intercooler (K) | | | | | | |
| 3.6.3. | Maximum exhaust temperature at the point in the exhaust pipe(s) adjacent to the outer flange(s) of the exhaust manifold(s) or turbocharger(s) (K) | | | | | | |
| 3.6.4. | Fuel temperature Minimum (K) – | | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | | |
|------------------|---|--|--|--|--|--|--|
| | maximum (K)For diesel engines at injection pump inlet, for gas fuelled engines at pressure regulator final stage | | | | | | |
| 3.6.5. | Lubricant temperatureMinimum (K) – maximum (K) | | | | | | |
| 3.8. | Lubrication system | | | | | | |
| 3.8.1. | Description of the system | | | | | | |
| 3.8.1.1. | Position of lubricant reservoir | | | | | | |
| 3.8.1.2. | Feed system (by pump/injection into intake/mixing with fuel, etc.) ⁽¹⁾ | | | | | | |
| 3.8.2. | Lubricating pump | | | | | | |
| 3.8.2.1. | Make(s) | | | | | | |
| 3.8.2.2. | Type(s) | | | | | | |
| 3.8.3. | Mixture with fuel | | | | | | |
| 3.8.3.1. | Percentage | | | | | | |
| 3.8.4. | Oil cooler: Yes/No ⁽¹⁾ | | | | | | |
| 3.8.4.1. | Drawing(s) | | | | | | |
| 3.8.4.1.1 | Make(s) | | | | | | |
| 3.8.4.1.2 | Type(s) | | | | | | |

Notes:

- ⁽¹⁾ Delete where not applicable (there are cases where nothing needs to be deleted when more than one entry is applicable).
- ⁽²⁾ This figure shall be rounded off to the nearest tenth of a millimetre.
- ⁽⁴⁾ This value shall be calculated and rounded off to the nearest cm³.
- ⁽⁵⁾ Specify the tolerance.
- ⁽⁶⁾ Determined in accordance with the requirements of Regulation No. 85.
- ⁽⁷⁾ Please fill in here the upper and lower values for each variant.
- ⁽⁸⁾ To be documented in case of a single OBD engine family and if not already documented in the documentation package(s) referred to in line 3.2.12.2.7.0.4. of Part 1 of this Appendix.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix to information document

Information on test conditions

1. Spark plugs
 - 1.1. Make
 - 1.2. Type
 - 1.3. Spark-gap setting
2. Ignition coil
 - 2.1. Make
 - 2.2. Type
3. Lubricant used
 - 3.1. Make
 - 3.2. Type (state percentage of oil in mixture if lubricant and fuel mixed)
 - 3.3. Specifications of lubricant
4. Test fuel used
 - 4.1. Fuel type (in accordance with paragraph 6.1.9 of Annex V to Commission Regulation (EU) 2017/2400)
 - 4.2. Unique identification number (production batch number) of fuel used
 - 4.3. Net calorific value (NCV) (in accordance with paragraph 6.1.8 of Annex V to Commission Regulation (EU) 2017/2400)
 - [^{F2}4.4. Reference fuel type (type of reference fuel used for testing in accordance with point 3.2 of Annex V to Commission Regulation (EU) 2017/2400)]
5. Engine-driven equipment
 - 5.1. The power absorbed by the auxiliaries/equipment needs only be determined,
 - (a) If auxiliaries/equipment required are not fitted to the engine and/or
 - (b) If auxiliaries/equipment not required are fitted to the engine.

Note: Requirements for engine-driven equipment differ between emissions test and power test
- 5.2. Enumeration and identifying details
- 5.3. Power absorbed at engine speeds specific for emissions test

TABLE 1

Power absorbed at engine speeds specific for emissions test

| Equipment | | | | | |
|----------------|------|-----------|------------|----------------------------------|------------------|
| | Idle | Low speed | High speed | Preferred speed (²) | n _{95h} |
| P _a | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | |
|--|--|--|--|--|--|
| Auxiliaries/ equipment required according to Annex 4, Appendix 6 of UN/ECE Regulation 49 Rev. 06 | | | | | |
| P _b Auxiliaries/ equipment not required according to Annex 4, Appendix 6 of UN/ECE Regulation 49 Rev. 06 | | | | | |

5.4. Fan constant determined in accordance with Appendix 5 to this Annex (if applicable)

5.4.1. C_{avg-fan} (if applicable)

5.4.2. C_{ind-fan} (if applicable)

TABLE 2

Value of fan constant C_{ind-fan} for different engine speeds

| Value | Engine speed | Engine speed | Engine speed | Engine speed | Engine speed | Engine speed | Engine speed | Engine speed | Engine speed | Engine speed |
|--|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| engine speed [min ⁻¹] | | | | | | | | | | |
| fan constant C _{ind-fan,i} | | | | | | | | | | |

6. Engine performance (declared by manufacturer)

6.1. Engine test speeds for emissions test according to Annex 4 of UN/ECE Regulation 49 Rev. 06⁽³⁾

Low speed (n_{lo}) ... min⁻¹

High speed (n_{hi}) ... min⁻¹

Idle speed ... min⁻¹

Preferred speed ... min⁻¹

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

n_{95h} ... min⁻¹

6.2. Declared values for power test according to Regulation No. 85

6.2.1. Idle speed ... min⁻¹

6.2.2. Speed at maximum power ... min⁻¹

6.2.3. Maximum power ... kW

6.2.4. Speed at maximum torque ... min⁻¹

6.2.5. Maximum torque ... Nm

Appendix 3

Engine CO₂-Family

1. Parameters defining the engine CO₂-family

The engine CO₂-family, as determined by the manufacturer, shall comply with the membership criteria defined in accordance with paragraph 5.2.3. of Annex 4 to UN/ECE Regulation 49 Rev.06. An engine CO₂-family may consist of only one engine.

In addition to those membership criteria, the engine CO₂-family, as determined by the manufacturer, shall comply with the membership criteria listed in paragraph 1.1 to 1.9 of this Appendix.

In addition to the parameters listed below, the manufacturer may introduce additional criteria allowing the definition of families of more restricted size. These parameters are not necessarily parameters that have an influence on the level of fuel consumption.

- 1.1. Combustion relevant geometric data
 - 1.1.1. Displacement per cylinder
 - 1.1.2. Number of cylinders
 - 1.1.3. Bore and stroke data
 - 1.1.4. Combustion chamber geometry and compression ratio
 - 1.1.5. Valve diameters and port geometry
 - 1.1.6. Fuel injectors (design and position)
 - 1.1.7. Cylinder head design
 - 1.1.8. Piston and piston ring design
- 1.2. Air management relevant components
 - 1.2.1. Pressure charging equipment type (waste gate, VTG, 2-stage, other) and thermodynamic characteristics
 - 1.2.2. Charge air cooling concept
 - 1.2.3. Valve timing concept (fixed, partly flexible, flexible)
 - 1.2.4. EGR concept (uncooled/cooled, high/low pressure, EGR-control)
- 1.3. Injection system
- 1.4. Auxiliary/equipment propulsion concept (mechanically, electrically, other)
- 1.5. Waste heat recovery (yes/no; concept and system)
- 1.6. Aftertreatment system
 - 1.6.1. Reagent dosing system characteristics (reagent and dosing concept)
 - 1.6.2. Catalyst and DPF (arrangement, material and coating)
 - 1.6.3. HC dosing system characteristics (design and dosing concept)
- 1.7. Full load curve

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 1.7.1. The torque values at each engine speed of the full load curve of the CO₂-parent engine determined in accordance with paragraph 4.3.1. shall be equal or higher than for all other engine within the same CO₂-family at the same engine speed over the whole engine speed range recorded.
- 1.7.2. The torque values at each engine speed of the full load curve of the engine with the lowest power rating of all engines within the engine CO₂-family determined in accordance with paragraph 4.3.1. shall be equal or lower than for all other engines within the same CO₂-family at the same engine speed over the whole engine speed range recorded.
- [^{F2}1.7.3. Torque values within a tolerance band related to the reference described in points 1.7.1 and 1.7.2. are considered as equal. The tolerance band is defined as + 20 Nm or + 2 percent of the CO₂ parent engine torque at the particular engine speed, whichever is greater.]
- 1.8. Characteristic engine test speeds
- [^{F1}1.8.1. The engine idle speed, n_{idle} , of the CO₂-parent engine as declared by the manufacturer at the application for certification in the information document in accordance with point 3.2.1.6 of Appendix 2 to this Annex shall be equal or lower than for all other engines within the same CO₂-family.]
- 1.8.2. The engine speed n_{95h} of all other engines than the CO₂-parent engine within the same CO₂-family, determined from the engine full load curve recorded in accordance with paragraph 4.3.1 by applying the definitions of characteristic engine speeds in accordance with paragraph 7.4.6. of Annex 4 to UN/ECE Regulation 49 Rev.06, shall not deviate from the engine speed n_{95h} of the CO₂-parent engine by more than ± 3 percent.
- 1.8.3. The engine speed n_{57} of all other engines than the CO₂-parent engine within the same CO₂-family, determined from the engine full load curve recorded in accordance with paragraph 4.3.1 by applying the definitions in accordance with paragraph 4.3.5.2.1, shall not deviate from the engine speed n_{57} of the CO₂-parent engine by more than ± 3 percent.
- 1.9. Minimum number of points in the fuel consumption map
- 1.9.1. All engines within the same CO₂-family shall have a minimum number of 54 mapping points of the fuel consumption map located below their respective engine full load curve determined in accordance with paragraph 4.3.1.

2. Choice of the CO₂-parent engine

The CO₂-parent engine of the engine CO₂-family shall be selected in accordance with the following criteria:

- 2.1. Highest power rating of all engines within the engine CO₂-family.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 4

Conformity of CO₂ emissions and fuel consumption related properties

1. General provisions
 - 1.1 Conformity of CO₂ emissions and fuel consumption related properties shall be checked on the basis of the description in the certificates set out in Appendix 1 to this Annex and on the basis of the description in the information document set out in Appendix 2 to this Annex.
 - 1.2 If an engine certificate has had one or more extensions, the tests shall be carried out on the engines described in the information package relating to the relevant extension.
 - 1.3 All engines subject to tests shall be taken from the series production meeting the selection criteria according to paragraph 3 of this Appendix.
 - 1.4 The tests may be conducted with the applicable market fuels. However, at the manufacturer's request, the reference fuels specified in paragraph 3.2 may be used.
 - 1.5 If tests for the purpose of conformity of CO₂ emissions and fuel consumption related properties of gas engines (natural gas, LPG) are conducted with market fuels the engine manufacturer shall demonstrate to the approval authority the appropriate determination of the gas fuel composition for the determination of the NCV according to paragraph 4 of this Appendix by good engineering judgement.
2. Number of engines and engine CO₂-families to be tested
 - 2.1 0,05 percent of all engines produced in the past production year within the scope of this regulation shall represent the basis to derive the number of engine CO₂-families and number of engines within those CO₂-families to be tested annually for verifying conformity of the certified CO₂ emissions and fuel consumption related properties. The resulting figure of 0,05 percent of relevant engines shall be rounded to the nearest whole number. This result shall be called $n_{\text{COP,base}}$.
 - 2.2 Notwithstanding the provisions in point 2.1, a minimum number of 30 shall be used for $n_{\text{COP,base}}$.
 - 2.3 The resulting figure for $n_{\text{COP,base}}$ determined in accordance with points 2.1 and 2.2 of this Appendix shall be divided by 10 and the result rounded to the nearest whole number in order to determine the number of engine CO₂-families to be tested annually, $n_{\text{COP,fam}}$, for verifying conformity of the certified CO₂ emissions and fuel consumption related properties.
 - 2.4 In the case that a manufacturer has less CO₂-families than $n_{\text{COP,fam}}$ determined in accordance with point 2.3, the number of CO₂-families to be tested, $n_{\text{COP,fam}}$, shall be defined by the total number of CO₂-families of the manufacturer.
3. Selection of engine CO₂-families to be tested

From the number of engine CO₂-families to be tested determined in accordance with paragraph 2 of this Appendix, the first two CO₂-families shall be those with the highest production volumes.

The remaining number of engine CO₂-families to be tested shall be randomly selected from all existing engine CO₂-families and shall be agreed between the manufacturer and the approval authority.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

4. Testrun to be performed

[^{F1}The minimum number of engines to be tested for each engine CO₂-family, $n_{COP,min}$, shall be determined by dividing $n_{COP,base}$ by $n_{COP,fam}$, both values determined in accordance with point 2. The result for $n_{COP,min}$ shall be rounded to the nearest integer. If the resulting value for $n_{COP,min}$ is smaller than 4 it shall be set to 4, if it is greater than 19 it shall be set to 19.]

For each of the engine CO₂-families determined in accordance with paragraph 3 of this Appendix a minimum number of $n_{COP,min}$ engines within that family shall be tested in order to reach a pass decision in accordance with paragraph 9 of this Appendix.

The number of testruns to be performed within an engine CO₂-family shall be randomly assigned to the different engines within that CO₂-family and this assignment shall be agreed between the manufacturer and the approval authority.

Conformity of the certified CO₂ emissions and fuel consumption related properties shall be verified by testing the engines in the WHSC test in accordance with paragraph 4.3.4.

All boundary conditions as specified in this Annex for the certification testing shall apply, except for the following:

- (1) The laboratory test conditions in accordance with paragraph 3.1.1 of this Annex. The conditions in accordance with paragraph 3.1.1 are recommended and shall not be mandatory. Deviations may occur under certain ambient conditions at the testing site and should be minimized by the use of good engineering judgment.
- (2) In case reference fuel of the type B7 (Diesel / CI) in accordance with paragraph 3.2 of this Annex is used, the determination of the NCV in accordance with paragraph 3.2 of this Annex shall not be required.
- (3) In case market fuel or reference fuel other than B7 (Diesel / CI) is used, the NCV of the fuel shall be determined in accordance with the applicable standards defined in Table 1 of this Annex. With exemption of gas engines the NCV measurement shall be performed by only one lab independent from the engine manufacturer instead of two as required in accordance with paragraph 3.2 of this Annex. [^{F1}NCV for reference gas fuels (G₂₅/G_R, LPG fuel B) shall be calculated in accordance with the applicable standards in Table 1 of this Annex from the fuel analysis submitted by the reference gas fuel supplier.]
- (4) The lubricating oil shall be the one filled during engine production and shall not be changed for the purpose of testing conformity of CO₂ emissions and fuel consumption related properties.

5. Run-in of newly manufactured engines

- 5.1 The tests shall be carried out on newly manufactured engines taken from the series production which have a maximum run-in time of 15 hours before the testrun for the verification of conformity of the certified CO₂ emissions and fuel consumption related properties in accordance with paragraph 4 of this Appendix is started.
- 5.2 At the request of the manufacturer, the tests may be carried out on engines which have been run-in up to a maximum of 125 hours. In this case, the running-in procedure shall be conducted by the manufacturer who shall not make any adjustments to those engines.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 5.3 When the manufacturer requests to conduct a running-in procedure in accordance with point 5.2 of this Appendix it may be carried out on either of the following:
- (a) all the engines that are tested
 - (b) newly produced engine, with the determination of an evolution coefficient as follows:
 - A. The specific fuel consumption shall be measured over the WHSC test once on the newly manufactured engine with a maximum run-in time of 15 hours in accordance with point 5.1 of this Appendix and in the second test before the maximum of 125 hours set in point 5.2 of this Appendix on the first engine tested.
 - B. The values for the specific fuel consumption of both tests shall be adjusted to a corrected value in accordance with paragraphs 7.2 and 7.3 of this Appendix for the respective fuel used during each of the two tests.
 - C. The evolution coefficient of the fuel consumption shall be calculated by dividing the corrected specific fuel consumption of the second test by the corrected specific fuel consumption of the first test. The evolution coefficient may have a value less than one.
- 5.4 If the provisions defined in point 5.3 (b) of this Appendix are applied, the subsequent engines selected for testing of conformity of CO₂ emissions and fuel consumption related properties shall not be subjected to the running-in procedure, but their specific fuel consumption over the WHSC determined on the newly manufactured engine with a maximum run-in time of 15 hours in accordance with point 5.1 of this Appendix shall be multiplied by the evolution coefficient.
- 5.5 In the case described in point 5.4 of this Appendix the values for the specific fuel consumption over the WHSC to be taken shall be the following:
- (a) for the engine used for determination of the evolution coefficient in accordance with point 5.3 (b) of this Appendix, the value from the second test
 - (b) for the other engines, the values determined on the newly manufactured engine with a maximum run-in time of 15 hours in accordance with point 5.1 of this Appendix multiplied by the evolution coefficient determined in accordance with point 5.3 (b) (C) of this Appendix
- 5.6. Instead of using a running-in procedure in accordance with points 5.2 to 5.5 of this Appendix, a generic evolution coefficient of 0,99 may be used at the request of the manufacturer. In this case the specific fuel consumption over the WHSC determined on the newly manufactured engine with a maximum run-in time of 15 hours in accordance with point 5.1 of this Appendix shall be multiplied by the generic evolution coefficient of 0,99.
- 5.7 If the evolution coefficient in accordance with point 5.3 (b) of this Appendix is determined using the parent engine of an engine family according to paragraphs 5.2.3. and 5.2.4. of Annex 4 to Regulation UN/ECE R.49.06, it may be carried across to all members of any CO₂-family belonging to the same engine family according to paragraph 5.2.3. of Annex 4 to Regulation UN/ECE R.49.06.
6. Target value for assessment of conformity of the certified CO₂ emissions and fuel consumption related properties

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

The target value to assess the conformity of the certified CO₂ emissions and fuel consumption related properties shall be the corrected specific fuel consumption over the WHSC, $SFC_{WHSC,corr}$, in g/kWh determined in accordance with paragraph 5.3.3 and documented in the information document as part of the certificates set out in Appendix 2 to this Annex for the specific engine tested.

7. Actual value for assessment of conformity of the certified CO₂ emissions and fuel consumption related properties
 - 7.1 The specific fuel consumption over the WHSC, SFC_{WHSC} , shall be determined in accordance with paragraph 5.3.3 of this Annex from the testruns performed in accordance with paragraph 4 of this Appendix. At the request of the manufacturer the specific fuel consumption value determined shall be modified by applying the provisions defined in points 5.3 to 5.6 of this Appendix.
 - 7.2 If market fuel was used during testing in accordance with point 1.4 of this Appendix, the specific fuel consumption over the WHSC, SFC_{WHSC} , determined in point 7.1 of this Appendix shall be adjusted to a corrected value, $SFC_{WHSC,corr}$, in accordance with paragraph 5.3.3.1 of this Annex.
 - 7.3 If reference fuel was used during testing in accordance with point 1.4 of this Appendix the special provisions defined in paragraph 5.3.3.2 of this Annex shall be applied to the value determined in point 7.1 of this Appendix.
 - 7.4 The measured emission of gaseous pollutants over the WHSC performed in accordance with paragraph 4 shall be adjusted by application of the appropriate deterioration factors (DF's) for that engine as recorded in the Addendum to the EC type-approval certificate granted in accordance with Commission Regulation (EU) No 582/2011.

[^{F18} Limit for conformity of one single test

For diesel engines, the limit values for the assessment of conformity of one single engine tested shall be the target value determined in accordance with point (6) + 4 percent.

For gas engines, the limit values for the assessment of conformity of one single engine tested shall be the target value determined in accordance with point (6) + 5 percent.]

9. Assessment of conformity of the certified CO₂ emissions and fuel consumption related properties
 - 9.1 The emission test results over the WHSC determined in accordance with point 7.4 of this Appendix shall meet the applicable limits values defined in Annex I to Regulation (EC) No 595/2009 for all gaseous pollutants except ammonia, otherwise the test shall be considered void for the assessment of conformity of the certified CO₂ emissions and fuel consumption related properties.
 - 9.2 A single test of one engine tested in accordance with paragraph 4 of this Appendix shall be considered as nonconforming if the actual value in accordance with paragraph 7 of this Appendix is higher than the limit values defined in accordance with paragraph 8 of this Appendix.
 - 9.3 For the current sample size of engines tested within one CO₂-family in accordance with paragraph 4 of this Appendix the test statistic quantifying the cumulative number of nonconforming tests in accordance with point 9.2 of this Appendix at the nth test shall be determined.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- (a) If the cumulative number of nonconforming tests at the n^{th} test determined in accordance with point 9.3 of this Appendix is less than or equal to the pass decision number for the sample size given in Table 4 of Appendix 3 to UN/ECE Regulation 49 Rev.06, a pass decision is reached.
 - (b) If the cumulative number of nonconforming tests at the n^{th} test determined in accordance with point 9.3 of this Appendix is greater than or equal to the fail decision number for the sample size given in Table 4 of Appendix 3 to UN/ECE Regulation 49 Rev.06, a fail decision is reached.
 - (c) Otherwise, an additional engine is tested in accordance with paragraph 4 of this Appendix and the calculation procedure in accordance with point 9.3 of this Appendix is applied to the sample increased by one more unit.
- 9.4 If neither a pass nor a fail decision is reached, the manufacturer may at any time decide to stop testing. In that case a fail decision is recorded.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 5

Determination of power consumption of engine components

1. Fan

The engine torque shall be measured at engine motoring with and without fan engaged with the following procedure:

- (i) Install the fan according to product instruction before the test starts.
- (ii) Warm up phase: The engine shall be warmed up according to the recommendation of the manufacturer and by practicing good engineering judgement (eg operating the engine for 20 minutes at mode 9, as defined in Table 1 of paragraph 7.2.2. of Annex 4 to UN/ECE Regulation 49 Rev.06).
- (iii) [F¹Stabilization phase: After the warm-up or optional warm-up step (v) is completed the engine shall be operated with minimum operator demand (motoring) at engine speed n_{pref} for 130 ± 2 seconds with the fan disengaged ($n_{fan_disengage} < 0,75 * n_{engine} * r_{fan}$). The first 60 ± 1 seconds of this period are considered as a stabilization period, during which the actual engine speed shall be held within $\pm 5 \text{ min}^{-1}$ of n_{pref} .]
- (iv) Measurement phase: During the following period of 60 ± 1 seconds the actual engine speed shall be held within $\pm 2 \text{ min}^{-1}$ of n_{pref} and the coolant temperature within $\pm 5 \text{ }^\circ\text{C}$ while the torque for motoring the engine with the fan disengaged, the fan speed and the engine speed shall be recorded as an average value over this period of 60 ± 1 seconds. The remaining period of 10 ± 1 seconds shall be used for data post-processing and storage if necessary.
- (v) Optional warmup phase: Upon manufacturer's request and according to good engineering judgement step (ii) can be repeated (e.g. if the temperature has dropped more than $5 \text{ }^\circ\text{C}$)
- (vi) Stabilization phase: After the optional warm-up is completed the engine shall be operated with minimum operator demand (motoring) at engine speed n_{pref} for 130 ± 2 seconds with the fan engaged ($n_{fan_engage} > 0,9 * n_{engine} * r_{fan}$) The first 60 ± 1 seconds of this period are considered as a stabilization period, during which the actual engine speed shall be held within $\pm 5 \text{ min}^{-1}$ of n_{pref} .
- (vii) Measurement phase: During the following period of 60 ± 1 seconds the actual engine speed shall be held within $\pm 2 \text{ min}^{-1}$ of n_{pref} and the coolant temperature within $\pm 5 \text{ }^\circ\text{C}$ while the torque for motoring the engine with the fan engaged, the fan speed and the engine speed shall be recorded as an average value over this period of 60 ± 1 seconds. The remaining period of 10 ± 1 seconds shall be used for data post-processing and storage if necessary.
- (viii) Steps (iii) to (vii) shall be repeated at engine speeds n_{95h} and n_{hi} instead of n_{pref} with an optional warmup step (v) before each stabilization step if needed to maintain a stable coolant temperature ($\pm 5 \text{ }^\circ\text{C}$), according to good engineering judgement.
- (ix) If the standard deviation of all calculated C_i according to the equation below at the three speeds n_{pref} , n_{95h} and n_{hi} is equal or higher than 3 percent, the measurement shall be performed for all engine speeds defining the grid for the fuel mapping procedure (FCMC) according to paragraph 4.3.5.2.1.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

The actual fan constant shall be calculated from the measurement data according to the following equation:

$$C_i = \frac{MD_{fan_disengage} - MD_{fan_engage}}{(n_{fan_engage}^2 - n_{fan_disengage}^2)} \times 10^6$$

where:

| | |
|-----------------------|---|
| C_i | fan constant at certain engine speed |
| $MD_{fan_disengage}$ | measured engine torque at motoring with fan disengaged (Nm) |
| MD_{fan_engage} | measured engine torque at motoring with fan engaged (Nm) |
| n_{fan_engage} | fan speed with fan engaged (min^{-1}) |
| $n_{fan_disengage}$ | fan speed with fan disengaged min^{-1}) |
| $[^F]r_{fan}$ | ratio of the speed of the engine-side of the fan clutch to the speed of the crankshaft] |

If the standard deviation of all calculated C_i at the three speeds n_{pref} , n_{95h} and n_{hi} is less than 3 %, an average value $C_{avg-fan}$ determined over the three speeds n_{pref} , n_{95h} and n_{hi} shall be used for the fan constant.

If the standard deviation of all calculated C_i at the three speeds n_{pref} , n_{95h} and n_{hi} is equal or higher than 3 %, individual values determined for all engine speeds according to point (ix) shall be used for the fan constant $C_{ind-fan,i}$. The value of the fan constant for the actual engine speed C_{fan} , shall be determined by linear interpolation between the individual values $C_{ind-fan,i}$ of the fan constant.

The engine torque for driving the fan shall be calculated according to the following equation:

$$M_{fan} = C_{fan} \cdot n_{fan}^2 \cdot 10^{-6}$$

where:

| | |
|-----------|---|
| M_{fan} | engine torque for driving fan (Nm) |
| C_{fan} | fan constant $C_{avg-fan}$ or $C_{ind-fan,i}$ corresponding to n_{engine} |

The mechanical power consumed by the fan shall be calculated from the engine torque for driving the fan and the actual engine speed. Mechanical power and engine torque shall be taken into account in accordance with paragraph 3.1.2.

2. Electric components/equipment

The electric power supplied externally to electric engine components shall be measured. This measured value shall be corrected to mechanical power by dividing it by a generic efficiency value of 0,65. This mechanical power and the corresponding engine torque shall be taken into account in accordance with paragraph 3.1.2.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 6

1. Markings

In the case of an engine being certified in accordance with this Annex, the engine shall bear:


- [^{F1}1.1. The manufacturer's name or trade mark]
- 1.2 The make and identifying type indication as recorded in the information referred to in point 0.1 and 0.2 of Appendix 2 to this Annex
- 1.3 The certification mark as a rectangle surrounding the lower-case letter 'e' followed by the distinguishing number of the Member State which has granted the certificate:
- 1 for Germany;
 - 2 for France;
 - 3 for Italy;
 - 4 for the Netherlands;
 - 5 for Sweden;
 - 6 for Belgium;
 - 7 for Hungary;
 - 8 for the Czech Republic;
 - 9 for Spain;
 - 11 for the United Kingdom;
 - 12 for Austria;
 - 13 for Luxembourg;
 - 17 for Finland;
 - 18 for Denmark;
 - 19 for Romania;
 - 20 for Poland;
 - 21 for Portugal;
 - 23 for Greece;
 - 24 for Ireland;
 - 25 for Croatia;
 - 26 for Slovenia;
 - 27 for Slovakia;
 - 29 for Estonia;
 - 32 for Latvia;
 - 34 for Bulgaria;
 - 36 for Lithuania;
 - 49 for Cyprus;
 - 50 for Malta
- 1.4 The certification mark shall also include in the vicinity of the rectangle the 'base approval number' as specified for Section 4 of the type-approval number set out in Annex VII to Directive 2007/46/EC, preceded by the two figures indicating the sequence number assigned to the latest technical amendment to this Regulation and by a character 'E' indicating that the approval has been granted for an engine.

For this Regulation, the sequence number shall be 00.

- 1.4.1 Example and dimensions of the certification mark (separate marking)

Status: Point in time view as at 31/01/2020.


Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

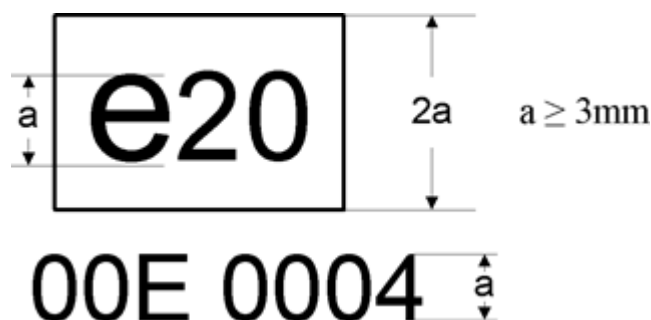

The above certification mark affixed to an engine shows that the type concerned has been certified in Poland (e20), pursuant to this Regulation. The first two digits (00) are indicating the sequence number assigned to the latest technical amendment to this Regulation. The following letter indicates that the certificate was granted for an engine (E). The last four digits (0004) are those allocated by the approval authority to the engine as the base approval number.

[^F1.5. In the case that the certification in accordance with this Regulation is granted at the same time as the type approval for an engine as separate technical unit in accordance with Regulation (EU) No 582/2011, the marking requirements laid down in point 1.4 may follow, separated by '/', the marking requirements laid down in Appendix 8 to Annex I to Regulation (EU) No 582/2011.

1.5.1. Example of the certification mark (joined marking)

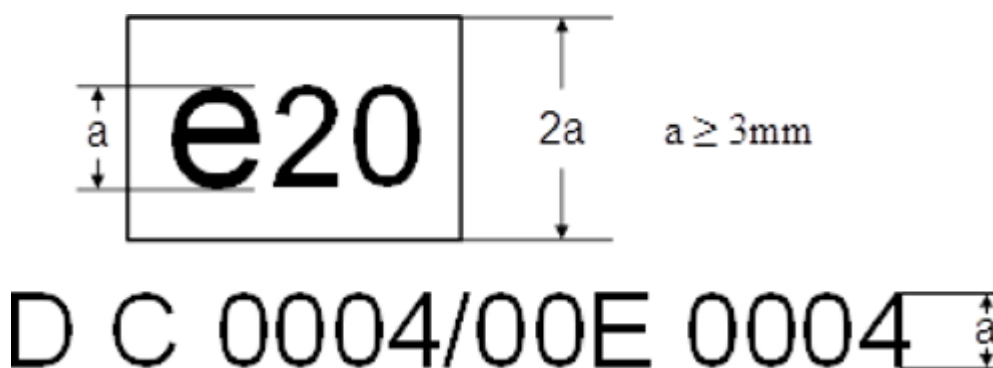

The above certification mark affixed to an engine shows that the type concerned has been certified in Poland (e20), pursuant to Regulation (EU) No 582/2011. The 'D' indicates Diesel followed by a 'C' for the emission stage followed by four digits (0004) which are those allocated by the approval authority to the engine as the base approval number for Regulation (EU) No 582/2011. After the slash the first two figures are indicating the sequence number assigned to the latest technical amendment to this Regulation, followed by a letter 'E' for engine, followed by four digits allocated by the approval authority for the purpose of certification in accordance with this Regulation ('base approval number' to this regulation).]

1.6. On request of the applicant for certification and after prior agreement with the approval authority other type sizes than indicated in point 1.4.1 and 1.5.1 may be used. Those other type sizes shall remain clearly legible.

1.7. The markings, labels, plates or stickers must be durable for the useful life of the engine and must be clearly legible and indelible. The manufacturer shall ensure that the markings, labels, plates or sticker cannot be removed without destroying or defacing them.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

2 Numbering

[^F2.1. Certification number for engines shall comprise the following:

eX*YYYY/YYYY*ZZZZ/ZZZZ*E*0000*00

| Section 1 | Section 2 | Section 3 | Additional letter to Section 3 | Section 4 | Section 5 |
|---|--|--|--------------------------------|--------------------------------|---------------|
| Indication of country issuing the certification | HDV CO ₂ certification Regulation (2017/2400) | Latest amending Regulation (ZZZZ/ZZZZ) | E — engine | Base certification number 0000 | Extension 00] |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 7

Input parameters for the simulation tool

Introduction

This Appendix describes the list of parameters to be provided by the component manufacturer as input to the simulation tool. The applicable XML schema as well as example data are available at the dedicated electronic distribution platform.

The XML is automatically generated by the engine pre-processing tool.

Definitions

- [^{F1}(1) ‘Parameter ID’:
(2) ‘Type’:
string ... sequence of characters in ISO8859-1 encoding
token ... sequence of characters in ISO8859-1 encoding, no leading/trailing whitespace
date ... date and time in UTC time in the format: YYYY-MM-DDTHH:MM:SSZ with italic letters denoting *fixed characters* e.g. ‘2002-05-30T09:30:10Z’
integer ... value with an integral data type, no leading zeros, e.g. ‘1800’
double, X ... fractional number with exactly X digits after the decimal sign (‘.’) and no leading zeros e.g. for ‘double, 2’: ‘2345.67’; for ‘double, 4’: ‘45.6780’
(3) ‘Unit’ ... physical unit of the parameter
Set of input parameters

TABLE 1

Input parameters ‘Engine/General’

| Parameter name | Parameter ID | Type | Unit | Description/Reference |
|-------------------------------------|--------------|----------|--------------------|--|
| Manufacturer | P200 | token | [-] | |
| Model | P201 | token | [-] | |
| [^{F1} CertificationNumber | P202 | token | [-] |] |
| Date | P203 | dateTime | [-] | Date and time when the component-hash is created |
| AppVersion | P204 | token | [-] | Version number of engine pre-processing tool |
| Displacement | P061 | int | [cm ³] | |
| IdlingSpeed | P063 | int | [1/min] | |
| RatedSpeed | P249 | int | [1/min] | |
| RatedPower | P250 | int | [W] | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | |
|-------------------------|------|-----------|------|---|
| MaxEngineTorque | P259 | int | [Nm] | |
| WHTCUrban | P109 | double, 4 | [-] | |
| WHTCRural | P110 | double, 4 | [-] | |
| WHTCMotorway | P111 | double, 4 | [-] | |
| BFColdHot | P159 | double, 4 | [-] | |
| CFRegPer | P192 | double, 4 | [-] | |
| CFNCV | P260 | double, 4 | [-] | |
| [^F FuelType | P193 | string | [-] | Allowed values: 'Diesel CI', 'Ethanol CI', 'Petrol PI', 'Ethanol PI', 'LPG PI', 'NG PI', 'NG CI'] |

TABLE 2

Input parameters 'Engine/FullloadCurve' for each grid point in the full load curve

| Parameter name | Parameter ID | Type | Unit | Description/Reference |
|----------------|--------------|-----------|---------|-----------------------|
| EngineSpeed | P068 | double, 2 | [1/min] | |
| MaxTorque | P069 | double, 2 | [Nm] | |
| DragTorque | P070 | double, 2 | [Nm] | |

TABLE 3

Input parameters 'Engine/FuelMap' for each grid point in the fuel map

| Parameter name | Parameter ID | Type | Unit | Description/Reference |
|-----------------|--------------|-----------|---------|-----------------------|
| EngineSpeed | P072 | double, 2 | [1/min] | |
| Torque | P073 | double, 2 | [Nm] | |
| FuelConsumption | P074 | double, 2 | [g/h] | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 8

Important evaluation steps and equations of the engine pre-processing tool

This Appendix describes the most important evaluation steps and underlying basic equations that are performed by the engine pre-processing tool. The following steps are performed during evaluation of the input data in the order listed:

1. Reading of input files and automatic check of input data
 - 1.1 Check of requirements for input data according to the definitions in paragraph 6.1 of this Annex
 - 1.2 Check of requirements for recorded FCMC data according to the definitions in paragraph 4.3.5.2 and subpoint (1) of paragraph 4.3.5.5 of this Annex
2. Calculation of characteristic engine speeds from full load curves of parent engine and actual engine for certification according to the definitions in paragraph 4.3.5.2.1 of this Annex
3. Processing of fuel consumption (FC) map
 - 3.1 FC values at n_{idle} are copied to engine speed ($n_{idle} - 100 \text{ min}^{-1}$) in the map
 - 3.2 FC values at n_{95h} are copied to engine speed ($n_{95h} + 500 \text{ min}^{-1}$) in the map
 - 3.3 Extrapolation of FC values at all engine speed setpoints to a torque value of (1.1 times $T_{max_overall}$) by using least squares linear regression based on the 3 measured FC points with the highest torque values at each engine speed setpoint in the map
 - 3.4 Adding of FC = 0 for interpolated motoring torque values at all engine speed setpoints in the map
 - 3.5 Adding of FC = 0 for minimum of interpolated motoring torque values from subpoint (3.4) minus 100 Nm at all engine speed setpoints in the map
4. Simulation of FC and cycle work over WHTC and respective subparts for actual engine for certification
 - 4.1. WHTC reference points are denormalized using the full load curve input in originally recorded resolution
 - 4.2. FC is calculated for WHTC denormalized reference values for engine speed and torque from subpoint 4.1
 - 4.3. FC is calculated with engine inertia set to 0
 - 4.4. FC is calculated with standard PT1-function (as in main vehicle simulation) for engine torque response active
 - 4.5. FC for all motoring points is set to 0
 - 4.6. FC for all non-motoring engine operation points is calculated from FC map by Delaunay interpolation method (as in main vehicle simulation)
 - 4.7. Cycle work and FC are calculated according to equations defined in paragraphs 5.1 and 5.2 of this Annex
 - 4.8. Simulated specific FC values are calculated analogous to equations defined in paragraphs 5.3.1 and 5.3.2 of this Annex for measured values

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

5. Calculation of WHTC correction factors
 - 5.1. Measured values from input to pre-processing tool and simulated values from point (4) are used in accordance with the equations in points (5.2) to (5.4)
 - 5.2. $CF_{Urban} = SFC_{meas,Urban} / SFC_{simu,Urban}$
 - 5.3. $CF_{Rural} = SFC_{meas,Rural} / SFC_{simu,Rural}$
 - 5.4. $CF_{MW} = SFC_{meas,MW} / SFC_{simu,MW}$
 - 5.5. In case that the calculated value for a correction factor is lower than 1, the respective correction factor is set to 1
6. Calculation of cold-hot emission balancing factor
 - 6.1. This factor is calculated in accordance with the equation in point (6.2)
 - 6.2. $BF_{cold-hot} = 1 + 0,1 \times (SFC_{meas,cold} - SFC_{meas,hot}) / SFC_{meas,hot}$
 - 6.3. In case that the calculated value for this factor is lower than 1, the factor is set to 1
7. Correction of FC values in FC map to standard NCV
 - 7.1. This correction is performed in accordance with the equation in point (7.2)
 - 7.2. $FC_{corrected} = FC_{measured,map} \times NCV_{meas} / NVC_{std}$
 - 7.3. $FC_{measured,map}$ shall be the FC value in the FC map input data processed in accordance with point (3)
 - 7.4. NCV_{meas} and NVC_{std} shall be defined in accordance with paragraph 5.3.3.1 of this Annex
 - 7.5. In the case that reference fuel of the type B7 (Diesel / CI) in accordance with paragraph 3.2 of this Annex was used during testing, the correction in accordance with points (7.1) to (7.4) is not performed.
8. Converting of engine full load and motoring torque values of the actual engine for certification to a logging frequency of the engine speed of 8 min^{-1}
 - [^{F18.1}8.1. If the average logging frequency of the engine speed of the originally recorded full load curve is smaller than 6, the conversion is performed by arithmetical averaging over intervals of $\pm 4 \text{ min}^{-1}$ of the given setpoint for the output data based on the full load curve input in originally recorded resolution. If the average logging frequency of the engine speed of the originally recorded full load curve is greater than or equal to 6, the conversion is performed by linear interpolation based on the full load curve input in originally recorded resolution.]

ANNEX VI

VERIFYING TRANSMISSION, TORQUE CONVERTER, OTHER TORQUE TRANSFERRING COMPONENT AND ADDITIONAL DRIVELINE COMPONENT DATA

1. Introduction

This annex describes the certification provisions regarding the torque losses of transmissions, torque converter (TC), other torque transferring components (OTTC) and additional driveline components (ADC) for heavy duty vehicles. In addition it defines calculation procedures for the standard torque losses.

Torque converter (TC), other torque transferring components (OTTC) and additional driveline components (ADC) can be tested in combination with a transmission or as a separate unit. In the case that those components are tested separately the provisions of section 4, 5 and 6 apply. Torque losses resulting from the drive mechanism between the transmission and those components can be neglected.

2. Definitions

For the purposes of this Annex the following definitions shall apply:

- (1) ‘Transfer case’ means a device that splits the engine power of a vehicle and directs it to the front and rear drive axles. It is mounted behind the transmission and both front and rear drive shafts connect to it. It comprises either a gearwheel set or a chain drive system in which the power is distributed from the transmission to the axles. The transfer case will typically have the ability to shift between standard drive mode (front or rear wheel drive), high range traction mode (front and rear wheel drive), low range traction mode and neutral;
- (2) ‘Gear ratio’ means the forward gear ratio of the speed of the input shaft (towards prime mover) to the speed of the output shaft (towards driven wheels) without slip ($i = n_{in}/n_{out}$);
- (3) ‘Ratio coverage’ means the ratio of the largest to the smallest forward gear ratios in a transmission: $\varphi_{tot} = i_{max}/i_{min}$;
- (4) ‘Compound transmission’ means a transmission, with a large number of forward gears and/or large ratio coverage, composed of sub-transmissions, which are combined to use most power-transferring parts in several forward gears;
- (5) ‘Main section’ means the sub-transmission that has the largest number of forward gears in a compound transmission;
- (6) ‘Range section’ means a sub-transmission normally in series connection with the main section in a compound transmission. A range section usually has two shiftable forward gears. The lower forward gears of the complete transmission are embodied using the low range gear. The higher gears are embodied using the high range gear;
- (7) ‘Splitter’ means a design that splits the main section gears in two (usually) variants, low- and high split gears, whose gear ratios are close compared to the ratio coverage of the transmission. A splitter can be a separate sub-transmission, an add-on device, integrated with the main section or a combination thereof;

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- (8) ‘Tooth clutch’ means a clutch where torque is transferred mainly by normal forces between mating teeth. A tooth clutch can either be engaged or disengaged. It is operated in load-free conditions, only (e.g., at gear shifts in a manual transmission);
- (9) ‘Angle drive’ means a device that transmits rotational power between non-parallel shafts, often used with transversely oriented engine and longitudinal input to driven axle;
- (10) ‘Friction clutch’ means clutch for transfer of propulsive torque, where torque is sustainably transferred by friction forces. A friction clutch can transmit torque while slipping, it can thereby (but does not have to) be operated at start-offs and at powershifts (retained power transfer during a gear shift);
- (11) ‘Synchroniser’ means a type of tooth clutch where a friction device is used to equalise the speeds of the rotating parts to be engaged;
- (12) ‘Gear mesh efficiency’ means the ratio of output power to input power when transmitted in a forward gear mesh with relative motion;
- (13) ‘Crawler gear’ means a low forward gear (with speed reduction ratio that is larger than for the non-crawler gears) that is designed to be used infrequently, e.g., at low-speed manoeuvres or occasional up-hill start-offs;
- (14) ‘Power take-off (PTO)’ means a device on a transmission or an engine to which an auxiliary driven device, e.g., a hydraulic pump, can be connected;
- (15) ‘Power take-off drive mechanism’ means a device in a transmission that allows the installation of a power take-off (PTO);
- (16) ‘Lock-up clutch’ means a friction clutch in a hydrodynamic torque converter; it can connect the input and output sides, thereby eliminating the slip;
- (17) ‘Start-off clutch’ means a clutch that adapts speed between engine and driven wheels when the vehicle starts off. The start-off clutch is usually located between engine and transmission;
- (18) ‘Synchronised Manual Transmission (SMT)’ means a manually operated transmission with two or more selectable speed ratios that are obtained using synchronisers. Ratio changing is normally achieved during a temporary disconnection of the transmission from the engine using a clutch (usually the vehicle start-off clutch);
- (19) ‘Automated Manual Transmission or Automatic Mechanically-engaged Transmission (AMT)’ means an automatically shifting transmission with two or more selectable speed ratios that are obtained using tooth clutches (un-/synchronised). Ratio changing is achieved during a temporary disconnection of the transmission from the engine. The ratio shifts are performed by an electronically controlled system managing the timing of the shift, the operation of the clutch between engine and gearbox and the speed and torque of the engine. The system selects and engages the most suitable forward gear automatically, but can be overridden by the driver using a manual mode;
- (20) ‘Dual Clutch Transmission (DCT)’ means an automatically shifting transmission with two friction clutches and several selectable speed ratios that are obtained by the use of tooth clutches. The ratio shifts are performed by an electronically controlled system managing the timing of the shift, the operation of the clutches and the speed and torque of the engine. The system selects the most suitable gear automatically, but can be overridden by the driver using a manual mode;

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- (21) ‘Retarder’ means an auxiliary braking device in a vehicle powertrain; aimed for permanent braking;
- (22) ‘Case S’ means the serial arrangement of a torque converter and the connected mechanical parts of the transmission;
- (23) ‘Case P’ means the parallel arrangement of a torque converter and the connected mechanical parts of the transmission (e.g. in power split installations);
- (24) ‘Automatic Powershifting Transmission (APT)’ means an automatically shifting transmission with more than two friction clutches and several selectable speed ratios that are obtained mainly by the use of those friction clutches. The ratio shifts are performed by an electronically controlled system managing the timing of the shift, the operation of the clutches and the speed and torque of the engine. The system selects the most suitable gear automatically, but can be overridden by the driver using a manual mode. Shifts are normally performed without traction interruption (friction clutch to friction clutch);
- (25) ‘Oil conditioning system’ means an external system that conditions the oil of a transmission at testing. The system circulates oil to and from the transmission. The oil is thereby filtered and/or temperature conditioned;
- (26) ‘Smart lubrication system’ means a system that will affect the load independent losses (also called spin losses or drag losses) of the transmission depending on the input torque and/or power flow through the transmission. Examples are controlled hydraulic pressure pumps for brakes and clutches in an APT, controlled variable oil level in the transmission, controlled variable oil flow/pressure for lubrication and cooling in the transmission. Smart lubrication can also include control of the oil temperature of the transmission, but smart lubrication systems that are designed only for controlling the temperature are not considered here, since the transmission testing procedure has fixed testing temperatures;
- (27) ‘Transmission electric auxiliary’ means an electric auxiliary used for the function of the transmission during running steady state operation. A typical example is an electric cooling/lubrication pump (but not electric gear shift actuators and electronic control systems including electric solenoid valves, since they are low energy consumers, especially at steady state operation);
- (28) ‘Oil type viscosity grade’ means a viscosity grade as defined by SAE J306;
- (29) ‘Factory fill oil’ means the oil type viscosity grade that is used for the oil fill in the factory and which is intended to stay in the transmission, torque converter, other torque transferring component or in an additional driveline component for the first service interval;
- (30) ‘Gearscheme’ means the arrangement of shafts, gearwheels and clutches in a transmission;
- (31) ‘Powerflow’ means the transfer path of power from input to output in a transmission via shafts, gearwheels and clutches.

3. Testing procedure for transmissions

For testing the losses of a transmission the torque loss map for each individual transmission type shall be measured. Transmissions may be grouped into families with similar or equal CO₂-relevant data following the provisions of Appendix 6 to this Annex.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

For the determination of the transmission torque losses, the applicant for a certificate shall apply one of the following methods for each single forward gear (crawler gears excluded).

- (1) Option 1: Measurement of the torque independent losses, calculation of the torque dependent losses.
 - (2) Option 2: Measurement of the torque independent losses, measurement of the torque loss at maximum torque and interpolation of the torque dependent losses based on a linear model
 - (3) Option 3: Measurement of the total torque loss.
- 3.1 Option 1: Measurement of the torque independent losses, calculation of the torque dependent losses.

The torque loss $T_{l,in}$ on the input shaft of the transmission shall be calculated by

$$T_{l,in}(n_{in}, T_{in}, gear) = T_{l,in,min_loss} + f_T * T_{in} + f_{loss_corr} * T_{in} + T_{l,in,min_el} + f_{el_corr} * T_{in}$$

The correction factor for the torque dependent hydraulic torque losses shall be calculated by

$$f_{loss_corr} = \frac{(T_{l,in,max_loss} - T_{l,in,min_loss})}{T_{max,in}}$$

The correction factor for the torque dependent electric torque losses shall be calculated by

$$f_{el_corr} = \frac{(T_{l,in,max_el} - T_{l,in,min_el})}{T_{max,in}}$$

The torque loss at the input shaft of the transmission caused by the power consumption of transmission electric auxiliary shall be calculated by

$$T_{l,in,el} = \frac{P_{el}}{(0,7 \times n_{in} \times \frac{2\pi}{60})}$$

where:

| | |
|----------------------|--|
| $T_{l,in}$ | = Torque loss related to input shaft [Nm] |
| T_{l,in,min_loss} | = Torque independent loss at minimum hydraulic loss level (minimum main pressure, cooling/lubrication flows etc.), measured with free rotating output shaft from testing without load [Nm] |
| T_{l,in,max_loss} | = Torque independent loss at maximum hydraulic loss level (maximum main pressure, cooling/lubrication flows etc.), measured with free rotating output shaft from testing without load [Nm] |
| f_{loss_corr} | = Loss correction for hydraulic loss level depending on input torque [-] |
| n_{in} | = Speed at the transmission input shaft (downstream of torque converter, if applicable) [rpm] |
| f_T | = Torque loss coefficient = $1 - \eta_T$ |
| T_{in} | = Torque at the input shaft [Nm] |
| η_T | = Torque dependent efficiency (to be calculated); for a direct gear $f_T = 0,007$ ($\eta_T = 0,993$) [-] |
| f_{el_corr} | = Loss correction for electric power loss level depending on input torque [-] |
| $T_{l,in,el}$ | = Additional torque loss on input shaft by electric consumers [Nm] |
| T_{l,in,min_el} | = Additional torque loss on input shaft by electric consumers corresponding to minimum electric power [Nm] |
| T_{l,in,max_el} | = Additional torque loss on input shaft by electric consumers corresponding to maximum electric power [Nm] |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- P_{el} = Electric power consumption of electric consumers in transmission measured during transmission loss testing [W]
 $T_{max,in}$ = Maximum allowed input torque for any forward gear in the transmission [Nm]

3.1.1. The torque dependent losses of a transmission system shall be determined as described in the following:

In case of multiple parallel and nominally equal power flows, e.g., twin countershafts or several planet gearwheels in a planetary gear set, that can be treated as one power flow in this section.

3.1.1.1. For each indirect gear g of common transmissions with a non-split power flow and ordinary, non-planetary gear sets, the following steps shall be performed:

3.1.1.2. For each active gear mesh, the torque dependent efficiency shall be set to constant values of η_m :

- external – external gear meshes : $\eta_m = 0,986$
- external – internal gear meshes : $\eta_m = 0,993$
- angle drive gear meshes : $\eta_m = 0,97$

(Angle drive losses may alternatively be determined by separate testing as described in paragraph 6. of this Annex)

3.1.1.3. The product of these torque dependent efficiencies in active gear meshes shall be multiplied with a torque dependent bearing efficiency $\eta_b = 99,5 \%$.

3.1.1.4. The total torque dependent efficiency η_{Tg} for the gear g shall be calculated by:

$$\eta_{Tg} = \eta_b * \eta_{m,1} * \eta_{m,2} * [\dots] * \eta_{m,n}$$

3.1.1.5. The torque dependent loss coefficient f_{Tg} for the gear g shall be calculated by:

$$f_{Tg} = 1 - \eta_{Tg}$$

3.1.1.6. The torque dependent loss $T_{l,inTg}$ on the input shaft for gear g shall be calculated by:

$$T_{l,inTg} = f_{Tg} * T_{in}$$

3.1.1.7. The torque dependent efficiency of the planetary range section in low range state for the special case of transmissions consisting of a countershaft-type main section in series with a planetary range section (with non-rotating ring gearwheel and the planet carrier connected to the output shaft) may, alternatively to the procedure described in 3.1.1.8., be calculated by:

$$\eta_{lowrange} = \frac{1 + \eta_{m,ring} * \eta_{m,sun} * \frac{z_{ring}}{z_{sun}}}{1 + \frac{z_{ring}}{z_{sun}}}$$

where:

- $\eta_{m,ring}$ = Torque dependent efficiency of the ring-to-planet gear mesh = 99,3 % [-]
- $\eta_{m,sun}$ = Torque dependent efficiency of the planet-to-sun gear mesh = 98,6 % [-]
- Z_{sun} = Number of teeth of the sun gearwheel of the range section [-]
- Z_{ring} = Number of teeth of the ring gearwheel of the range section [-]

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

The planetary range section shall be regarded as an additional gear mesh within the countershaft main section, and its torque dependent efficiency $\eta_{lowrange}$ shall be included in the determination of the total torque dependent efficiencies η_{Tg} for the low-range gears in the calculation in 3.1.1.4.

3.1.1.8. For all other transmission types with more complex split power flows and/or planetary gear sets (e.g. a conventional automatic planetary transmission), the following simplified method shall be used to determine the torque dependent efficiency. The method covers transmission systems composed of ordinary, non-planetary gear sets and/or planetary gear sets of ring-planet-sun type. Alternatively the torque dependent efficiency may be calculated based on VDI Regulation No. 2157. Both calculations shall use the same constant gear mesh efficiency values defined in 3.1.1.2.

In this case, for each indirect gear g , the following steps shall be performed:

3.1.1.9. Assuming 1 rad/s of input speed and 1 Nm of input torque, a table of speed (N_i) and torque (T_i) values for all gearwheels with a fix rotational axis (sun gearwheels, ring gearwheels and ordinary gearwheels) and planet carriers shall be created. Speed and torque values shall follow the right-hand rule, with engine rotation as the positive direction.

3.1.1.10. For each planetary gear set, the relative speeds sun-to-carrier and ring-to-carrier shall be calculated by:

$$N_{sun-carrier} = N_{sun} - N_{carrier}$$

$$N_{ring-carrier} = N_{ring} - N_{carrier}$$

where:

| | | |
|---------------|---|--|
| N_{sun} | = | Rotational speed of sun gearwheel [rad/s] |
| N_{ring} | = | Rotational speed of ring gearwheel [rad/s] |
| $N_{carrier}$ | = | Rotational speed of carrier [rad/s] |

3.1.1.11. The loss-producing powers in the gear meshes shall be computed in the following way:

For each ordinary, non-planetary gear set, the power P shall be calculated by:

$$P_1 = N_1 \cdot T_1$$

$$P_2 = N_2 \cdot T_2$$

where:

| | | |
|-----|---|---------------------------------------|
| P | = | Power of gear mesh [W] |
| N | = | Rotational speed of gearwheel [rad/s] |
| T | = | Torque of gearwheel [Nm] |

For each planetary gear set, the virtual power of sun $P_{v,sun}$ and ring gearwheels $P_{v,ring}$ shall be calculated by:

$$P_{v,sun} = T_{sun} \cdot (N_{sun} - N_{carrier}) = T_{sun} \cdot N_{sun/carrier}$$

$$P_{v,ring} = T_{ring} \cdot (N_{ring} - N_{carrier}) = T_{ring} \cdot N_{ring/carrier}$$

where:

| | | |
|---------------|---|-------------------------------------|
| $P_{v,sun}$ | = | Virtual power of sun gearwheel [W] |
| $P_{v,ring}$ | = | Virtual power of ring gearwheel [W] |
| T_{sun} | = | Torque of sun gearwheel [Nm] |
| $T_{carrier}$ | = | Torque of carrier [Nm] |
| T_{ring} | = | Torque of ring gearwheel [Nm] |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Negative virtual power results shall indicate power leaving the gear set, positive virtual power results shall indicate power going into the gear set.

The loss-adjusted powers P_{adj} of the gear meshes shall be computed in the following way:

For each ordinary, non-planetary gear set, the negative power shall be multiplied by the appropriate torque dependent efficiency η_m :

$$P_i > 0 \# P_{i,adj} = P_i$$

$$P_i < 0 \# P_{i,adj} = P_i \cdot \eta_{mi}$$

where:

$$P_{adj} = \text{Loss-adjusted powers of the gear meshes [W]}$$

$$\eta_m = \text{Torque dependent efficiency (appropriate to gear mesh; see 3.1.1.2.) [-]}$$

For each planetary gear set, the negative virtual power shall be multiplied by the torque-dependent efficiencies of sun-to-planet η_{msun} and ring-to-planet η_{mring} :

$$P_{v,i} \geq 0 \# P_{i,adj} = P_{v,i}$$

$$P_{v,i} < 0 \# P_{i,adj} = P_i \cdot \eta_{msun} \cdot \eta_{mring}$$

where:

$$\eta_{msun} = \text{Torque dependent efficiency of sun-to-planet [-]}$$

$$\eta_{mring} = \text{Torque dependent efficiency of ring-to-planet [-]}$$

3.1.1.12. All loss-adjusted power values shall be added up to the torque dependent gear mesh power loss $P_{m,loss}$ of the transmission system referring to the input power:

$$P_{m,loss} = \sum P_{i,adj}$$

where:

$$i = \text{All gearwheels with a fix rotational axis [-]}$$

$$P_{m,loss} = \text{Torque dependent gear mesh power loss of the transmission system [W]}$$

3.1.1.13. The torque dependent loss coefficient for bearings,

$$f_{T,bear} = 1 - \eta_{bear} = 1 - 0,995 = 0,005$$

and the torque dependent loss coefficient for the gear mesh

$$f_{T,gearmesh} = \frac{P_{m,loss}}{P_{in}} = \frac{P_{m,loss}}{(1 \text{ Nm} \times 1 \frac{\text{rad}}{\text{s}})}$$

shall be added to receive the total torque dependent loss coefficient f_T for the transmission system:

$$f_T = f_{T,gearmesh} + f_{T,bear}$$

where:

$$f_T = \text{Total torque dependent loss coefficient for the transmission system [-]}$$

$$f_{T,bear} = \text{Torque dependent loss coefficient for the bearings [-]}$$

$$f_{T,gearmesh} = \text{Torque dependent loss coefficient for the gear meshes [-]}$$

$$P_{in} = \text{Fixed input power of the transmission; } P_{in} = (1 \text{ Nm} * 1 \text{ rad/s}) \text{ [W]}$$

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

3.1.1.14. The torque dependent losses on the input shaft for the specific gear shall be calculated by:

$$T_{l,inT} = f_T * T_{in}$$

where:

$T_{l,inT}$ = Torque dependent loss related to input shaft [Nm]

T_{in} = Torque at the input shaft [Nm]

3.1.2. The torque independent losses shall be measured in accordance with the procedure described in the following.

3.1.2.1. General requirements

The transmission used for the measurements shall be in accordance with the drawing specifications for series production transmissions and shall be new.

Modifications to the transmission to meet the testing requirements of this Annex, e.g. for the inclusion of measurement sensors or adaption of an external oil conditioning system are permitted.

The tolerance limits in this paragraph refer to measurement values without sensor uncertainty.

[^{F1}Total tested time per transmission individual and gear shall not exceed 5 times the actual testing time per gear (allowing re-testing of transmission if needed due to measuring or rig error).]

The same transmission individual may be used for a maximum of 10 different tests, e.g. for tests of transmission torque losses for variants with and without retarder (with different temperature requirements) or with different oils. If the same transmission individual is used for tests of different oils, the recommended factory fill oil shall be tested first.

It is not permitted to run a certain test multiple times to choose a test series with the lowest results.

Upon request of the approval authority the applicant for a certificate shall specify and prove the conformity with the requirements defined in this Annex.

3.1.2.2. Differential measurements

To subtract influences caused by the test rig setup (e.g. bearings, clutches) from the measured torque losses, differential measurements are permitted to determine these parasitic torques. The measurements shall be performed at the same speed steps and same test rig bearing temperature(s) ± 3 K used for the testing. The torque sensor measurement uncertainty shall be below 0,3 Nm.

3.1.2.3. Run-in

On request of the applicant a run-in procedure may be applied to the transmission. The following provisions shall apply for a run-in procedure.

3.1.2.3.1. The procedure shall not exceed 30 hours per gear and 100 hours in total.

3.1.2.3.2. The application of the input torque shall be limited to 100 % of maximum input torque.

3.1.2.3.3. The maximum input speed shall be limited by the specified maximum speed for the transmission.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

3.1.2.3.4. The speed and torque profile for the run-in procedure shall be specified by the manufacturer.

3.1.2.3.5. The run-in procedure shall be documented by the manufacturer with regard to run-time, speed, torque and oil temperature and reported to the Approval authority.

3.1.2.3.6. The requirements for the ambient temperature (3.1.2.5.1.), measurement accuracy (3.1.4.), test set-up (3.1.8.) and installation angle (3.1.3.2) shall not apply for the run-in procedure.

3.1.2.4. Pre-conditioning

3.1.2.4.1. Pre-conditioning of the transmission and the test rig equipment to achieve correct and stable temperatures before the run-in and testing procedures is allowed.

3.1.2.4.2. The pre-conditioning shall be performed on the direct drive gear without applied torque to the output shaft. If the transmission is not equipped with a direct drive gear, the gear with the ratio closest to 1:1 shall be used.

3.1.2.4.3. The maximum input speed shall be limited by the specified maximum speed for the transmission.

3.1.2.4.4. The maximum combined time for the pre-conditioning shall not exceed 50 hours in total for one transmission. Since the complete testing of a transmission may be divided into multiple test sequences (e.g. each gear tested with a separate sequence), the pre-conditioning may be split into several sequences. Each of the single pre-conditioning sequences shall not exceed 60 minutes.

3.1.2.4.5. The pre-conditioning time shall not be accounted to the time span allocated for the run-in or test procedures.

3.1.2.5. Test conditions

3.1.2.5.1. Ambient temperature

The ambient temperature during the test shall be in a range of $25\text{ °C} \pm 10\text{ K}$.

The ambient temperature shall be measured 1 m laterally from the transmission.

The ambient temperature limit shall not apply for the run-in procedure.

3.1.2.5.2. Oil temperature

Except for the oil, no external heating is allowed.

During measurement (except stabilization) the following temperature limits shall apply:

For SMT/AMT/DCT transmissions, the drain plug oil temperature shall not exceed 83 °C when measuring without retarder and 87 °C with retarder mounted to the transmission. If measurements of a transmission without retarder are to be combined with separate measurements of a retarder, the lower temperature limit shall apply to compensate for the retarder drive mechanism and step-up gear and for the clutch in case of a disengageable retarder.

For torque converter planetary transmissions and for transmissions having more than two friction clutches, the drain plug oil temperature shall not exceed 93 °C without retarder and 97 °C with retarder.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

To apply the above defined increased temperature limits for testing with retarder, the retarder shall be integrated in the transmission or have an integrated cooling or oil system with the transmission.

During the run-in, the same oil temperature specifications as for regular testing shall apply.

Exceptional oil temperature peaks up to 110 °C are allowed for the following conditions:

- (1) during run-in procedure up to maximum of 10 % of the applied run-in time,
- (2) during stabilization time.

The oil temperature shall be measured at the drain plug or in the oil sump.

3.1.2.5.3. Oil quality

New, recommended first fill oil for the European market shall be used in the test. The same oil fill may be used for run-in and torque measurement.

3.1.2.5.4. Oil viscosity

If multiple oils are recommended for first fill, they are considered to be equal if the oils have a kinematic viscosity within 10 % of each other at the same temperature (within the specified tolerance band for KV100). Any oil with lower viscosity than the oil used in the test shall be considered to result in lower losses for the tests performed within this option. Any additional first fill oil must fall either in the 10 % tolerance band or have lower viscosity than the oil in the test to be covered by the same certificate.

3.1.2.5.5. Oil level and conditioning

The oil level shall meet the nominal specifications for the transmission.

If an external oil conditioning system is used, the oil inside the transmission shall be kept to the specified volume that corresponds to the specified oil level.

To guarantee that the external oil conditioning system is not influencing the test, one test point shall be measured with the conditioning system both on and off. The deviation between the two measurements of the torque loss (= input torque) shall be less than 5 %. The test point is specified as follows:

- (1) gear = highest indirect gear,
- (2) input speed = 1 600 rpm,
- (3) temperatures as specified under 3.1.2.5.

For transmissions with hydraulic pressure control or a smart lubrication system, the measurement of torque independent losses shall be performed with two different settings: first with the transmission system pressure set to at least the minimum value for conditions with engaged gear and a second time with the maximum possible hydraulic pressure (see 3.1.6.3.1).

3.1.3. Installation

3.1.3.1. The electric machine and the torque sensor shall be mounted to the input side of the transmission. The output shaft shall rotate freely.

3.1.3.2. The installation of the transmission shall be done with an angle of inclination as for installation in the vehicle according to the homologation drawing $\pm 1^\circ$ or at $0^\circ \pm 1^\circ$.

3.1.3.3. The internal oil pump shall be included in the transmission.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

3.1.3.4. If an oil cooler is either optional or required with the transmission, the oil cooler may be excluded in the test or any oil cooler may be used in the test.

3.1.3.5. Transmission testing can be done with or without power take-off drive mechanism and/or power take-off. For establishing the power losses of power take-offs and /or power take-off drive mechanism, the values in Annex VII to this regulation are applied. These values assume that the transmission is tested without power take-off drive mechanism and /or power take-off.

3.1.3.6. Measuring the transmission may be performed with or without single dry clutch (with one or two plates) installed. Clutches of any other type shall be installed during the test.

3.1.3.7. The individual influence of parasitic loads shall be calculated for each specific test rig setup and torque sensor as described in 3.1.8.

3.1.4. Measurement equipment

The calibration laboratory facilities shall comply with the requirements of either ISO/TS 16949, ISO 9000 series or ISO/IEC 17025. All laboratory reference measurement equipment, used for calibration and/or verification, shall be traceable to national (international) standards.

3.1.4.1. Torque

The torque sensor measurement uncertainty shall be below 0,3 Nm.

The use of torque sensors with higher measurement uncertainties is allowed if the part of the uncertainty exceeding 0,3 Nm can be calculated and is added to the measured torque loss as described in 3.1.8. Measurement uncertainty.

3.1.4.2. Speed

The uncertainty of the speed sensors shall not exceed ± 1 rpm.

3.1.4.3. Temperature

The uncertainty of the temperature sensors for the measurement of the ambient temperature shall not exceed $\pm 1,5$ K.

The uncertainty of the temperature sensors for the measurement of the oil temperature shall not exceed $\pm 1,5$ K.

3.1.4.4. Pressure

The uncertainty of the pressure sensors shall not exceed 1 % of the maximum measured pressure.

3.1.4.5. Voltage

The uncertainty of the voltmeter shall not exceed 1 % of the maximum measured voltage.

3.1.4.6. Electric current

The uncertainty of the amperemeter shall not exceed 1 % of the maximum measured current.

3.1.5. Measurement signals and data recording

At least the following signals shall be recorded during the measurement:

- (1) Input torques [Nm]
- (2) Input rotational speeds [rpm]

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

(3) Ambient temperature [°C]

(4) Oil temperature [°C]

If the transmission is equipped with a shift and/or clutch system that is controlled by hydraulic pressure or with a mechanically driven smart lubrication system, additionally to be recorded:

(5) Oil pressure [kPa]

If the transmission is equipped with transmission electric auxiliary, additionally to be recorded:

(6) Voltage of transmission electric auxiliary [V]

(7) Current of transmission electric auxiliary [A]

For differential measurements for the compensation of influences caused by the test rig setup, additionally shall be recorded:

(8) Test rig bearing temperature [°C]

The sampling and recording rate shall be 100 Hz or higher.

A low pass filter shall be applied to reduce measurement errors.

3.1.6. Test procedure

3.1.6.1. Zero torque signal compensation:

The zero-signal of the torque sensor(s) shall be measured. For the measurement the sensor(s) shall be installed in the test rig. The drivetrain of the test rig (input & output) shall be free of load. The measured signal deviation from zero shall be compensated.

3.1.6.2. Speed range:

The torque loss shall be measured for the following speed steps (speed of the input shaft): 600, 900, 1 200, 1 600, 2 000, 2 500, 3 000, [...] rpm up to the maximum speed per gear according to the specifications of the transmission or the last speed step before the defined maximum speed.

The speed ramp (time for the change between two speed steps) shall not extend 20 seconds.

3.1.6.3. Measurement sequence:

3.1.6.3.1. If the transmission is equipped with smart lubrication systems and/or transmission electric auxiliaries, the measurement shall be conducted with two measurement settings of of these systems:

A first measurement sequence (3.1.6.3.2. to 3.1.6.3.4.) shall be performed with the lowest power consumption by hydraulic and electrical systems when operated in the vehicle (low loss level).

The second measurement sequence shall be performed with the systems set to work with the highest possible power consumption when operated in the vehicle (high loss level).

3.1.6.3.2. The measurements shall be performed beginning with the lowest up to the highest speed.

3.1.6.3.3. For each speed step a minimum of 5 seconds stabilization time within the temperature limits defined in 3.1.2.5 is required. If needed, the stabilization time may be extended by the manufacturer to maximum 60 seconds. Oil and ambient temperatures shall be recorded during the stabilization.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

3.1.6.3.4. After the stabilization time, the measurement signals listed in 3.1.5. shall be recorded for the test point for 05-15 seconds.

3.1.6.3.5. Each measurement shall be performed two times per measurement setting.

3.1.7. Measurement validation

3.1.7.1. The arithmetic mean values of torque, speed, (if applicable) voltage and current for the 05-15 seconds measurement shall be calculated for each of the measurements.

3.1.7.2. The averaged speed deviation shall be below ± 5 rpm of the speed set point for each measured point for the complete torque loss series.

3.1.7.3. The mechanical torque losses and (if applicable) electrical power consumption shall be calculated for each of the measurements as followed:

$$T_{loss} = T_{in}$$

$$P_{el} = I * U$$

It is allowed to subtract influences caused by the test rig setup from the torque losses (3.1.2.2.).

3.1.7.4. The mechanical torque losses and (if applicable) electrical power consumption from the two sets shall be averaged (arithmetic mean values).

3.1.7.5. The deviation between the averaged torque losses of the two measurement points for each setting shall be below ± 5 % of the average or ± 1 Nm, whichever value is larger. Then, the arithmetic average of the two averaged power values shall be taken.

3.1.7.6. If the deviation is higher, the largest averaged torque loss value shall be taken or the test shall be repeated for the gear.

3.1.7.7. The deviation between the averaged electric power consumption (voltage * current) values of the two measurements for each measurement setting shall be below ± 10 % of the average or ± 5 W, whichever value is larger. Then, the arithmetic average of the two averaged power values shall be taken.

3.1.7.8. If the deviation is higher, the set of averaged voltage and current values giving the largest averaged power consumption shall be taken, or the test shall be repeated for the gear.

3.1.8. Measurement uncertainty

The part of the calculated total uncertainty $U_{T,loss}$ exceeding 0,3 Nm shall be added to T_{loss} for the reported torque loss $T_{loss,rep}$. If $U_{T,loss}$ is smaller than 0,3 Nm, then $T_{loss,rep} = T_{loss}$.

$$T_{loss,rep} = T_{loss} + MAX(0, (U_{T,loss} - 0,3 Nm))$$

The total uncertainty $U_{T,loss}$ of the torque loss shall be calculated based on the following parameters:

- (1) Temperature effect
- (2) Parasitic loads
- (3) Calibration error (incl. sensitivity tolerance, linearity, hysteresis and repeatability)

The total uncertainty of the torque loss ($U_{T,loss}$) is based on the uncertainties of the sensors at 95 % confidence level. The calculation shall be done as the square root of the sum of squares ('Gaussian law of error propagation').

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

$$U_{T,loss} = U_{T,in} = 2 \times \sqrt{u_{TKC}^2 + u_{TK0}^2 + u_{cal}^2 + u_{para}^2}$$

$$u_{TKC} = \frac{1}{\sqrt{3}} \times \frac{w_{tkc}}{K_{ref}} \times \Delta K \times T_c$$

$$u_{TK0} = \frac{1}{\sqrt{3}} \times \frac{w_{tk0}}{K_{ref}} \times \Delta K \times T_n$$

$$u_{cal} = 1 \times \frac{W_{cal}}{k_{cal}} \times T_n$$

$$u_{para} = \frac{1}{\sqrt{3}} \times w_{para} \times T_n$$

$$w_{para} = sens_{para} * i_{para}$$

where:


| | |
|----------------|--|
| T_{loss} | = Measured torque loss (uncorrected) [Nm] |
| $T_{loss,rep}$ | = Reported torque loss (after uncertainty correction) [Nm] |
| $U_{T,loss}$ | = Total expanded uncertainty of torque loss measurement at 95 % confidence level [Nm] |
| $U_{T,in}$ | = Uncertainty of input torque loss measurement [Nm] |
| u_{TKC} | = Uncertainty by temperature influence on current torque signal [Nm] |
| w_{tkc} | = Temperature influence on current torque signal per K_{ref} , declared by sensor manufacturer [%] |
| u_{TK0} | = Uncertainty by temperature influence on zero torque signal (related to nominal torque) [Nm] |
| w_{tk0} | = Temperature influence on zero torque signal per K_{ref} (related to nominal torque), declared by sensor manufacturer [%] |
| K_{ref} | = Reference temperature span for u_{TKC} and u_{TK0} , w_{tk0} and w_{tkc} , declared by sensor manufacturer [K] |
| ΔK | = Difference in sensor temperature between calibration and measurement [K]. If the sensor temperature cannot be measured, a default value of $\Delta K = 15$ K shall be used. |
| T_c | = Current/measured torque value at torque sensor [Nm] |
| T_n | = Nominal torque value of torque sensor [Nm] |
| u_{cal} | = Uncertainty by torque sensor calibration [Nm] |
| W_{cal} | = Relative calibration uncertainty (related to nominal torque) [%] |
| k_{cal} | = Calibration advancement factor (if declared by sensor manufacturer, otherwise = 1) |
| u_{para} | = Uncertainty by parasitic loads [Nm] |
| w_{para} | = $sens_{para} * i_{para}$ |
| | Relative influence of forces and bending torques caused by misalignment |
| $sens_{para}$ | = Maximum influence of parasitic loads for specific torque sensor declared by sensor manufacturer [%]; if no specific value for parasitic loads is declared by the sensor manufacturer, the value shall be set to 1,0 % |
| i_{para} | = Maximum influence of parasitic loads for specific torque sensor depending on test setup (A/B/C, as defined below). = A) 10 % in case of bearings isolating the parasitic forces in front of and behind the sensor and a flexible coupling (or cardan shaft) installed functionally next to the sensor (downstream or upstream); furthermore, these bearings can be integrated in a driving/braking machine (e.g. electric machine) and/or in the transmission as long as the forces in the machine and/or transmission are isolated from the sensor. See figure 1. |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Figure 1

Test setup A for Option 1
Test setup A

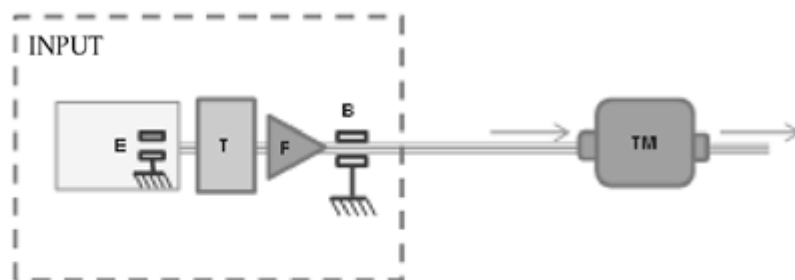

E: Electric machine

T: Torque sensor

F: Flexible coupling

B: Bearing

TM: Transmission

- = **B)** 50 % in case of bearings isolating the parasitic forces in front of and behind the sensor and no flexible coupling installed functionally next to the sensor; furthermore, these bearings can be integrated in a driving/braking machine (e.g. electric machine) and/or in the transmission as long as the forces in the machine and/or transmission are isolated from the sensor. See figure 2.


Figure 2

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Test setup B for Option 1

Test setup B

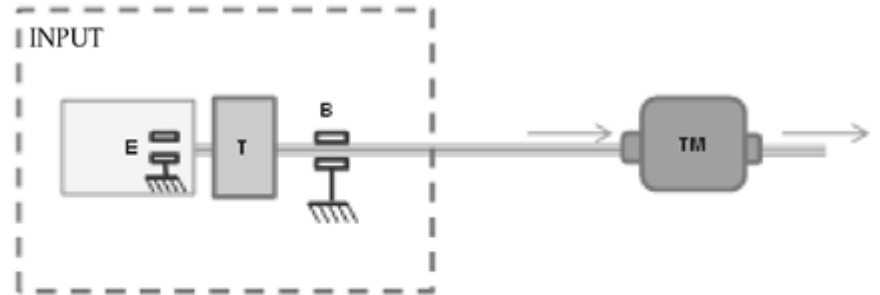

E: Electric machine

T: Torque sensor

B: Bearing

TM: Transmission

= C) 100 % for other setups

- 3.2. Option 2: Measurement of the torque independent losses, measurement of the torque loss at maximum torque and interpolation of the torque dependent losses based on a linear model

Option 2 describes the determination of the torque loss by a combination of measurements and linear interpolation. Measurements shall be performed for the torque independent losses of the transmission and for one load point of the torque dependent losses (maximum input torque). Based on the torque losses at no load and at maximum input torque, the torque losses for the input torques in between shall be calculated with the torque loss coefficient f_{Tlimo} .

The torque loss $T_{l,in}$ on the input shaft of the transmission shall be calculated by

$$T_{l,in}(n_{in}, T_{in}, gear) = T_{l,in,min_loss} + f_{Tlimo} * T_{in} + T_{l,in,min_el} + f_{el_corr} * T_{in}$$

The torque loss coefficient based on the linear model f_{Tlimo} shall be calculated by

$$f_{Tlimo} = \frac{T_{l,maxT} - T_{l,in,min_loss}}{T_{in,maxT}}$$

where:

| | |
|----------------------|---|
| $T_{l,in}$ | = Torque loss related to input shaft [Nm] |
| T_{l,in,min_loss} | = Drag torque loss at transmission input, measured with free rotating output shaft from testing without load [Nm] |
| n_{in} | = Speed at the input shaft [rpm] |
| f_{Tlimo} | = Torque loss coefficient based on linear model [-] |
| T_{in} | = Torque at the input shaft [Nm] |
| $T_{in,maxT}$ | = Maximum tested torque at the input shaft (normally 100 % input torque, refer to 3.2.5.2. and 3.4.4.) [Nm] |
| $T_{l,maxT}$ | = Torque loss related to input shaft with $T_{in} = T_{in,maxT}$ |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | |
|--------------------|--|
| f_{el_corr} | = Loss correction for electric power loss level depending on input torque [-] |
| $T_{l,in,el}$ | = Additional torque loss on input shaft by electric consumers [Nm] |
| T_{l,in,min_el} | = Additional torque loss on input shaft by electric consumers corresponding to minimum electric power [Nm] |

The correction factor for the torque dependent electric torque losses f_{el_corr} and the torque loss at the input shaft of the transmission caused by the power consumption of transmission electric auxiliary $T_{l,in,el}$ shall be calculated as described in paragraph 3.1.

3.2.1. The torque losses shall be measured in accordance with the procedure described in the following.

3.2.1.1. General requirements:

As specified for Option 1 in 3.1.2.1.

3.2.1.2. Differential measurements:

As specified for Option 1 in 3.1.2.2.

3.2.1.3. Run-in

As specified for Option 1 in 3.1.2.3.

3.2.1.4. Pre-conditioning

As specified for Option 3 in 3.3.2.1.

3.2.1.5. Test conditions

3.2.1.5.1. Ambient temperature

As specified for Option 1 in 3.1.2.5.1.

3.2.1.5.2. Oil temperature

As specified for Option 1 in 3.1.2.5.2.

3.2.1.5.3. Oil quality / Oil viscosity

As specified for Option 1 in 3.1.2.5.3 and 3.1.2.5.4.

3.2.1.5.4. Oil level and conditioning

As specified for Option 3 in 3.3.3.4.

3.2.2. Installation

As specified for Option 1 in 3.1.3. for the measurement of the torque independent losses.

As specified for Option 3 in 3.3.4. for the measurement of the torque dependent losses.

3.2.3. Measurement equipment

As specified for Option 1 in 3.1.4. for the measurement of the torque independent losses.

As specified for Option 3 in 3.3.5. for the measurement of the torque dependent losses.

3.2.4. Measurement signals and data recording

As specified for Option 1 in 3.1.5 for the measurement of the torque independent losses.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

As specified for Option 3 in 3.3.7 for the measurement of the torque dependent losses.

3.2.5. Test procedure

The torque loss map to be applied to the simulation tool contains the torque loss values of a transmission depending on rotational input speed and input torque.

To determine the torque loss map for a transmission, the basic torque loss map data shall be measured and calculated as specified in this paragraph. The torque loss results shall be complemented in accordance with 3.4 and formatted in accordance with Appendix 12 for the further processing by the simulation tool.

3.2.5.1. The torque independent losses shall be determined by the procedure described in 3.1.1. for the torque independent losses for Option 1 only for the low loss level setting of electric and hydraulic consumers.

3.2.5.2. Determine the torque dependent losses for each of the gears using the procedure described for Option 3 in 3.3.6., diverging in the applicable torque range:

Torque range:

The torque losses for each gear shall be measured at 100 % of the maximum transmission input torque per gear.

In the case the output torque exceeds 10 kNm (for a theoretical loss free transmission) or the input power exceeds the specified maximum input power, point 3.4.4. shall apply.

3.2.6. Measurement validation

As specified for Option 3 in 3.3.8.

3.2.7. Measurement uncertainty

As specified for Option 1 in 3.1.8. for the measurement of the torque independent losses.

As specified for Option 3 in 3.3.9. for the measurement of the torque dependent loss.

3.3. Option 3: Measurement of the total torque loss.

Option 3 describes the determination of the torque loss by full measurement of the torque dependent losses including the torque independent losses of the transmission.

3.3.1. General requirements

As specified for Option 1 in 3.1.2.1.

3.3.1.1 Differential measurements:

As specified for Option 1 in 3.1.2.2.

3.3.2. Run-in

As specified for Option 1 in 3.1.2.3.

3.3.2.1 Pre-conditioning

As specified for Option 1 in 3.1.2.4. with an exception for the following:

The pre-conditioning shall be performed on the direct drive gear without applied torque to the output shaft or target torque on the output shaft set to zero. If the

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

transmission is not equipped with a direct drive gear, the gear with the ratio closest to 1:1 shall be used.

or

The requirements as specified in 3.1.2.4. shall apply, with an exception for the following:

The pre-conditioning shall be performed on the direct drive gear without applied torque to the output shaft or the torque on the output shaft being within +/- 50 Nm. If the transmission is not equipped with a direct drive gear, the gear with the ratio closest to 1:1 shall be used.

or, if the test rig includes a (master friction) clutch at the input shaft:

The requirements as specified in 3.1.2.4. shall apply, with an exception for the following:

The pre-conditioning shall be performed on the direct drive gear without applied torque to the output shaft or without applied torque to the input shaft. If the transmission is not equipped with a direct drive gear, the gear with the ratio closest to 1:1 shall be used.

The transmission would then be driven from the output side. Those proposals could also be combined.

3.3.3. Test conditions

3.3.3.1. Ambient temperature

As specified for Option 1 in 3.1.2.5.1.

3.3.3.2. Oil temperature

As specified for Option 1 in 3.1.2.5.2.

3.3.3.3. Oil quality / Oil viscosity

As specified for Option 1 in 3.1.2.5.3 and 3.1.2.5.4.

3.3.3.4. Oil level and conditioning

The requirements as specified in 3.1.2.5.5. shall apply, diverging in the following:

The test point for the external oil conditioning system is specified as follows:

- (1) highest indirect gear,
- (2) input speed = 1 600 rpm,
- (3) input torque = maximum input torque for the highest indirect gear

3.3.4. Installation

The test rig shall be driven by electric machines (input and output).

Torque sensors shall be installed at the input and output side of the transmission.

Other requirements as specified in 3.1.3. shall apply.

3.3.5. Measurement equipment

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

For the measurement of the torque independent losses, the measurement equipment requirements as specified for Option 1 in 3.1.4. shall apply.

For the measurement of the torque dependent losses, the following requirements shall apply:

The torque sensor measurement uncertainty shall be below 5 % of the measured torque loss or 1 Nm (whichever value is larger).

The use of torque sensors with higher measurement uncertainties is allowed if the parts of the uncertainty exceeding 5 % or 1 Nm can be calculated and the smaller of those parts is added to the measured torque loss.

The torque measurement uncertainty shall be calculated and included as described under 3.3.9.

Other measurement equipment requirements as specified for Option 1 in 3.1.4. shall apply.

3.3.6. Test procedure

3.3.6.1. Zero torque signal compensation:

As specified in 3.1.6.1.

3.3.6.2. Speed range

The torque loss shall be measured for the following speed steps (speed of the input shaft): 600, 900, 1 200, 1 600, 2 000, 2 500, 3 000, [...] rpm up to the maximum speed per gear according to the specifications of the transmission or the last speed step before the defined maximum speed.

The speed ramp (time for the change between two speed steps) shall not exceed 20 seconds.

3.3.6.3. Torque range

For each speed step the torque loss shall be measured for the following input torques: 0 (free rotating output shaft), 200, 400, 600, 900, 1 200, 1 600, 2 000, 2 500, 3 000, 3 500, 4 000, [...] Nm up to the maximum input torque per gear according to the specifications of the transmission or the last torque step before the defined maximum torque and/or the last torque step before the output torque of 10 kNm.

In the case the output torque exceeds 10 kNm (for a theoretical loss free transmission) or the input power exceeds the specified maximum input power, point 3.4.4. shall apply.

The torque ramp (time for the change between two torque steps) shall not exceed 15 seconds (180 seconds for option 2).

To cover the complete torque range of a transmission in the above defined map, different torque sensors with limited measurement ranges may be used on the input/output side. Therefore the measurement may be divided into sections using the same set of torque sensors. The overall torque loss map shall be composed of these measurement sections.

3.3.6.4. Measurement sequence

3.3.6.4.1. The measurements shall be performed beginning with the lowest up to the highest speed.

3.3.6.4.2. The input torque shall be varied according to the above defined torque steps from the lowest to the highest torque which is covered by the current torque sensors for each speed step.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

3.3.6.4.3. For each speed and torque step a minimum of 5 seconds stabilization time within the temperature limits defined in 3.3.3. is required. If needed, the stabilization time may be extended by the manufacturer to maximum 60 seconds (maximum 180 seconds for option 2). Oil and ambient temperatures shall be recorded during the stabilization.

3.3.6.4.4. The measurement set shall be performed two times in total. For that purpose, sequenced repetition of sections using the same set of torque sensors is allowed.

3.3.7. Measurement signals and data recording

At least the following signals shall be recorded during the measurement:

- (1) Input and output torques [Nm]
- (2) Input and output rotational speeds [rpm]
- (3) Ambient temperature [°C]
- (4) Oil temperature [°C]

If the transmission is equipped with a shift and/or clutch system that is controlled by hydraulic pressure or with a mechanically driven smart lubrication system, additionally to be recorded:

- (5) Oil pressure [kPa]

If the transmission is equipped with transmission electric auxiliary, additionally to be recorded:

- (6) Voltage of transmission electric auxiliary [V]
- (7) Current of transmission electric auxiliary [A]

For differential measurements for compensation of influences by test rig setup, additionally to be recorded:

- (8) Test rig bearing temperature [°C]

The sampling and recording rate shall be 100 Hz or higher.

A low pass filter shall be applied to avoid measurement errors.

3.3.8. Measurement validation

3.3.8.1. The arithmetic mean values of torque, speed, if applicable voltage and current for the 05-15 seconds measurement shall be calculated for each of the two measurements.

3.3.8.2. The measured and averaged speed at the input shaft shall be below ± 5 rpm of the speed set point for each measured operating point for the complete torque loss series. ^[F1]The measured and averaged torque at the input shaft shall be below ± 5 Nm or $\pm 0,5$ % of the torque set point whichever value is larger for each measured operating point for the complete torque loss series.]

3.3.8.3. The mechanical torque losses and (if applicable) electrical power consumption shall be calculated for each of the measurements as followed:

$$T_{loss} = T_{in} - \frac{T_{out}}{i_{gear}}$$
$$P_{el} = I * U$$

It is allowed to subtract influences caused by the test rig setup from the torque losses (3.3.2.2.).

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 3.3.8.4. The mechanical torque losses and (if applicable) electrical power consumption from the two sets shall be averaged (arithmetic mean values).
- 3.3.8.5. The deviation between the averaged torque losses of the two measurement sets shall be below $\pm 5\%$ of the average or ± 1 Nm (whichever value is larger). The arithmetic average of the two averaged torque loss values shall be taken. If the deviation is higher, the largest averaged torque loss value shall be taken or the test shall be repeated for the gear.
- 3.3.8.6. The deviation between the averaged electric power consumption (voltage*current) values of the two measurement sets shall be below $\pm 10\%$ of the average or ± 5 W, whichever value is larger. Then, the arithmetic average of the two averaged power values shall be taken.
- 3.3.8.7. If the deviation is higher, the set of averaged voltage and current values giving the largest averaged power consumption shall be taken, or the test shall be repeated for the gear.
- 3.3.9. Measurement uncertainty

The part of the calculated total uncertainty $U_{T,loss}$ exceeding 5% of T_{loss} or 1 Nm ($\Delta U_{T,loss}$), whichever value of $\Delta U_{T,loss}$ is smaller, shall be added to T_{loss} for the reported torque loss $T_{loss,rep}$. If $U_{T,loss}$ is smaller than 5% of T_{loss} or 1 Nm, then $T_{loss,rep} = T_{loss}$.

$$T_{loss,rep} = T_{loss} + \text{MAX}(0, \Delta U_{T,loss})$$

$$\Delta U_{T,loss} = \text{MIN}((U_{T,loss} - 5\% * T_{loss}), (U_{T,loss} - 1 \text{ Nm}))$$

For each measurement set, the total uncertainty $U_{T,loss}$ of the torque loss shall be calculated based on the following parameters:

- (1) Temperature effect
- (2) Parasitic loads
- (3) Calibration error (incl. sensitivity tolerance, linearity, hysteresis and repeatability)

The total uncertainty of the torque loss ($U_{T,loss}$) is based on the uncertainties of the sensors at 95% confidence level. The calculation shall be done as the square root of the sum of squares ('Gaussian law of error propagation').

$$U_{T,loss} = \sqrt{U_{T,in}^2 + \left(\frac{U_{T,out}}{i_{para}}\right)^2}$$

$$U_{T,in/out} = 2 \times \sqrt{u_{TKC}^2 + u_{TK0}^2 + u_{Cal}^2 + u_{para}^2}$$

$$u_{TKC} = \frac{1}{\sqrt{3}} \times \frac{w_{tkc}}{K_{ref}} \times \Delta K \times T_c$$

$$u_{TK0} = \frac{1}{\sqrt{3}} \times \frac{w_{tk0}}{K_{ref}} \times \Delta K \times T_n$$

$$u_{Cal} = 1 \times \frac{W_{out}}{k_{out}} \times T_n$$

$$u_{para} = \frac{1}{\sqrt{3}} \times w_{para} \times T_n$$

$$w_{para} = \text{SENS}_{para} * i_{para}$$

where:

T_{loss} = Measured torque loss (uncorrected) [Nm]

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | |
|-----------------------------|---|--|
| $T_{\text{loss,rep}}$ | = | Reported torque loss (after uncertainty correction) [Nm] |
| $U_{T,\text{loss}}$ | = | Total expanded uncertainty of torque loss measurement at 95 % confidence level [Nm] |
| $u_{T,\text{in/out}}$ | = | Uncertainty of input/output torque loss measurement separately for input and output torque sensor [Nm] |
| i_{gear} | = | Gear ratio [-] |
| u_{TKC} | = | Uncertainty by temperature influence on current torque signal [Nm] |
| w_{tkc} | = | Temperature influence on current torque signal per K_{ref} , declared by sensor manufacturer [%] |
| u_{TK0} | = | Uncertainty by temperature influence on zero torque signal (related to nominal torque) [Nm] |
| w_{tk0} | = | Temperature influence on zero torque signal per K_{ref} (related to nominal torque), declared by sensor manufacturer [%] |
| K_{ref} | = | Reference temperature span for u_{TKC} and u_{TK0} , w_{tk0} and w_{tkc} , declared by sensor manufacturer [K] |
| ΔK | = | Difference in sensor temperature between calibration and measurement [K]. If the sensor temperature cannot be measured, a default value of $\Delta K = 15$ K shall be used. |
| T_c | = | Current/measured torque value at torque sensor [Nm] |
| T_n | = | Nominal torque value of torque sensor [Nm] |
| u_{cal} | = | Uncertainty by torque sensor calibration [Nm] |
| w_{cal} | = | Relative calibration uncertainty (related to nominal torque) [%] |
| k_{cal} | = | calibration advancement factor (if declared by sensor manufacturer, otherwise = 1) |
| u_{para} | = | Uncertainty by parasitic loads [Nm] |
| w_{para} | = | $\text{sens}_{\text{para}} * i_{\text{para}}$ |
| | | Relative influence of forces and bending torques caused by misalignment [%] |
| $\text{sens}_{\text{para}}$ | = | Maximum influence of parasitic loads for specific torque sensor declared by sensor manufacturer [%]; if no specific value for parasitic loads is declared by the sensor manufacturer, the value shall be set to 1,0 % |
| i_{para} | = | Maximum influence of parasitic loads for specific torque sensor depending on test setup (A/B/C, as defined below). |
| | = | A) 10 % in case of bearings isolating the parasitic forces in front of and behind the sensor and a flexible coupling (or cardan shaft) installed functionally next to the sensor (downstream or upstream); furthermore, these bearings can be integrated in a driving/braking machine (e.g. electric machine) and/or in the transmission as long as the forces in the machine and/or transmission are isolated from the sensor. See figure 3. |


Figure 3

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Test setup A for Option 3

Test setup A

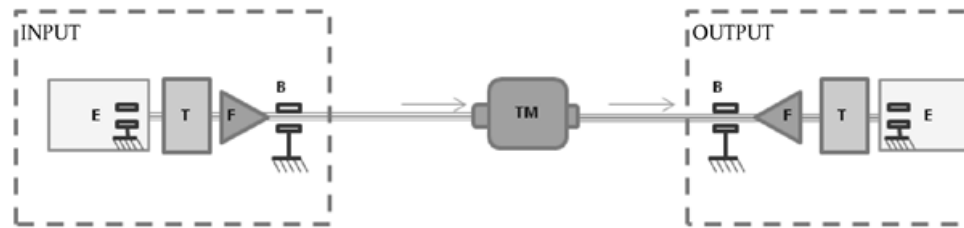

E: Electric machine

T: Torque sensor

F: Flexible coupling

B: Bearing


TM: Transmission

= **B)** 50 % in case of bearings isolating the parasitic forces in front of and behind the sensor and no flexible coupling installed functionally next to the sensor; furthermore, these bearings can be integrated in a driving/braking machine (e.g. electric machine) and/or in the transmission as long as the forces in the machine and/or transmission are isolated from the sensor. See figure 4.

Figure 4

Test setup B for Option 3

Test setup B

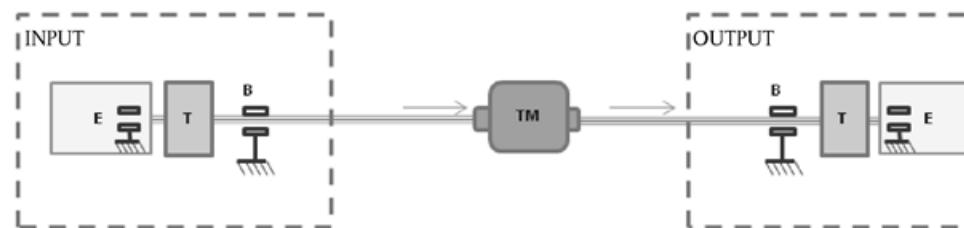

E: Electric machine

T: Torque sensor

B: Bearing

TM: Transmission

= **C)** 100 % for other setups

3.4. Complement of input files for the simulation tool

For each gear a torque loss map covering the defined input speed and input torque steps shall be determined with one of the specified testing options or standard torque loss values. For the

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

input file for the simulation tool, this basic torque loss map shall be complemented as described in the following:

- 3.4.1. In the cases the highest tested input speed was the last speed step below the defined maximum permissible transmission speed, an extrapolation of the torque loss shall be applied up to the maximum speed with linear regression based on the two last measured speed steps.
- 3.4.2. In the cases the highest tested input torque was the last torque step below the defined maximum permissible transmission torque, an extrapolation of the torque loss shall be applied up to the maximum torque with linear regression based on the two last measured torque steps for the corresponding speed step. In order to handle engine torque tolerances, etc., the simulation tool will, if required, perform an extrapolation of the torque loss for input torques up to 10 % above said defined maximum permissible transmission torque.
- 3.4.3. In the case of extrapolation of the torque loss values for maximum input speed and maximum input torque at the same time, the torque loss for the combined point of highest speed and highest torque shall be calculated with two-dimensional linear extrapolation.
- 3.4.4. If the maximum output torque exceeds 10 kNm (for a theoretical loss free transmission), and/or for all speed and torque points with input power higher than the specified maximum input power, the manufacturer may choose to take the torque loss values for all torques higher than 10 kNm, and/or for all speed and torque points with input power higher than the specified maximum input power, respectively, from one of:
 - (1) Calculated fallback values (Appendix 8)
 - (2) Option 1
 - (3) Option 2 or 3 in combination with a torque sensor for higher output torques (if required)

For cases (i) and (ii) in Option 2, the torque losses at load shall be measured at the input torque that corresponds to output torque 10 kNm and/or the specified maximum input power.

- 3.4.5. For speeds below the defined minimum speed and the additional input speed step of 0 rpm, the reported torque losses determined for the minimum speed step shall be copied.
- 3.4.6. To cover the range of negative input torques during vehicle coasting conditions, the torque loss values for positive input torques shall be copied for the related negative input torques.
- 3.4.7. Upon agreement of an approval authority, the torque losses for the input speeds below 1 000 rpm may be replaced by the torque losses at 1 000 rpm when the measurement is technically not possible.
- 3.4.8. If the measurement of speed points is technically not possible (e.g. due to natural frequency), the manufacturer may, in agreement with the approval authority, calculate the torque losses by interpolation or extrapolation (limited to max. 1 speed step per gear).
- 3.4.9. The torque loss map data shall be formatted and saved as specified in Appendix 12 to this Annex.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

4. Torque converter (TC)

The torque converter characteristics to be determined for the simulation tool input consist of $T_{pum1000}$ (the reference torque at 1 000 rpm input speed) and μ (the torque ratio of the torque converter). Both are depending on the speed ratio ν (= output (turbine) speed / input (pump) speed for the torque converter) of the torque converter.

For determination of the characteristics of the TC, the applicant for a certificate shall apply the following method, irrespective of the chosen option for the assessment of the transmission torque losses.

To take the two possible arrangements of the TC and the mechanical transmission parts into account, the following differentiation between case S and P shall apply:

Case S : TC and mechanical transmission parts in serial arrangement
 Case P : TC and mechanical transmission parts in parallel arrangement (power split installation)

For case S arrangements the TC characteristics may be evaluated either separate from the mechanical transmission or in combination with the mechanical transmission. For case P arrangements the evaluation of TC characteristic is only possible in combination with the mechanical transmission. However, in this case and for the hydromechanical gears subject to measurement the whole arrangement, torque converter and mechanical transmission, is considered as a TC with similar characteristic curves as a sole torque converter.

For the determination of the torque converter characteristics two measurement options may be applied:

- (i) Option A: measurement at constant input speed
- (ii) Option B: measurement at constant input torque according to SAE J643

The manufacturer may choose option A or B for case S and case P arrangements.

For the input to the simulation tool, the torque ratio μ and reference torque T_{pum} of the torque converter shall be measured for a range of $\nu \leq 0,95$ (= vehicle propulsion mode). The range of $\nu \geq 1,00$ (= vehicle coasting mode) may either be measured or covered by using the standard values of Table 1.

In case of measurements together with a mechanical transmission the overrun point may be different from $\nu = 1,00$ and therefor the range of measured speed ratios shall be adjusted accordingly.

In case of use of standard values the data on torque converter characteristics provided to the simulation tool shall only cover the range of $\nu \leq 0,95$ (or the adjusted speed ratio). The simulation tool automatically adds the standard values for overrun conditions.

TABLE 1

Default values for $\nu \geq 1,00$

| ν | μ | $T_{pum1000}$ |
|-------|--------|---------------|
| 1,000 | 1,0000 | 0,00 |
| 1,100 | 0,9999 | - 40,34 |
| 1,222 | 0,9998 | - 80,34 |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | |
|-------|--------|-----------|
| 1,375 | 0,9997 | – 136,11 |
| 1,571 | 0,9996 | – 216,52 |
| 1,833 | 0,9995 | – 335,19 |
| 2,200 | 0,9994 | – 528,77 |
| 2,500 | 0,9993 | – 721,00 |
| 3,000 | 0,9992 | – 1 122,0 |
| 3,500 | 0,9991 | – 1 648,0 |
| 4,000 | 0,9990 | – 2 326,0 |
| 4,500 | 0,9989 | – 3 182,0 |
| 5,000 | 0,9988 | – 4 242,0 |

4.1. Option A: Measured torque converter characteristics at constant speed

4.1.1. General requirements

The torque converter used for the measurements shall be in accordance with the drawing specifications for series production torque converters.

Modifications to the TC to meet the testing requirements of this Annex, e.g. for the inclusion of measurement sensors are permitted.

Upon request of the approval authority the applicant for a certificate shall specify and prove the conformity with the requirements defined in this Annex.

4.1.2. Oil temperature

The input oil temperature to the TC shall meet the following requirements:

The oil temperature for measurements of the TC separate from the transmission shall be $90\text{ °C} + 7/- 3\text{ K}$.

The oil temperature for measurements of the TC together with the transmission (case S and case P) shall be $90\text{ °C} + 20/- 3\text{ K}$.

The oil temperature shall be measured at the drain plug or in the oil sump.

In case the TC characteristics are measured separately from the transmission, the oil temperature shall be measured prior to entering the converter test drum/bench.

4.1.3. Oil flow rate and pressure

The input TC oil flow rate and output oil pressure of the TC shall be kept within the specified operational limits for the torque converter, depending on the related transmission type and the tested maximum input speed.

4.1.4. Oil quality/Oil viscosity

As specified for transmission testing in 3.1.2.5.3 and 3.1.2.5.4.

4.1.5. Installation

The torque converter shall be installed on a testbed with a torque sensor, speed sensor and an electric machine installed at the input and output shaft of the TC.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

4.1.6. Measurement equipment

The calibration laboratory facilities shall comply with the requirements of either ISO/TS 16949, ISO 9000 series or ISO/IEC 17025. All laboratory reference measurement equipment, used for calibration and/or verification, shall be traceable to national (international) standards.

4.1.6.1. Torque

The torque sensor measurement uncertainty shall be below 1 % of the measured torque value.

The use of torque sensors with higher measurement uncertainties is allowed if the part of the uncertainty exceeding 1 % of the measured torque can be calculated and is added to the measured torque loss as described in 4.1.7.

4.1.6.2. Speed

The uncertainty of the speed sensors shall not exceed ± 1 rpm.

4.1.6.3. Temperature

The uncertainty of the temperature sensors for the measurement of the ambient temperature shall not exceed $\pm 1,5$ K.

The uncertainty of the temperature sensors for the measurement of the oil temperature shall not exceed $\pm 1,5$ K.

4.1.7. Test procedure

4.1.7.1. Zero torque signal compensation

As specified in 3.1.6.1.

4.1.7.2. Measurement sequence

4.1.7.2.1. The input speed n_{pum} of the TC shall be fixed to a constant speed within the range of:

$$1\ 000\ \text{rpm} \leq n_{pum} \leq 2\ 000\ \text{rpm}$$

4.1.7.2.2. The speed ratio ν shall be adjusted by increasing the output speed n_{tur} from 0 rpm up to the set value of n_{pum} .

4.1.7.2.3. The step width shall be 0,1 for the speed ratio range of 0 to 0,6 and 0,05 for the range of 0,6 to 0,95.

4.1.7.2.4. The upper limit of the speed ratio may be limited to a value below 0,95 by the manufacturer. In this case at least seven evenly distributed points between $\nu = 0$ and a value of $\nu < 0,95$ have to be covered by the measurement.

4.1.7.2.5. For each step a minimum of 3 seconds stabilization time within the temperature limits defined in 4.1.2. is required. If needed, the stabilization time may be extended by the manufacturer to maximum 60 seconds. The oil temperature shall be recorded during the stabilization.

4.1.7.2.6. For each step the signals specified in 4.1.8. shall be recorded for the test point for 3-15 seconds.

4.1.7.2.7. The measurement sequence (4.1.7.2.1. to 4.1.7.2.6.) shall be performed two times in total.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

4.1.8. Measurement signals and data recording

At least the following signals shall be recorded during the measurement:

- (1) Input (pump) torque $T_{c,pum}$ [Nm]
- (2) Output (turbine) torque $T_{c,tur}$ [Nm]
- (3) Input rotational (pump) speed n_{pum} [rpm]
- (4) Output rotational (turbine) speed n_{tur} [rpm]
- (5) TC input oil temperature K_{TCin} [°C]

The sampling and recording rate shall be 100 Hz or higher.

A low pass filter shall be applied to avoid measurement errors.

4.1.9. Measurement validation

4.1.9.1. The arithmetic mean values of torque and speed for the 03-15 seconds measurement shall be calculated for each of the two measurements.

4.1.9.2. The measured torques and speeds from the two sets shall be averaged (arithmetic mean values).

4.1.9.3. The deviation between the averaged torque of the two measurement sets shall be below $\pm 5\%$ of the average or ± 1 Nm (whichever value is larger). The arithmetic average of the two averaged torque values shall be taken. If the deviation is higher, the following value shall be taken for point 4.1.10. and 4.1.11. or the test shall be repeated for the TC.

- for the calculation of $\Delta U_{T,pum/tur}$: smallest averaged torque value for $T_{c,pum/tur}$
- for the calculation of torque ratio μ : largest averaged torque value for $T_{c,pum}$
- for the calculation of torque ratio μ : smallest averaged torque value for $T_{c,tur}$
- for the calculation of reference torque $T_{pum1000}$: smallest averaged torque value for $T_{c,pum}$

4.1.9.4. The measured and averaged speed and torque at the input shaft shall be below ± 5 rpm and ± 5 Nm of the speed and torque set point for each measured operating point for the complete speed ratio series.

4.1.10. Measurement uncertainty

The part of the calculated measurement uncertainty $U_{T,pum/tur}$ exceeding 1 % of the measured torque $T_{c,pum/tur}$ shall be used to correct the characteristic value of the TC as defined below.

$$\Delta U_{T,pum/tur} = \text{MAX} (0, (U_{T,pum/tur} - 0,01 * T_{c,pum/tur}))$$

The uncertainty $U_{T,pum/tur}$ of the torque measurement shall be calculated based on the following parameter:

- (i) Calibration error (incl. sensitivity tolerance, linearity, hysteresis and repeatability)

The uncertainty $U_{T,pum/tur}$ of the torque measurement is based on the uncertainties of the sensors at 95 % confidence level.

$$U_{T,pum/tur} = 2 * u_{cal}$$

$$u_{cal} = 1 * \frac{W_{cal}}{k_{cal}} * T_n$$

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

where:

| | |
|-----------------|--|
| $T_{c,pum/tur}$ | = Current / measured torque value at input/output torque sensor (uncorrected) [Nm] |
| T_{pum} | = Input (pump) torque (after uncertainty correction) [Nm] |
| $U_{T,pum/tur}$ | = Uncertainty of input / output torque measurement at 95 % confidence level separately for input and output torque sensor [Nm] |
| T_n | = Nominal torque value of torque sensor [Nm] |
| u_{cal} | = Uncertainty by torque sensor calibration [Nm] |
| W_{cal} | = Relative calibration uncertainty (related to nominal torque) [%] |
| k_{cal} | = Calibration advancement factor (if declared by sensor manufacturer, otherwise = 1) |

4.1.11. Calculation of TC characteristics

For each measurement point, the following calculations shall be applied to the measurement data:

The torque ratio of the TC shall be calculated by

$$\mu = \frac{T_{c,tur} - \Delta U_{T,tur}}{T_{c,pum} + \Delta U_{T,pum}}$$

The speed ratio of the TC shall be calculated by

$$v = \frac{n_{tur}}{n_{pum}}$$

The reference torque at 1 000 rpm shall be calculated by

$$T_{pum1000} = (T_{c,pum} - \Delta U_{T,pum}) \times \left(\frac{1000 \text{ rpm}}{n_{pum}} \right)^2$$

where:

| | |
|---------------|---|
| μ | = Torque ratio of the TC [-] |
| v | = Speed ratio of the TC [-] |
| $T_{c,pum}$ | = Input (pump) torque (corrected) [Nm] |
| n_{pum} | = Input rotational (pump) speed [rpm] |
| n_{tur} | = Output rotational (turbine) speed [rpm] |
| $T_{pum1000}$ | = Reference torque at 1 000 rpm [Nm] |

4.2. Option B: Measurement at constant input torque (in accordance with SAE J643)

4.2.1. General requirements

As specified in 4.1.1.

4.2.2. Oil temperature

As specified in 4.1.2.

4.2.3. Oil flow rate and pressure

As specified in 4.1.3.

4.2.4. Oil quality

As specified in 4.1.4.

4.2.5. Installation

As specified in 4.1.5.

4.2.6. Measurement equipment

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

As specified in 4.1.6.

4.2.7. Test procedure

4.2.7.1. Zero torque signal compensation

As specified in 3.1.6.1.

4.1.7.2. Measurement sequence

4.2.7.2.1. The input torque T_{pum} shall be set to a positive level at $n_{pum} = 1\ 000$ rpm with the output shaft of the TC held non-rotating (output speed $n_{tur} = 0$ rpm).

4.2.7.2.2. The speed ratio v shall be adjusted by increasing the output speed n_{tur} from 0 rpm up to a value of n_{tur} covering the usable range of v with at least seven evenly distributed speed points.

4.2.7.2.3. The step width shall be 0.1 for the speed ratio range of 0 to 0,6 and 0,05 for the range of 0,6 to 0,95.

4.2.7.2.4. The upper limit of the speed ratio may be limited to a value below 0,95 by the manufacturer.

4.2.7.2.5. For each step a minimum of 5 seconds stabilization time within the temperature limits defined in 4.2.2. is required. If needed, the stabilization time may be extended by the manufacturer to maximum 60 seconds. The oil temperature shall be recorded during the stabilization.

4.2.7.2.6. For each step the values specified in 4.2.8. shall be recorded for the test point for 05-15 seconds.

4.2.7.2.7. The measurement sequence (4.2.7.2.1. to 4.2.7.2.6.) shall be performed two times in total.

4.2.8. Measurement signals and data recording

As specified in 4.1.8.

4.2.9. Measurement validation

As specified in 4.1.9.

4.2.10. Measurement uncertainty

As specified in 4.1.9.

4.2.11. Calculation of TC characteristics

As specified in 4.1.11.

5. Other torque transferring components (OTTTC)

The scope of this section includes engine retarders, transmission retarders, driveline retarders, and components that are treated in the simulation tool as a retarder. These components include vehicle starting devices like a single wet transmission input clutch or hydro-dynamic clutch.

5.1. Methods for establishing retarder drag losses

The retarder drag torque loss is a function of the retarder rotor speed. Since the retarder can be integrated in different parts of the vehicle driveline, the retarder rotor speed depends on the

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

drive part (= speed reference) and step-up ratio between drive part and retarder rotor as shown in Table 2.

TABLE 2

Retarder rotor speeds

| Configuration | | Speed reference | Retarder rotor speed calculation |
|---------------|--|---------------------------------|---|
| A. | Engine Retarder | Engine Speed | $n_{retarder} = n_{engine} * i_{step-up}$ |
| B. | Transmission Input Retarder | Transmission Input Shaft Speed | $n_{retarder} = n_{transm.input} * i_{step-up}$ $= n_{transm.output} * i_{transm} * i_{step-up}$ |
| C. | Transmission Output Retarder or Propshaft Retarder | Transmission Output Shaft Speed | $n_{retarder} = n_{transm.output} * i_{step-up}$ |

where:

$i_{step-up}$ = step-up ratio = retarder rotor speed/drive part speed
 i_{transm} = transmission ratio = transmission input speed/transmission output speed

Retarder configurations that are integrated in the engine and cannot be separated from the engine shall be tested in combination with the engine. This section does not cover these non-separable engine integrated retarders.

Retarders that can be disconnected from the driveline or the engine by any kind of clutch are considered to have zero rotor speed in disconnected condition and therefore have no power losses.

The retarder drag losses shall be measured with one of the following two methods:

- (1) Measurement on the retarder as a stand-alone unit
- (2) Measurement in combination with the transmission

5.1.1. General requirements

In case the losses are measured on the retarder as stand-alone unit, the results are affected by the torque losses in the bearings of the test setup. It is permitted to measure these bearing losses and subtract them from the retarder drag loss measurements.

The manufacturer shall guarantee that the retarder used for the measurements is in accordance with the drawing specifications for series production retarders.

Modifications to the retarder to meet the testing requirements of this Annex, e.g. for the inclusion of measurement sensors or the adaption of an external oil conditioning systems are permitted.

Based on the family described in Appendix 6 to this Annex, measured drag losses for transmissions with retarder can be used for the same (equivalent) transmission without retarder.

The use of the same transmission unit for measuring the torque losses of variants with and without retarder is permitted.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Upon request of the approval authority the applicant for a certificate shall specify and prove the conformity with the requirements defined in this Annex.

5.1.2. Run-in

On request of the applicant a run-in procedure may be applied to the retarder. The following provisions shall apply for a run-in procedure.

5.1.2.1 If the manufacturer applies a run-in procedure to the retarder, the run-in time for the retarder shall not exceed 100 hours at zero retarder apply torque. Optionally a share of a maximum of 6 hours with retarder apply torque may be included.

5.1.3. Test conditions

5.1.3.1. Ambient temperature

The ambient temperature during the test shall be in a range of $25\text{ °C} \pm 10\text{ K}$.

The ambient temperature shall be measured 1 m laterally from the retarder.

5.1.3.2. Ambient pressure

For magnetic retarders the minimum ambient pressure shall be 899 hPa according to International Standard Atmosphere (ISA) ISO 2533.

5.1.3.3. Oil or water temperature

For hydrodynamic retarders:

Except for the fluid, no external heating is allowed.

In case of testing as stand-alone unit, the retarder fluid temperature (oil or water) shall not exceed 87 °C .

In case of testing in combination with transmission, the oil temperature limits for transmission testing shall apply.

5.1.3.4. Oil or water quality

New, recommended first fill oil for the European market shall be used in the test.

For water retarders the water quality shall meet the specifications set out by the manufacturer for the retarder. The water pressure shall be set to a fixed value close to vehicle condition ($1 \pm 0,2$ bar relative pressure at retarder input hose).

5.1.3.5. Oil viscosity

If several oils are recommended for first fill, they are considered to be equal if the oils have a kinematic viscosity within 50 % of each other at the same temperature (within the specified tolerance band for KV100).

5.1.3.6. Oil or water level

The oil/water level shall meet the nominal specifications for the retarder.

5.1.4. Installation

The electric machine, the torque sensor, and speed sensor shall be mounted at the input side of the retarder or transmission.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

The installation of the retarder (and transmission) shall be done with an inclination angle as for installation in the vehicle according to the homologation drawing $\pm 1^\circ$ or at $0^\circ \pm 1^\circ$.

5.1.5. Measurement equipment

As specified for transmission testing in 3.1.4.

5.1.6. Test procedure

5.1.6.1. Zero torque signal compensation:

As specified for transmission testing in 3.1.6.1.

5.1.6.2. Measurement sequence

The torque loss measurement sequence for the retarder testing shall follow the provisions for the transmission testing defined in 3.1.6.3.2. to 3.1.6.3.5.

5.1.6.2.1. Measurement on the retarder as stand-alone unit

When the retarder is tested as stand-alone unit, torque loss measurements shall be conducted using the following speed points:

200, 400, 600, 900, 1 200, 1 600, 2 000, 2 500, 3 000, 3 500, 4 000, 4 500, 5 000, continued up to the maximum retarder rotor speed.

5.1.6.2.2. Measurement in combination with the transmission

5.1.6.2.2. In case the retarder is tested in combination with a transmission, the selected transmission gear shall allow the retarder to operate at its maximum rotor speed.

5.1.6.2.2. The torque loss shall be measured at the operating speeds as indicated for the related transmission testing.

5.1.6.2.2. Measurement points may be added for transmission input speeds below 600 rpm if requested by the manufacturer.

5.1.6.2.2. The manufacturer may separate the retarder losses from the total transmission losses by testing in the order as described below:

(1) ^[F1] The load-independent torque loss for the complete transmission including retarder shall be measured as defined in point 3.1. for transmission testing in one of the higher transmission gears:

$$= T_{l,in,withret}$$

(2) The retarder and related parts shall be replaced with parts required for the equivalent transmission variant without retarder. The measurement of point (1) shall be repeated.

$$= T_{l,in,withoutret}$$

(3) The load-independent torque loss for the retarder system shall be determined by calculating the differences between the two test data sets

$$= T_{l,in,retsys} = T_{l,in,withret} - T_{l,in,withoutret}$$

5.1.7. Measurement signals and data recording

As specified for transmission testing in 3.1.5.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

5.1.8. Measurement validation

All recorded data shall be checked and processed as defined for transmission testing in 3.1.7.

5.2. Complement of input files for the simulation tool

5.2.1 Retarder torque losses for speeds below the lowest measurement speed shall be set equal to the measured torque loss at this lowest measurement speed.

5.2.2 In case the retarder losses were separated out from the total losses by calculating the difference in data sets of testing with and without a retarder (see 5.1.6.2.2.4.), the actual retarder rotor speeds depend on the retarder location, and/or selected gear ratio and retarder step-up ratio and thereby may differ from the measured transmission input shaft speeds. The actual retarder rotor speeds relative to the measured drag loss data shall be calculated as described in 5.1. Table 2.

5.2.3 The torque loss map data shall be formatted and saved as specified in Appendix 12 to this Annex.

6. Additional driveline components (ADC) / angle drive

6.1. Methods for establishing angle drive losses

The angle drive losses shall be determined using one of the following cases:

6.1.1. Case A: Measurement on a separate angle drive

For the torque loss measurement of a separate angle drive, the three options as defined for the determination of the transmission losses shall apply:

Option 1 : Measured torque independent losses and calculated torque dependent losses (Transmission test option 1)

Option 2 : Measured torque independent losses and measured torque dependent losses at full load (Transmission test option 2)

Option 3 : Measurement under full load points (Transmission test option 3)

The measurement of the angle drive losses shall follow the procedure described for the related transmission test option in paragraph 3 diverging in the following requirements:

6.1.1.1 Applicable speed range:

From 200 rpm (at the shaft to which the angle drive is connected) up to the maximum speed according to specifications of the angle drive or the last speed step before the defined maximum speed.

6.1.1.2 Speed step size: 200 rpm

6.1.2. Case B: Individual measurement of an angle drive connected to a transmission

In case the angle drive is tested in combination with a transmission, the testing shall follow one of the defined options for transmission testing:

Option 1 : Measured torque independent losses and calculated torque dependent losses (Transmission test option 1)

Option 2 : Measured torque independent losses and measured torque dependent losses at full load (Transmission test option 2)

Option 3 : Measurement under full load points (Transmission test option 3)

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

6.1.2.1 The manufacturer may separate the angle drive losses from the total transmission losses by testing in the order as described below:

(1) The torque loss for the complete transmission including angle drive shall be measured as defined for the applicable transmission testing option

$$= T_{1,\text{in,withad}}$$

(2) The angle drive and related parts shall be replaced with parts required for the equivalent transmission variant without angle drive. The measurement of point (1) shall be repeated.

$$= T_{1,\text{in,withoutad}}$$

(3) The torque loss for the angle drive system shall be determined by calculating the differences between the two test data sets

$$= T_{1,\text{in,adsys}} = T_{1,\text{in,withad}} - T_{1,\text{in,withoutad}}$$

6.2. Complement of input files for the simulation tool

6.2.1. Torque losses for speeds below the above defined minimum speed shall be set equal to the torque loss at the minimum speed.

6.2.2. In the cases the highest tested angle drive input speed was the last speed step below the defined maximum permissible angle drive speed, an extrapolation of the torque loss shall be applied up to the maximum speed with linear regression based on the two last measured speed steps.

6.2.3. To calculate the torque loss data for the input shaft of the transmission the angle drive is to be combined with, linear interpolation and extrapolation shall be used.

7. Conformity of the certified CO₂ emissions and fuel consumption related properties

7.1. Every transmission, torque converter (TC), other torque transferring components (OTTC) and additional driveline components (ADC) shall be so manufactured as to conform to the approved type with regard to the description as given in the certificate and its annexes. The conformity of the certified CO₂ emissions and fuel consumption related properties procedures shall comply with those set out in Article 12 of Directive 2007/46/EC.

7.2. Torque converter (TC), other torque transferring components (OTTC) and additional driveline components (ADC) shall be excluded from the production conformity testing provisions of section 8 to this annex.

7.3. Conformity of the certified CO₂ emissions and fuel consumption related properties shall be checked on the basis of the description in the certificates set out in Appendix 1 to this Annex.

7.4. Conformity of the certified CO₂ emissions and fuel consumption related properties shall be assessed in accordance with the specific conditions laid down in this paragraph.

7.5. The manufacturer shall test annually at least the number of transmissions indicated in Table 3 based on the total annual production number of the transmissions produced by the manufacturer. For the purpose of establishing the production numbers, only transmissions which fall under the requirements of this Regulation shall be considered.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 7.6 Each transmission which is tested by the manufacturer shall be representative for a specific family. Notwithstanding provisions of the point 7.10., only one transmission per family shall be tested.
- 7.7 For the total annual production volumes between 1 001 and 10 000 transmissions, the choice of the family for which the tests shall be performed shall be agreed between the manufacturer and the approval authority.
- 7.8 For the total annual production volumes above 10 000 transmissions, the transmission family with the highest production volume shall always be tested. The manufacturer shall justify (ex. by showing sales numbers) to the approval authority the number of tests which has been performed and the choice of the families. The remaining families for which the tests are to be performed shall be agreed between the manufacturer and the approval authority.

TABLE 3

Sample size conformity testing

| Total annual production of transmissions | Number of tests |
|--|-----------------|
| 0 – 1 000 | 0 |
| > 1 000-10 000 | 1 |
| > 10 000-30 000 | 2 |
| > 30 000 | 3 |
| > 100 000 | 4 |

- 7.9. For the purpose of the conformity of the certified CO₂ emissions and fuel consumption related properties testing the approval authority shall identify together with the manufacturer the transmission type(s) to be tested. The approval authority shall ensure that the selected transmission type(s) is manufactured to the same standards as for serial production..
- 7.10 If the result of a test performed in accordance with point 8 is higher than the one specified in point 8.1.3., 3 additional transmissions from the same family shall be tested. If at least one of them fails, provisions of Article 23 shall apply.

8. Production conformity testing

For conformity of the certified CO₂ emissions and fuel consumption related properties testing the following method shall apply upon prior agreement between an approval authority and the applicant for a certificate:

8.1 Conformity testing of transmissions

- 8.1.1 The transmission efficiency shall be determined following the simplified procedure described in this paragraph.
- 8.1.2.1 All boundary conditions as specified in this Annex for the certification testing shall apply.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

If other boundary conditions for oil type, oil temperature and inclination angle are used, the manufacturer shall clearly show the influence of these conditions and those used for certification regarding efficiency.

8.1.2.2 For the measurement the same testing option shall be used as for the certification testing, limited to the operating points specified in this paragraph.

8.1.2.2.1. In the case Option 1 was used for certification testing, the torque independent losses for the two speeds defined in point 3 of 8.1.2.2.2. shall be measured and used for the calculation of the torque losses at the three highest torque steps.

In the case Option 2 was used for certification testing, the torque independent losses for the two speeds defined in point 3 of 8.1.2.2.2. shall be measured. The torque dependent losses at maximum torque shall be measured at the same two speeds. The torque losses at the three highest torque steps shall be interpolated as described by the certification procedure.

In the case Option 3 was used for certification testing, the torque losses for the 18 operating points defined in 8.1.2.2.2. shall be measured.

8.1.2.2.2. The efficiency of the transmission shall be determined for 18 operating points defined by the following requirements:

(1) Gears to use:

The 3 highest gears of the transmission shall be used for testing.

(2) Torque range:

The 3 highest torque steps as reported for certification shall be tested.

(3) Speed range:

The two transmission input speeds of 1 200 rpm and 1 600 rpm shall be tested.

8.1.2.3 For each of the 18 operating points, the efficiency of the transmission shall be calculated with:

$$\eta_i = \frac{T_{out} \times n_{out}}{T_{in} \times n_{in}}$$

where:

| | | |
|-----------|---|--|
| η_i | = | Efficiency of each operation point 1 to 18 |
| T_{out} | = | Output torque [Nm] |
| T_{in} | = | Input torque [Nm] |
| n_{in} | = | Input speed [rpm] |
| n_{out} | = | Output speed [rpm] |

8.1.2.4 The total efficiency during conformity of the certified CO₂ emissions and fuel consumption related properties testing $\eta_{A,CoP}$ shall be calculated by the arithmetic mean value of the efficiency of all 18 operating points.

$$\eta_{A,CoP} = \frac{\eta_1 + \eta_2 + \dots + \eta_{18}}{18}$$

8.1.3 The conformity of the certified CO₂ emissions and fuel consumption related properties test is passed when the following condition applies:

The efficiency of the tested transmission during conformity of the certified CO₂ emissions and fuel consumption related properties test $\eta_{A,CoP}$ shall not be lower than X% of the type approved transmission efficiency $\eta_{A,TA}$.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

$$\eta_{A,TA} - \eta_{A,CoP} \leq X$$

[^{F1}X shall be replaced by 1,5 % for SMT/AMT/DCT transmissions and 3 % for APT transmissions or transmission with more than 2 friction shift clutches.]

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 1

MODEL OF A CERTIFICATE OF A COMPONENT, SEPARATE TECHNICAL UNIT OR SYSTEM

Maximum format: A4 (210 × 297 mm)

CERTIFICATE ON CO₂ EMISSIONS AND FUEL CONSUMPTION RELATED PROPERTIES OF A TRANSMISSION / TORQUE CONVERTER / OTHER TORQUE TRANSFERRING COMPONENT/ ADDITIONAL DRIVELINE COMPONENT⁽⁴⁾FAMILY

| | |
|-----------------------------|----------------------|
| Communication concerning: | Administration stamp |
| — granting ⁽¹⁾ | |
| — extension ⁽¹⁾ | |
| — refusal ⁽¹⁾ | |
| — withdrawal ⁽¹⁾ | |

of a certificate with regard to Regulation (EC) No 595/2009 as implemented by Regulation (EU) 2017/2400.

Regulation (EC) No XXXXX and Regulation (EU) 2017/2400 as last amended by

certification number:

Hash:

Reason for extension:

SECTION 1

I

Make (trade name of manufacturer):

0.2 Type:

0.3 Means of identification of type, if marked on the component

0.3.1 Location of the marking:

0.4 Name and address of manufacturer:

0.5 In the case of components and separate technical units, location and method of affixing of the EC approval mark:

0.6 Name(s) and address(es) of assembly plant(s):

0.7 Name and address of the manufacturer's representative (if any)

SECTION. Additional information (where applicable): see Addendum 1.1. Option used for the determination of the torque losses 1.1.1

In case of transmission: specify for both output torque ranges 0-10 kNm and > 10 kNm separately for each transmission gear

2. Approval authority responsible for carrying out the tests:

3. Date of test report

4. Number of test report

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

5. Remarks (if any): see Addendum

6. Place

7. Date

8. Signature

Attachments:

1. Information document

2. Test report

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 2

Transmission information document

| | |
|---------------------------|--------------------|
| Information document no.: | Issue: |
| | Date of issue: |
| | Date of Amendment: |

pursuant to ...

[^{F1}Transmission type/family (if applicable):]

...

0. GENERAL
- 0.1. Name and address of manufacturer
- 0.2. Make (trade name of manufacturer):
- 0.3. Transmission type:
- 0.4. Transmission family:
- 0.5. Transmission type as separate technical unit/Transmission family as separate technical unit
- 0.6. Commercial name(s) (if available):
- 0.7. Means of identification of model, if marked on the transmission:
- 0.8. In the case of components and separate technical units, location and method of affixing of the EC approval mark:
- 0.9. Name(s) and address(es) of assembly plant(s):
- 0.10. Name and address of the manufacturer's representative:

PART 1

ESSENTIAL CHARACTERISTICS OF THE (PARENT) TRANSMISSION AND THE TRANSMISSION TYPES WITHIN A TRANSMISSION FAMILY

| | | | | |
|--|-----------------------------|-----------------------|-----------|-----------|
| | Parent transmission | Family members | | |
| | | | | |
| | or transmission type | | | |
| | | | | |
| | | #1 | #2 | #3 |
| | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

F³0.0GENERAL

-
- 1.0 SPECIFIC TRANSMISSION/TRANSMISSION FAMILY INFORMATION
 - 1.1 Gear ratio. Gearscheme and powerflow
 - 1.2 Center distance for countershaft transmissions
 - 1.3 Type of bearings at corresponding positions (if fitted)
 - 1.4 Type of shift elements (tooth clutches, including synchronisers or friction clutches) at corresponding positions (where fitted)
 - 1.5 Single gear width for Option 1 or Single gear width ± 1 mm for Option 2 or Option 3
 - 1.6 Total number of forward gears
 - 1.7 Number of tooth shift clutches
 - 1.8 Number of synchronizers
 - 1.9 Number of friction clutch plates (except for single dry clutch with 1 or 2 plates)
 - 1.10 Outer diameter of friction clutch plates (except for single dry clutch with 1 or 2 plates)
 - 1.11 Surface roughness of the teeth (incl. drawings)
 - 1.12 Number of dynamic shaft seals
 - 1.13 Oil flow for lubrication and cooling per transmission input shaft revolution
 - 1.14 Oil viscosity at 100 °C (± 10 %)
 - 1.15 System pressure for hydraulically controlled gearboxes
 - 1.16 Specified oil level in reference to central axis and in accordance with the drawing specification (based on average value between lower and upper tolerance) in static or running condition. The oil level is considered as equal if all rotating transmission parts (except for the oil pump and the drive thereof) are located above the specified oil level
 - 1.17 Specified oil level (± 1 mm)
 - 1.18 Gear ratios [-] and maximum input torque [Nm], maximum input power (kW) and maximum input speed [rpm]
 - 1 gear
 - 2 gear
 - 3 gear
 - 4 gear
 - 5 gear
 - 6 gear
 - 7 gear
 - 8 gear
 - 9 gear
 - 10 gear
 - 11 gear
 - 12 gear

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

n gear

LIST OF ATTACHMENTS

| No.: | Description: | Date of issue: |
|------|---|----------------|
| 1 | Information on Transmission test conditions | ... |
| 2 | ... | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Attachment 1 to Transmission information document
Information on test conditions (if applicable)

| | | |
|-----|----------------------------------|--------|
| 1.1 | Measurement with retarder | yes/no |
| 1.2 | Measurement with angle drive | yes/no |
| 1.3 | Maximum tested input speed [rpm] | |
| 1.4 | Maximum tested input torque [Nm] | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 3

Hydrodynamic torque converter (TC) information document

| | |
|---------------------------|--------------------|
| Information document no.: | Issue: |
| | Date of issue: |
| | Date of Amendment: |

pursuant to ...

[^{F1}TC type/family (if applicable):]

...

0. GENERAL

0.1 Name and address of manufacturer

0.2 Make (trade name of manufacturer):

0.3 TC type:

0.4 TC family:

0.5 TC type as separate technical unit / TC family as separate technical unit

0.6 Commercial name(s) (if available):

0.7 Means of identification of model, if marked on the TC:

0.8 In the case of components and separate technical units, location and method of affixing of the EC approval mark:

0.9 Name(s) and address(es) of assembly plant(s):

0.10 Name and address of the manufacturer's representative:

PART 1

ESSENTIAL CHARACTERISTICS OF THE (PARENT) TC AND THE TC TYPES WITHIN A TC FAMILY

| | Parent TC or | Family members | | |
|--|--------------|----------------|----|----|
| | | | | |
| | TC type | #1 | #2 | #3 |
| | | | | |
| | | | | |

^{F3}0.0GENERAL

.....

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

1.0 SPECIFIC TORQUE CONVERTER/TORQUE CONVERTER FAMILY INFORMATION

1.1 For hydrodynamic torque converter without mechanical transmission (serial arrangement).

1.1.1 Outer torus diameter

1.1.2 Inner torus diameter

1.1.3 Arrangement of pump (P), turbine (T) and stator (S) in flow direction

1.1.4 Torus width

1.1.5 Oil type according to test specification

1.1.6 Blade design

1.2 For hydrodynamic torque converter with mechanical transmission (parallel arrangement).

1.2.1 Outer torus diameter

1.2.2 Inner torus diameter

1.2.3 Arrangement of pump (P), turbine (T) and stator (S) in flow direction

1.2.4 Torus width

1.2.5 Oil type according to test specification

1.2.6 Blade design

1.2.7 Gear scheme and power flow in torque converter mode

1.2.8 Type of bearings at corresponding positions (if fitted)

1.2.9 Type of cooling/lubrication pump (referring to parts list)

1.2.10 Type of shift elements (tooth clutches (including synchronisers) OR friction clutches) at corresponding positions where fitted

1.2.11 Oil level according to drawing in reference to central axis

LIST OF ATTACHMENTS

| No.: | Description: | Date of issue: |
|------|---|----------------|
| 1 | Information on Torque Converter test conditions | ... |
| 2 | ... | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Attachment 1 to Torque Converter information document
Information on test conditions (if applicable)

1. Method of measurement

1.1 TC with mechanical transmission

yes/no

1.2 TC as separate unit

yes/no

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 4

Other torque transferring components (OTTC) information document

| | |
|---------------------------|--------------------|
| Information document no.: | Issue: |
| | Date of issue: |
| | Date of Amendment: |

pursuant to ...

[^{F1}OTTC type/family (if applicable):]

...

- 0. GENERAL
- 0.1 Name and address of manufacturer
- 0.2 Make (trade name of manufacturer):
- 0.3 OTTC type:
- 0.4 OTTC family:
- 0.5 OTTC type as separate technical unit/OTTC family as separate technical unit
- 0.6 Commercial name(s) (if available):
- 0.7 Means of identification of model, if marked on the OTTC:
- 0.8 In the case of components and separate technical units, location and method of affixing of the EC approval mark:
- 0.9 Name(s) and address(es) of assembly plant(s):
- 0.10 Name and address of the manufacturer's representative:

PART 1

ESSENTIAL CHARACTERISTICS OF THE (PARENT) OTTC AND THE OTTC TYPES WITHIN AN OTTC FAMILY

| | Parent OTTC | Family member | | |
|--|-------------|---------------|----|----|
| | | #1 | #2 | #3 |
| | | | | |

^{F3}0.0GENERAL

.....

- 1.0 SPECIFIC OTTC INFORMATION
- 1.1 For hydrodynamic torque transferring components (OTTC) / retarder

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 1.1.1 Outer torus diameter
- 1.1.2 Torus width
- 1.1.3 Blade design
- 1.1.4 Operating fluid
- 1.1.5 Outer torus diameter - inner torus diameter (OD-ID)
- 1.1.6 Number of blades
- 1.1.7 Operating fluid viscosity
- 1.2 For magnetic torque transferring components (OTTC) / Retarder
 - 1.2.1 Drum design (electro magnetic retarder or permanent magnetic retarder)
 - 1.2.2 Outer rotor diameter
 - 1.2.3 Cooling blade design
 - 1.2.4 Blade design
 - 1.2.5 Operating fluid
 - 1.2.6 Outer rotor diameter - inner rotor diameter (OD-ID)
 - 1.2.7 Number of rotors
 - 1.2.8 Number of cooling blades/blades
 - 1.2.9 Operating fluid viscosity
 - 1.2.10 Number of arms
- 1.3 For torque transferring components (OTTC)/hydrodynamic clutch
 - 1.3.1 Outer torus diameter
 - 1.3.2 Torus width
 - 1.3.3 Blade design.
 - 1.3.4 Operating fluid viscosity
 - 1.3.5 Outer torus diameter - inner torus diameter (OD-ID)
 - 1.3.6 Number of blades

LIST OF ATTACHMENTS

| No.: | Description: | Date of issue: |
|------|-------------------------------------|----------------|
| 1 | Information on OTTC test conditions | ... |
| 2 | ... | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Attachment 1 to OTTC information document
Information on test conditions (if applicable)

1. Method of measurement
with transmission

yes/no
with engine

yes/no
drive mechanism

yes/no
direct

yes/no
2. Maximum test speed of OTTC main torque absorber e.g. retarder rotor [rpm]

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 5

Additional driveline components (ADC) information document

| | |
|---------------------------|--------------------|
| Information document no.: | Issue: |
| | Date of issue: |
| | Date of Amendment: |

pursuant to ...

[^{F1}ADC type/family (if applicable):]

...

- 0. GENERAL
- 0.1 Name and address of manufacturer
- 0.2 Make (trade name of manufacturer):
- 0.3 ADC type:
- 0.4 ADC family:
- 0.5 ADC type as separate technical unit/ADC family as separate technical unit
- 0.6 Commercial name(s) (if available):
- 0.7 Means of identification of model, if marked on the ADC:
- 0.8 In the case of components and separate technical units, location and method of affixing of the EC approval mark:
- 0.9 Name(s) and address(es) of assembly plant(s):
- 0.10 Name and address of the manufacturer's representative:

PART 1

ESSENTIAL CHARACTERISTICS OF THE (PARENT) ADC AND THE ADC TYPES WITHIN AN ADC FAMILY

| | Parent-ADC | Family member | | |
|--|------------|---------------|----|----|
| | | #1 | #2 | #3 |
| | | | | |

^{F3}0.0GENERAL

.....

- 1.0 SPECIFIC ADC/ANGLE DRIVE INFORMATION
- 1.1 Gear ratio and gearscheme
- 1.2 Angle between input/output shaft

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 1.3 Type of bearings at corresponding positions
- 1.4 Number of teeth per gearwheel
- 1.5 Single gear width
- 1.6 Number of dynamic shaft seals
- 1.7 Oil viscosity ($\pm 10\%$)
- 1.8 Surface roughness of the teeth
- 1.9 Specified oil level in reference to central axis and in accordance with the drawing specification (based on average value between lower and upper tolerance) in static or running condition. The oil level is considered as equal if all rotating transmission parts (except for the oil pump and the drive thereof) are located above the specified oil level
- 1.10 Oil level within ($\pm 1\text{mm}$).

LIST OF ATTACHMENTS

| No.: | Description: | Date of issue: |
|------|------------------------------------|----------------|
| 1 | Information on ADC test conditions | ... |
| 2 | ... | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Attachment 1 to ADC information document
Information on test conditions (if applicable)

1. Method of measurement

| | |
|-------------------|--------|
| with transmission | yes/no |
| drive mechanism | yes/no |
| direct | yes/no |

2. Maximum test speed at ADC input [rpm]

Appendix 6

Family Concept

1. General

A transmission, torque converter, other torque transferring components or additional driveline components family is characterized by design and performance parameters. These shall be common to all members within the family. The manufacturer may decide which transmission, torque converter, other torque transferring components or additional driveline components belong to a family, as long as the membership criteria listed in this Appendix are respected. The related family shall be approved by the Approval Authority. The manufacturer shall provide to the Approval Authority the appropriate information relating to the members of the family.

1.1 Special cases

In some cases there may be interaction between parameters. This shall be taken into consideration to ensure that only transmissions, torque converter, other torque transferring components or additional driveline components with similar characteristics are included within the same family. These cases shall be identified by the manufacturer and notified to the Approval Authority. It shall then be taken into account as a criterion for creating a new transmission, torque converter, other torque transferring components or additional driveline components family.

In case of devices or features, which are not listed in paragraph 9. and which have a strong influence on the level of performance, this equipment shall be identified by the manufacturer on the basis of good engineering practice, and shall be notified to the Approval Authority. It shall then be taken into account as a criterion for creating a new transmission, torque converter, other torque transferring components or additional driveline components family.

1.2 The family concept defines criteria and parameters enabling the manufacturer to group transmission, torque converter, other torque transferring components or additional driveline components into families and types with similar or equal CO₂-relevant data.

2. The Approval Authority may conclude that the highest torque loss of the transmission, torque converter, other torque transferring components or additional driveline components family can best be characterized by additional testing. In this case, the manufacturer shall submit the appropriate information to determine the transmission, torque converter, other torque transferring components or additional driveline components within the family likely to have the highest torque loss level.

If members within a family incorporate other features which may be considered to affect the torque losses, these features shall also be identified and taken into account in the selection of the parent.

3. Parameters defining the transmission family

3.1 The following criteria shall be the same to all members within a transmission family.

- (a) Gear ratio, gearscheme and powerflow (for forward gears only, crawler gears excluded);
- (b) Center distance for countershaft transmissions;
- (c) Type of bearings at corresponding positions (if fitted);
- (d) Type of shift elements (tooth clutches, including synchronisers or friction clutches) at corresponding positions (where fitted).

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 3.2 The following criteria shall be common to all members within a transmission family. The application of a specific range to the parameters listed below is permitted after approval of the Approval Authority
- (a) Single gear width ± 1 mm;
 - (b) Total number of forward gears;
 - (c) Number of tooth shift clutches;
 - (d) Number of synchronizers;
 - (e) Number of friction clutch plates (except for single dry clutch with 1 or 2 plates);
 - (f) Outer diameter of friction clutch plates (except for single dry clutch with 1 or 2 plates);
 - (g) Surface roughness of the teeth;
 - (h) Number of dynamic shaft seals;
 - (i) Oil flow for lubrication and cooling per input shaft revolution;
 - (j) Oil viscosity (± 10 %);
 - (k) System pressure for hydraulically controlled gearboxes;
 - (l) Specified oil level in reference to central axis and in accordance with the drawing specification (based on average value between lower and upper tolerance) in static or running condition. The oil level is considered as equal if all rotating transmission parts (except for the oil pump and the drive thereof) are located above the specified oil level;
 - (m) Specified oil level (± 1 mm).
4. Choice of the parent transmission

The parent transmission shall be selected using the following criteria listed below.

- (a) Highest single gear width for Option 1 or highest Single gear width ± 1 mm for Option 2 or Option 3;
- (b) Highest total number of gears;
- (c) Highest number of tooth shift clutches;
- (d) Highest number of synchronizers;
- (e) Highest number of friction clutch plates (except for single dry clutch with 1 or 2 plates);
- (f) Highest value of the outer diameter of friction clutch plates (except for single dry clutch with 1 or 2 plates);
- (g) Highest value for the surface roughness of the teeth;
- (h) Highest number of dynamic shaft seals;
- (i) Highest oil flow for lubrication and cooling per input shaft revolution;
- (j) Highest oil viscosity;
- (k) Highest system pressure for hydraulically controlled gearboxes;

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- (l) Highest specified oil level in reference to central axis and in accordance with the drawing specification (based on average value between lower and upper tolerance) in static or running condition. The oil level is considered as equal if all rotating transmission parts (except for the oil pump and the drive thereof) are located above the specified oil level;
- (m) Highest specified oil level (± 1 mm).
- 5. Parameters defining the torque converter family
 - 5.1 The following criteria shall be the same to all members within a torque converter (TC) family.
 - 5.1.1 For hydrodynamic torque converter without mechanical transmission (serial arrangement).
 - (a) Outer torus diameter;
 - (b) Inner torus diameter;
 - (c) Arrangement of pump (P), turbine (T) and stator (S) in flow direction;
 - (d) Torus width;
 - (e) Oil type according to test specification;
 - (f) Blade design;
 - 5.1.2 For hydrodynamic torque converter with mechanical transmission (parallel arrangement).
 - (a) Outer torus diameter;
 - (b) Inner torus diameter;
 - (c) Arrangement of pump (P), turbine (T) and stator (S) in flow direction;
 - (d) Torus width;
 - (e) Oil type according to test specification;
 - (f) Blade design
 - (g) Gear scheme and power flow in torque converter mode
 - (h) Type of bearings at corresponding positions (if fitted)
 - (i) Type of cooling/lubrication pump (referring to parts list)
 - (j) Type of shift elements (tooth clutches (including synchronisers) or friction clutches) at corresponding positions where fitted
 - 5.1.3 The following criteria shall be common to all members within a hydrodynamic torque converter with mechanical transmission (parallel arrangement) family. The application of a specific range to the parameters listed below is permitted after approval of the Approval Authority
 - (a) Oil level according to drawing in reference to central axis.
- 6. Choice of the parent torque converter

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 6.1 For hydrodynamic torque converter without mechanical (serial arrangement) transmission.

As long as all criteria listed in 5.1.1 are identical every member of the torque converter without mechanical transmission family can be selected as parent.

- 6.2 For hydrodynamic torque converter with mechanical transmission.

The parent hydrodynamic torque converter with mechanical transmission (parallel arrangement) shall be selected using the following criteria listed below.

- (a) Highest oil level according to drawing in reference to central axis.
7. Parameters defining the other torque transferring components (OTTC) family
- 7.1 The following criteria shall be the same to all members within a hydrodynamic torque transferring components / retarder family.
- (a) Outer torus diameter;
- (b) Torus width;
- (c) Blade design;
- (d) Operating fluid.
- 7.2 The following criteria shall be the same to all members within a magnetic torque transferring components/retarder family.
- (a) Drum design (electro magnetic retarder or permanent magnetic retarder);
- (b) Outer rotor diameter;
- (c) Cooling blade design;
- (d) Blade design.
- 7.3 The following criteria shall be the same to all members within a torque transferring components / hydrodynamic clutch family.
- (a) Outer torus diameter;
- (b) Torus width;
- (c) Blade design.
- 7.4 The following criteria shall be common to all members within a hydrodynamic torque transferring components/retarder family. The application of a specific range to the parameters listed below is permitted after approval of the Approval Authority.
- (a) Outer torus diameter - inner torus diameter (OD-ID);
- (b) Number of blades;
- (c) Operating fluid viscosity ($\pm 50\%$).
- 7.5 The following criteria shall be common to all members within a magnetic torque transferring components / retarder family. The application of a specific range to the parameters listed below is permitted after approval of the Approval Authority.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- (a) Outer rotor diameter - inner rotor diameter (OD-ID);
 - (b) Number of rotors;
 - (c) Number of cooling blades / blades;
 - (d) Number of arms.
- 7.6 The following criteria shall be common to all members within a torque transferring components / hydrodynamic clutch family. The application of a specific range to the parameters listed below is permitted after approval of the Approval Authority.
- (a) Operating fluid viscosity ($\pm 10\%$);
 - (b) Outer torus diameter - inner torus diameter (OD-ID);
 - (c) Number of blades.
8. Choice of the parent torque transferring component
- 8.1 The parent hydrodynamic torque transferring component/retarder shall be selected using the following criteria listed below.
- (a) Highest value: outer torus diameter – inner torus diameter (OD-ID);
 - (b) Highest number of blades;
 - (c) Highest operating fluid viscosity.
- 8.2 The parent magnetic torque transferring component / retarder shall be selected using the following criteria listed below.
- (a) Highest outer rotor diameter – highest inner rotor diameter (OD-ID);
 - (b) Highest number of rotors;
 - (c) Highest number of cooling blades/blades;
 - (d) Highest number of arms.
- 8.3 The parent torque transferring component/hydrodynamic clutch shall be selected using the following criteria listed below.
- (a) Highest operating fluid viscosity ($\pm 10\%$);
 - (b) Highest outer torus diameter – highest inner torus diameter (OD-ID);
 - (c) Highest number of blades.
9. Parameters defining the additional driveline components family
- 9.1 The following criteria shall be the same to all members within an additional driveline components/angle drive family family.
- (a) Gear ratio and gearscheme;
 - (b) Angle between input/output shaft;
 - (c) Type of bearings at corresponding positions

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 9.2 The following criteria shall be common to all members within an additional driveline components/angle family. The application of a specific range to the parameters listed below is permitted after approval of the Approval Authority.
- (a) Single gear width;
 - (b) Number of dynamic shaft seals;
 - (c) Oil viscosity ($\pm 10\%$);
 - (d) Surface roughness of the teeth;
 - (e) Specified oil level in reference to central axis and in accordance with the drawing specification (based on average value between lower and upper tolerance) in static or running condition. The oil level is considered as equal if all rotating transmission parts (except for the oil pump and the drive thereof) are located above the specified oil level.
10. Choice of the parent additional driveline component
- 10.1 The parent additional driveline component / angle drive shall be selected using the following criteria listed below.
- (a) Highest single gear width;
 - (a) Highest number of dynamic shaft seals;
 - (c) Highest oil viscosity ($\pm 10\%$);
 - (d) Highest surface roughness of the teeth;
 - (e) Highest specified oil level in reference to central axis and in accordance with the drawing specification (based on average value between lower and upper tolerance) in static or running condition. The oil level is considered as equal if all rotating transmission parts (except for the oil pump and the drive thereof) are located above the specified oil level.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 7

Markings and numbering

1. Markings

In the case of a component being certified in accordance with this Annex, the component shall bear:

- [^{F1}1.1. The manufacturer's name or trade mark
- 1.2. The make and identifying type indication as recorded in the information referred to in point 0.2 and 0.3 of Appendices 2 - 5 to this Annex]
- 1.3 The certification mark (if applicable) as a rectangle surrounding the lower-case letter 'e' followed by the distinguishing number of the Member State which has granted the certificate:
 - 1 for Germany;
 - 2 for France;
 - 3 for Italy;
 - 4 for the Netherlands;
 - 5 for Sweden;
 - 6 for Belgium;
 - 7 for Hungary;
 - 8 for the Czech Republic;
 - 9 for Spain;
 - 11 for the United Kingdom;
 - 12 for Austria;
 - 13 for Luxembourg;
 - 17 for Finland;
 - 18 for Denmark;
 - 19 for Romania;
 - 20 for Poland;
 - 21 for Portugal;
 - 23 for Greece;
 - 24 for Ireland;
 - 25 for Croatia;
 - 26 for Slovenia;
 - 27 for Slovakia;
 - 29 for Estonia;
 - 32 for Latvia;
 - 34 for Bulgaria;
 - 36 for Lithuania;
 - 49 for Cyprus;
 - 50 for Malta
- 1.4 The certification mark shall also include in the vicinity of the rectangle the 'base approval number' as specified for Section 4 of the type-approval number set out in Annex VII to Directive 2007/46/EC, preceded by the two figures indicating the sequence number assigned to the latest technical amendment to this Regulation and by an alphabetical character indicating the part for which the certificate has been granted.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)


For this Regulation, the sequence number shall be 00.

For this Regulation, the alphabetical character shall be the one laid down in Table 1.

TABLE 1

| | |
|-------------------|--|
| [^{F1} G | Transmission] |
| C | Torque Converter (TC) |
| O | Other torque transferring component (OTTC) |
| D | Additional driveline component (ADC) |

[^{F1}1.5. Example of the certification mark

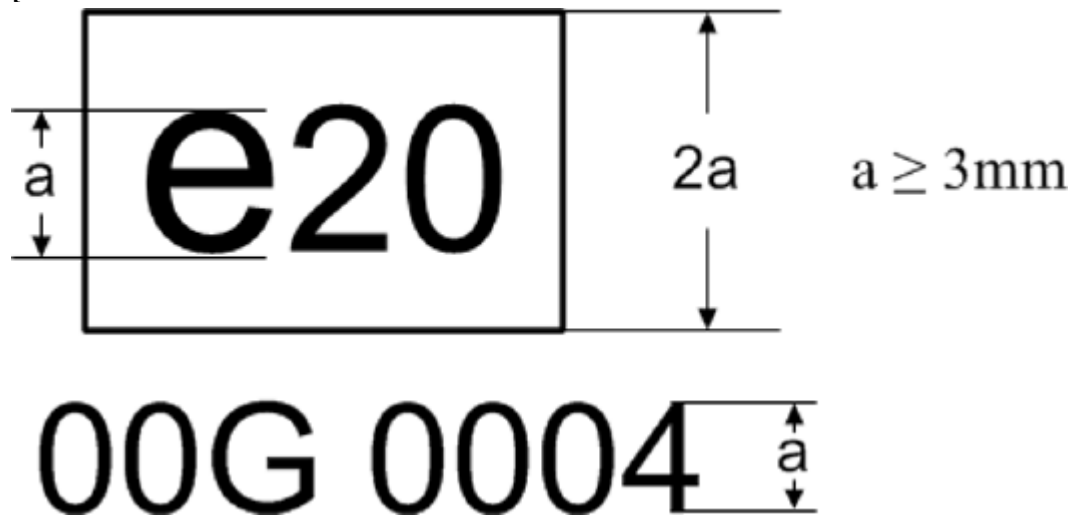

The above certification mark affixed to a transmission, torque converter (TC), other torque transferring component (OTTC) or additional driveline component (ADC) shows that the type concerned has been certified in Poland (e20), pursuant to this Regulation. The first two digits (00) are indicating the sequence number assigned to the latest technical amendment to this Regulation. The following digit indicates that the certification was granted for a transmission (G). The last four digits (0004) are those allocated by the approval authority to the transmission, as the base approval number.]

- 1.6 On request of the applicant for certificate and after prior agreement with the approval authority other type sizes than indicated in 1.5 may be used. Those other type sizes shall remain clearly legible.
- 1.7 The markings, labels, plates or stickers must be durable for the useful life of the transmission, torque converter (TC), other torque transferring components (OTTC) or additional driveline components (ADC) and must be clearly legible and indelible. The manufacturer shall ensure that the markings, labels, plates or sticker cannot be removed without destroying or defacing them.
- 1.8 In the case separate certifications are granted by the same approval authority for a transmission, a torque converter, other torque transferring components or additional driveline components and those parts are installed in combination, the indication of one certification mark referred to in point 1.3 is sufficient. This certification mark

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

shall be followed by the applicable markings specified in point 1.4 for the respective transmission, torque converter, other torque transferring component or additional driveline component separated by ‘/’.

1.9. The certification mark shall be visible when the transmission, torque converter, other torque transferring component or additional driveline component is installed on the vehicle and shall be affixed to a part necessary for normal operation and not normally requiring replacement during component life.

1.10 In the case that torque converter or other torque transferring components are constructed in such a way that they are not accessible and / or visible after being assembled with a transmission the certification mark of the torque converter or other torque transferring component shall be placed on the transmission.

In the case described in first paragraph, if a torque converter or other torque transferring component have not been certified, ‘-’ instead of the certification number shall be indicated on the transmission next to the alphabetical character specified in point 1.4.

2. Numbering

[^F2.1. Certification number for transmissions, torque converter, other torque transferring component and additional driveline component shall comprise the following:

eX*YYYY/YYYY*ZZZZ/ZZZZ*X*0000*00

| Section 1 | Section 2 | Section 3 | Additional letter to Section 3 | Section 4 | Section 5 |
|---|--|--|--------------------------------|--------------------------------|---------------|
| Indication of country issuing the certificate | HDV CO ₂ certification Regulation (2017/2400) | Latest amending Regulation (ZZZZ/ZZZZ) | See Table 1 of this appendix | Base certification number 0000 | Extension 00] |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 8

Standard torque loss values - Transmission

Calculated fallback values based on the maximum rated torque of the transmission:

The torque loss $T_{l,in}$ related to the input shaft of the transmission shall be calculated by

$$T_{l,in} = (T_{d0} + T_{add0}) + (T_{d1000} + T_{add1000}) \times \frac{n_{in}}{1000 \text{ rpm}} + (f_T + f_{T_add}) \times T_{in}$$

where:

| | | |
|--------------|---|---|
| $T_{l,in}$ | = | Torque loss related to the input shaft [Nm] |
| T_{dx} | = | Drag torque at x rpm [Nm] |
| T_{addx} | = | Additional angle drive gear drag torque at x rpm [Nm] |
| | | (if applicable) |
| n_{in} | = | Speed at the input shaft [rpm] |
| f_T | = | 1- η |
| η | = | efficiency |
| f_T | = | 0,01 for direct gear, 0,04 for indirect gears |
| f_{T_add} | = | 0,04 for angle drive gear (if applicable) |
| T_{in} | = | Torque at the input shaft [Nm] |

For transmissions with tooth shift clutches (Synchronised Manual Transmissions (SMT), Automated Manual Transmissions or Automatic Mechanically engaged Transmissions (AMT) and Dual Clutch Transmissions (DCT)) the drag torque T_{dx} is calculated by

$$T_{dx} = T_{d0} = T_{d1000} = 10 \text{ Nm} \times \frac{T_{max \text{ in}}}{2000 \text{ Nm}} = 0,005 \times T_{max \text{ in}}$$

where:

| | | |
|-------------------|---|--|
| $T_{max,in}$ | = | Maximum allowed input torque in any forward gear of transmission [Nm] |
| | = | $\max(T_{max,in,gear})$ |
| $T_{max,in,gear}$ | = | Maximum allowed input torque in gear, where gear = 1, 2, 3, ... top gear). For transmissions with hydrodynamic torque converter this input torque shall be the torque at transmission input before torque converter. |

For transmissions with friction shift clutches (> 2 friction clutches) the drag torque T_{dx} is calculated by

$$T_{dx} = T_{d0} = T_{d1000} = 30 \text{ Nm} \times \frac{T_{max \text{ in}}}{2000 \text{ Nm}} = 0,015 \times T_{max \text{ in}}$$

Here, 'friction clutch' is used in the context of a clutch or brake that operates with friction, and is required for sustained torque transfer in at least one gear.

For transmissions including an angle drive (e.g. bevel gear), the additional angle drive drag torque T_{addx} shall be included in the calculation of T_{dx} :

$$T_{addx} = T_{add0} = T_{add1000} = 10 \text{ Nm} \times \frac{T_{max \text{ in}}}{2000 \text{ Nm}} = 0,005 \times T_{max \text{ in}}$$

(only if applicable)

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 9

Generic model – torque converter

Generic torque converter model based on standard technology:

For the determination of the torque converter characteristics a generic torque converter model depending on specific engine characteristics may be applied.

The generic TC model is based on the following characteristic engine data:

- n_{rated} = Maximum engine speed at maximum power (determined from the engine full-load curve as calculated by the engine pre-processing tool) [rpm]
 T_{max} = Maximum engine torque (determined from the engine full-load curve as calculated by the engine pre-processing tool) [Nm]

Thereby the generic TC characteristics are valid only for a combination of the TC with an engine sharing the same specific characteristic engine data.

Description of the four-point model for the torque capacity of the TC:

Generic torque capacity and generic torque ratio:

Figure 1

Generic torque capacity


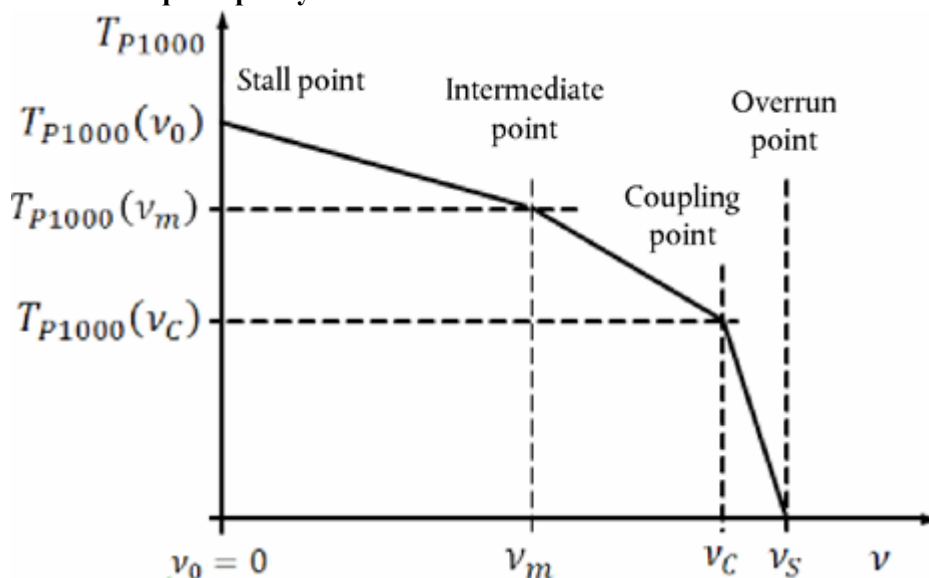


Figure 2

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Generic torque ratio

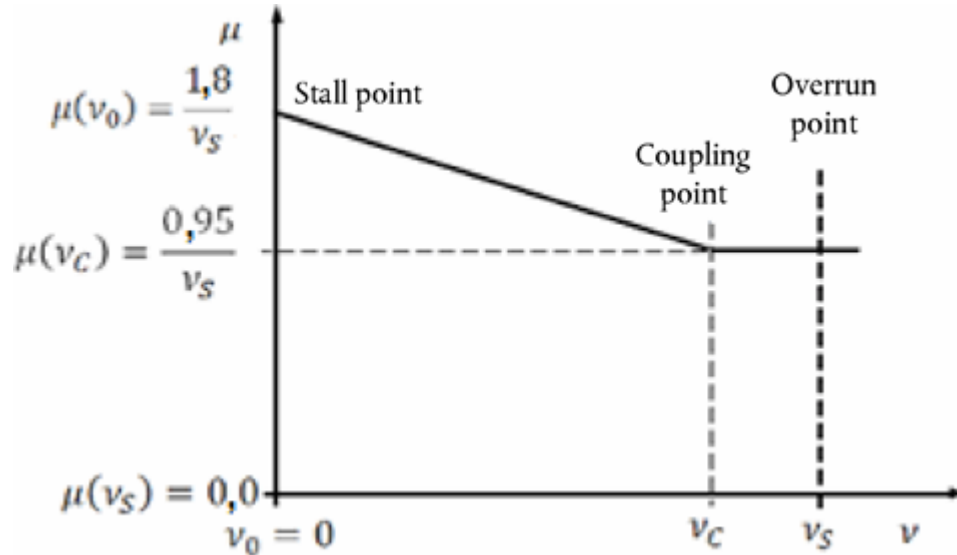

where:

T_{P1000} = Pump reference torque;

$$T_{P1000} = T_P \times \left(\frac{1000 \text{ rpm}}{n_p}\right)^2$$

[Nm]

v = Speed ratio;

$$v = \frac{n_2}{n_1}$$

[-]

μ = Torque ratio;

$$\mu = \frac{T_2}{T_1}$$

[-]

v_s = Speed ratio at overrun point;

$$v_s = \frac{n_2}{n_1}$$

[-]

For TC with rotating housing (Trilock-Type) v_s typically is 1. For other TC concepts, especially power split concepts, v_s may have values different from 1.

v_c = Speed ratio at coupling point;

$$v_c = \frac{n_2}{n_1}$$

[-]

v_0 = Stall point; $v_0 = 0$ [rpm]

v_m = Intermediate speed ratio;

$$v_m = \frac{n_2}{n_1}$$

[-]

The model requires the following definitions for the calculation of the generic torque capacity:

Stall point:

- Stall point at 70 % nominal engine speed.
- Engine torque in stall point at 80 % maximum engine torque.
- Engine/Pump reference torque in stall point:

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

$$T_{P1000}(v_0) = T_{max} \times 0,80 \times \left(\frac{1000 \text{ rpm}}{0,70 \times n_m} \right)^2$$

Intermediate point:

- Intermediate speed ratio $v_m = 0,6 * v_s$
- Engine/pump reference torque in intermediate point at 80 % of reference torque in stall point:

$$T_{P1000}(v_m) = 0,8 \times T_{P1000}(v_0)$$

Coupling point:

- Coupling point at 90 % overrun conditions: $v_c = 0,90 * v_s$
- Engine/pump reference torque in clutch point at 50 % of reference torque in stall point:

$$T_{P1000}(v_c) = 0,5 \times T_{P1000}(v_0)$$

Overrun point:

- Reference torque at overrun conditions = v_s :

$$T_{P1000}(v_s) = 0$$

The model requires the following definitions for the calculation of the generic torque ratio:

Stall point:

- Torque ratio at stall point $v_0 = v_s = 0$:

$$\mu(v_0) = \frac{1,8}{v_s}$$

Intermediate point:

- Linear interpolation between stall point and coupling point

Coupling point:

- Torque ratio at coupling point $v_c = 0,9 * v_s$:

$$\mu(v_c) = \frac{0,95}{v_s}$$

Overrun point:

- Torque ratio at overrun conditions = v_s :

$$\mu(v_s) = \frac{0,95}{v_s}$$

Efficiency:

$$n = \mu * v$$

Linear interpolation between the calculated specific points shall be used.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 10

Standard torque loss values – other torque transferring components

Calculated standard torque loss values for other torque transferring components:

For hydrodynamic retarders (oil or water), the retarder drag torque shall be calculated by

$$T_{\text{retarder}} = \frac{10}{i_{\text{step-up}}} + \left(\frac{2}{(i_{\text{step-up}})^3} \right) \times \left(\frac{n_{\text{retarder}}}{1000} \right)^2$$

For magnetic retarders (permanent or electro-magnetic), the retarder drag torque shall be calculated by:

$$T_{\text{retarder}} = \frac{15}{i_{\text{step-up}}} + \left(\frac{2}{(i_{\text{step-up}})^4} \right) \times \left(\frac{n_{\text{retarder}}}{1000} \right)^3$$

where:

- | | |
|-----------------------|--|
| T_{retarder} | = Retarder drag loss [Nm] |
| n_{retarder} | = Retarder rotor speed [rpm] (see paragraph 5.1 of this Annex) |
| $i_{\text{step-up}}$ | = Step-up ratio = retarder rotor speed/drive component speed (see paragraph 5.1 of this Annex) |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 11

Standard torque loss values – geared angle drive

Consistent with the standard torque loss values for the combination of a transmission with a geared angle drive in Appendix 8, the standard torque losses of a geared angle drive without transmission shall be calculated from:

$$T_{l,add,in} = T_{add0} + T_{add1000} \times \frac{n_{in}}{1000 \text{ rpm}} + f_{T,add} \times T_{in}$$

where:

| | |
|---|---|
| $T_{l,in}$ | = Torque loss related to the input shaft of transmission [Nm] |
| T_{addx} | = Additional angle drive gear drag torque at x rpm [Nm] |
| | (if applicable) |
| n_{in} | = Speed at the input shaft of transmission [rpm] |
| f_T | = $1-\eta$; |
| | η = efficiency |
| | f_{T_add} = 0,04 for angle drive gear |
| T_{in} | = Torque at the input shaft of transmission [Nm] |
| $T_{max,in}$ | = Maximum allowed input torque in any forward gear of transmission [Nm] |
| | = $\max(T_{max,in,gear})$ |
| $T_{max,in,gear}$ | = Maximum allowed input torque in gear, where gear = 1, 2, 3, ... top gear) |
| $T_{addx} = T_{add0} = T_{add1000} = 10 \text{ Nm} \times \frac{T_{max,in}}{2000 \text{ Nm}} = 0,005 \times T_{max,in}$ | |

The standard torque losses obtained by the calculations above may be added to the torque losses of a transmission obtained by Options 1-3 in order to obtain the torque losses for the combination of the specific transmission with an angle drive.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 12

Input parameters for the simulation tool

Introduction

This Appendix describes the list of parameters to be provided by the transmission, torque converter (TC), other torque transferring components (OTTC) and additional driveline components (ADC) manufacturer as input to the simulation tool. The applicable XML schema as well as example data are available at the dedicated electronic distribution platform.

Definitions

- (1) 'Parameter ID': Unique identifier as used in 'Simulation tool' for a specific input parameter or set of input data
- (2) 'Type': Data type of the parameter
- string ... sequence of characters in ISO8859-1 encoding
- token ... sequence of characters in ISO8859-1 encoding, no leading/trailing whitespace
- date ... date and time in UTC time in the format: YYYY-MM-DDTHH:MM:SSZ with italic letters denoting *fixed characters* e.g. '2002-05-30T09:30:10Z'
- integer ... value with an integral data type, no leading zeros, e.g. '1800'
- double, X ... fractional number with exactly X digits after the decimal sign ('.') and no leading zeros e.g. for 'double, 2': '2345.67'; for 'double, 4': '45.6780'
- (3) 'Unit' ... physical unit of the parameter
- Set of input parameters

TABLE 1

Input parameters 'Transmission/General'

| Parameter name | Parameter ID | Type | Unit | Description/Reference |
|-------------------------|--------------|----------|------|--|
| Manufacturer | P205 | token | [-] | |
| Model | P206 | token | [-] | |
| CertificationNumber | P207 | token | [-] | |
| Date | P208 | dateTime | [-] | Date and time when the component-hash is created |
| AppVersion | P209 | token | [-] | |
| TransmissionType | P076 | string | [-] | Allowed values ^a : 'SMT', 'AMT', 'APT-S', 'APT-P' |
| MainCertificationMethod | P254 | string | [-] | Allowed values: 'Option 1', 'Option 2', 'Option 3', |

^a DCT shall be declared as transmission type AMT.]

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | |
|---|--|--|--|-------------------|
| | | | | ‘Standard values’ |
| a | DCT shall be declared as transmission type AMT.] | | | |

TABLE 2

Input parameters ‘Transmission/Gears’ per gear

| Parameter name | Parameter ID | Type | Unit | Description/Reference |
|----------------|--------------|-----------|---------|-----------------------|
| GearNumber | P199 | integer | [-] | |
| Ratio | P078 | double, 3 | [-] | |
| MaxTorque | P157 | integer | [Nm] | optional |
| MaxSpeed | P194 | integer | [1/min] | optional |

TABLE 3

Input parameters ‘Transmission/LossMap’ per gear and for each grid point in the loss map

| Parameter name | Parameter ID | Type | Unit | Description/Reference |
|----------------|--------------|-----------|---------|-----------------------|
| InputSpeed | P096 | double, 2 | [1/min] | |
| InputTorque | P097 | double, 2 | [Nm] | |
| TorqueLoss | P098 | double, 2 | [Nm] | |

TABLE 4

Input parameters ‘TorqueConverter/General’

| Parameter name | Parameter ID | Type | Unit | Description/Reference |
|--------------------------------------|--------------|----------|------|--|
| Manufacturer | P210 | token | [-] | |
| Model | P211 | token | [-] | |
| [^{F1} CertificationNumber] | P212 | token | [-] |] |
| Date | P213 | dateTime | [-] | Date and time when the component-hash is created |
| AppVersion | P214 | string | [-] | |
| CertificationMethod | P257 | string | [-] | Allowed values: ‘Measured’, ‘Standard values’ |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

TABLE 5

Input parameters ‘TorqueConverter/Characteristics’ for each grid point in the characteristic curve

| Parameter name | Parameter ID | Type | Unit | Description/Reference |
|----------------|--------------|-----------|------|-----------------------|
| SpeedRatio | P099 | double, 4 | [-] | |
| TorqueRatio | P100 | double, 4 | [-] | |
| InputTorqueRef | P101 | double, 2 | [Nm] | |

TABLE 6

Input parameters ‘Angledrive/General’ (only required if component applicable)

| Parameter name | Parameter ID | Type | Unit | Description/Reference |
|--------------------------------------|--------------|-----------|------|---|
| Manufacturer | P220 | token | [-] | |
| Model | P221 | token | [-] | |
| [^{F1} CertificationNumber] | P222 | token | [-] |] |
| Date | P223 | dateTime | [-] | Date and time when the component-hash is created |
| AppVersion | P224 | string | [-] | |
| Ratio | P176 | double, 3 | [-] | |
| CertificationMethod | P258 | string | [-] | Allowed values: ‘Option 1’, ‘Option 2’, ‘Option 3’, ‘Standard values’ |

TABLE 7

Input parameters ‘Angledrive/LossMap’ for each grid point in the loss map (only required if component applicable)

| Parameter name | Parameter ID | Type | Unit | Description/Reference |
|----------------|--------------|-----------|---------|-----------------------|
| InputSpeed | P173 | double, 2 | [1/min] | |
| InputTorque | P174 | double, 2 | [Nm] | |
| TorqueLoss | P175 | double, 2 | [Nm] | |

TABLE 8

Input parameters ‘Retarder/General’ (only required if component applicable)

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| Parameter name | Parameter ID | Type | Unit | Description/Reference |
|--------------------------------------|--------------|----------|------|--|
| Manufacturer | P225 | token | [-] | |
| Model | P226 | token | [-] | |
| [^{F1} CertificationNumber] | P227 | token | [-] | |
| Date | P228 | dateTime | [-] | Date and time when the component-hash is created |
| AppVersion | P229 | string | [-] | |
| CertificationMethod | P255 | string | [-] | Allowed values: 'Measured', 'Standard values' |

TABLE 9

Input parameters 'Retarder/LossMap' for each grid point in the characteristic curve (only required if component applicable)

| Parameter name | Parameter ID | Type | Unit | Description/Reference |
|----------------|--------------|-----------|---------|-----------------------|
| RetarderSpeed | P057 | double, 2 | [1/min] | |
| TorqueLoss | P058 | double, 2 | [Nm] | |

ANNEX VII

VERIFYING AXLE DATA

1. Introduction

This Annex describes the certification provisions regarding the torque losses of propulsion axles for heavy duty vehicles. Alternatively to the certification of axles the calculation procedure for the standard torque loss as defined in Appendix 3 to this Annex can be applied for the purpose of the determination of vehicle specific CO₂ emissions.

2. Definitions

For the purposes of this Annex the following definitions shall apply:

- (1) 'Single reduction axle (SR)' means a driven axle with only one gear reduction, typically a bevel gear set with or without hypoid offset.
- (2) 'Single portal axle (SP)' means an axle, that has typically a vertical offset between the rotating axis of the crown gear and the rotating axis of the wheel due to the demand of a higher ground clearance or a lowered floor to allow a low floor concept for inner city buses. Typically, the first reduction is a bevel gear set, the second one a spur gear set with vertical offset close to the wheels.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- (3) 'Hub reduction axle (HR)' means a driven axle with two gear reductions. The first is typically a bevel gear set with or without hypoid offset. The other is a planetary gear set, what is typically placed in the area of the wheel hubs.
- (4) 'Single reduction tandem axle (SRT)' means a driven axle that is basically similar to a single driven axle, but has also the purpose to transfer torque from the input flange over an output flange to a further axle. The torque can be transferred with a spur gear set close at the input flange to generate a vertical offset for the output flange. Another possibility is to use a second pinion at the bevel gear set, what takes off torque at the crown wheel.
- (5) 'Hub reduction tandem axle (HRT)' means a hub reduction axle, what has the possibility to transfer torque to the rear as described under single reduction tandem axle (SRT).
- (6) 'Axle housing' means the housing parts that are needed for structural capability as well as for carrying the driveline parts, bearings and sealings of the axle.
- (7) 'Pinion' means a part of a bevel gear set which usually consists of two gears. The pinion is the driving gear which is connected with the input flange. In case of a SRT / HRT, a second pinion can be installed to take off torque from the crown wheel.
- (8) 'Crown wheel' means a part of a bevel gear set which usually consists of two gears. The crown wheel is the driven gear and is connected with the differential cage.
- (9) 'Hub reduction' means the planetary gear set that is installed commonly outside the planetary bearing at hub reduction axles. The gear set consists of three different gears. The sun, the planetary gears and the ring gear. The sun is in the centre, the planetary gears are rotating around the sun and are mounted to the planetary carrier that is fixed to the hub. Typically, the number of planetary gears is between three and five. The ring gear is not rotating and fixed to the axle beam.
- (10) 'Planetary gear wheels' means the gears that rotate around the sun within the ring gear of a planetary gear set. They are assembled with bearings on a planetary carrier, what is joined to a hub.
- (11) 'Oil type viscosity grade' means a viscosity grade as defined by SAE J306.
- (12) 'Factory fill oil' means the oil type viscosity grade that is used for the oil fill in the factory and which is intended to stay in the axle for the first service interval.
- (13) 'Axle line' means a group of axles that share the same basic axle-function as defined in the family concept.
- (14) 'Axle family' means a manufacturer's grouping of axles which through their design, as defined in Appendix 4 of this Annex, have similar design characteristics and CO₂ and fuel consumption properties.
- (15) 'Drag torque' means the required torque to overcome the inner friction of an axle when the wheel ends are rotating freely with 0 Nm output torque.
- (16) 'Mirror inverted axle casing' means the axle casing is mirrored regarding to the vertical plane.
- (17) 'Axle input' means the side of the axle on which the torque is delivered to the axle.
- (18) 'Axle output' means the side(s) of the axle where the torque is delivered to the wheels.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

3. General requirements

The axle gears and all bearings, except wheel end bearings used for the measurements, shall not be used.

On request of the applicant different gear ratios can be tested in one axle housing using the same wheel ends.

Different axle ratios of hub reduction axles and single portal axles (HR, HRT, SP) may be measured by exchanging the hub reduction only. The provisions as specified in Appendix 4 to this Annex shall apply.

The total run-time for the optional run-in and the measurement of an individual axle (except for the axle housing and wheel-ends) shall not exceed 120 hours.

For testing the losses of an axle the torque loss map for each ratio of an individual axle shall be measured, however axles can be grouped in axle families following the provisions of Appendix 4 to this Annex.

3.1 Run-in

On request of the applicant a run-in procedure may be applied to the axle. The following provisions shall apply for a run-in procedure.

3.1.1 Only factory fill oil shall be used for the run-in procedure. The oil used for the run-in shall not be used for the testing described in paragraph 4.

3.1.2 The speed and torque profile for the run-in procedure shall be specified by the manufacturer.

3.1.3 The run-in procedure shall be documented by the manufacturer with regard to run-time, speed, torque and oil temperature and reported to the approval authority.

3.1.4 The requirements for the oil temperature (4.3.1), measurement accuracy (4.4.7) and test set-up (4.2) do not apply for the run-in procedure.

4. Testing procedure for axles

4.1 Test conditions

4.1.1 Ambient temperature

The temperature in the test cell shall be maintained to $25\text{ °C} \pm 10\text{ °C}$. The ambient temperature shall be measured within a distance of 1 m to the axle housing. Forced heating of the axle may only be applied by an external oil conditioning system as described in 4.1.5.

4.1.2 Oil temperature

The oil temperature shall be measured at the centre of the oil sump or at any other suitable point in accordance with good engineering practice. In case of external oil conditioning, alternatively the oil temperature can be measured in the outlet line from the axle housing to the conditioning system within 5 cm downstream the outlet. In both cases the oil temperature shall not exceed 70 °C .

4.1.3 Oil quality

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Only recommended factory fill oils as specified by the axle manufacturer shall be used for the measurement. In the case of testing different gear ratio variants with one axle housing, new oil shall be filled in for each single measurement.

4.1.4 Oil viscosity

If different oils with multiple viscosity grades are specified for the factory fill, the manufacturer shall choose the oil with the highest viscosity grade for performing the measurements on the parent axle.

If more than one oil within the same viscosity grade is specified within one axle family as factory fill oil, the applicant may choose one oil of these for the measurement related to certification.

4.1.5 Oil level and conditioning

The oil level or filling volume shall be set to the maximum level as defined in the manufacturer's maintenance specifications.

An external oil conditioning and filtering system is permitted. The axle housing may be modified for the inclusion of the oil conditioning system.

The oil conditioning system shall not be installed in a way which would enable changing oil levels of the axle in order to raise efficiency or to generate propulsion torques in accordance with good engineering practice.

4.2 Test set-up

For the purpose of the torque loss measurement different test set-ups are permitted as described in paragraph 4.2.3 and 4.2.4.

4.2.1 Axle installation

In case of a tandem axle, each axle shall be measured separately. The first axle with longitudinal differential shall be locked. The output shaft of drive-through axles shall be installed freely rotatable.

4.2.2 Installation of torque meters

4.2.2.1 For a test setup with two electric machines, the torque meters shall be installed on the input flange and on one wheel end while the other one is locked.

4.2.2.2 For a test setup with three electric machines, the torque meters shall be installed on the input flange and on each wheel end.

4.2.2.3 Half shafts of different lengths are permitted in a two machine set-up in order to lock the differential and to ensure that both wheel ends are turning.

4.2.3 Test set-up 'Type A'

A test set-up considered 'Type A' consists of a dynamometer on the axle input side and at least one dynamometer on the axle output side(s). Torque measuring devices shall be installed on the axle input- and output- side(s). For type A set-ups with only one dynamometer on the output side, the free rotating end of the axle shall be locked.

To avoid parasitic losses, the torque measuring devices shall be positioned as close as possible to the axle input- and output- side(s) being supported by appropriate bearings.

Additionally mechanical isolation of the torque sensors from parasitic loads of the shafts, for example by installation of additional bearings and a flexible coupling or lightweight cardan


Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

shaft between the sensors and one of these bearings can be applied. Figure 1 shows an example for a test test-up of Type A in a two dynamometer lay-out.

For Type A test set-up configurations the manufacturer shall provide an analysis of the parasitic loads. Based on this analysis the approval authority shall decide about the maximum influence of parasitic loads. However the value i_{para} cannot be lower than 10 %.

Figure 1 Example of Test set-up ‘Type A’

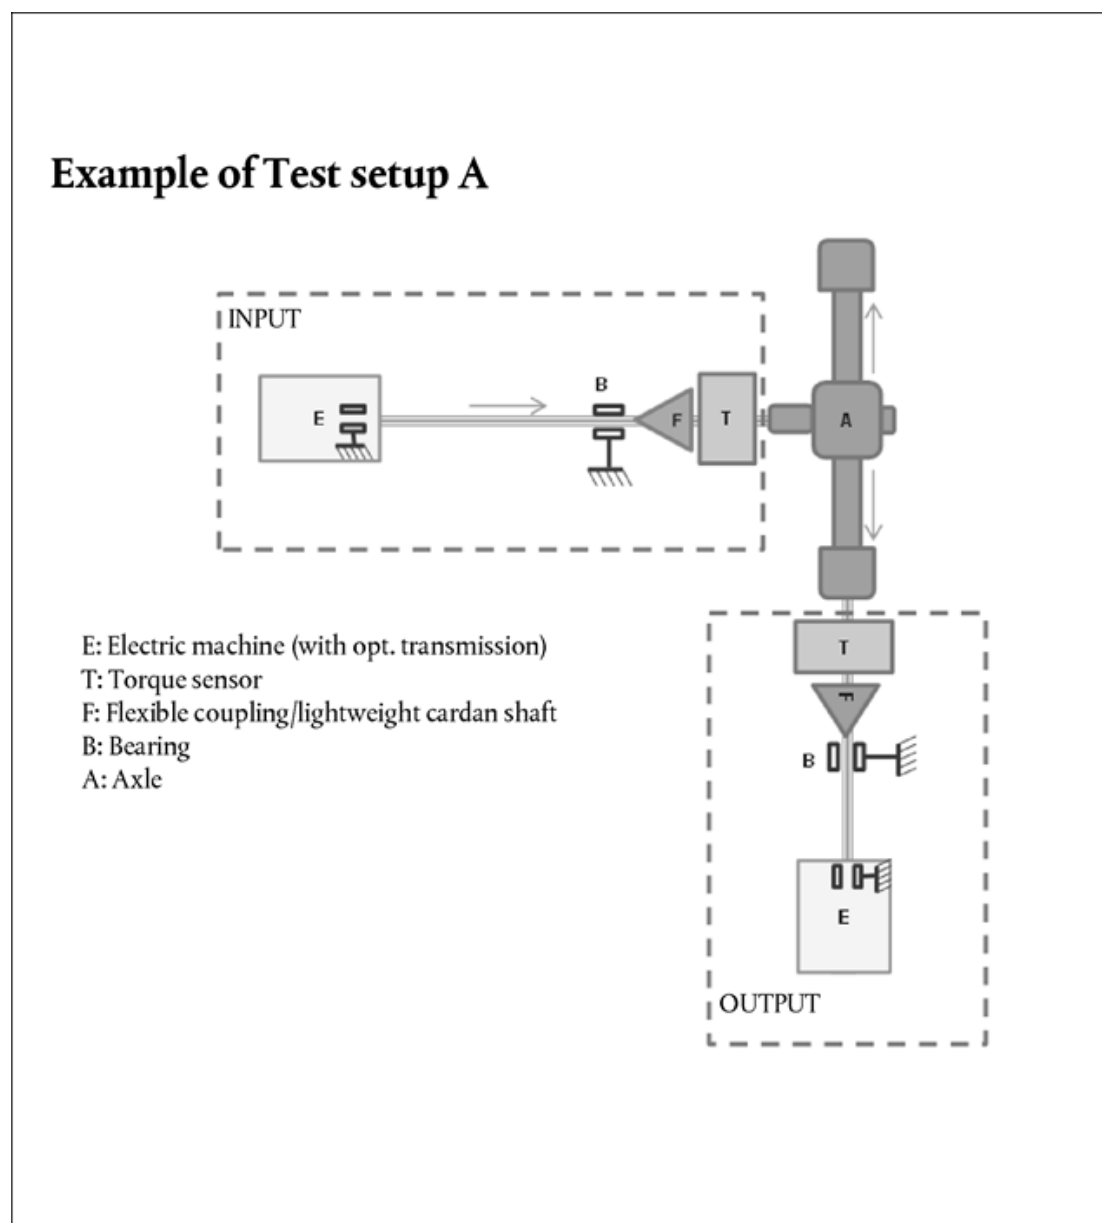

4.2.4 Test set-up ‘Type B’

Any other test set-up configuration is called test set-up Type B. The maximum influence of parasitic loads i_{para} for those configurations shall be set to 100 %.

Lower values for i_{para} may be used in agreement with the approval authority.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

4.3 Test procedure

To determine the torque loss map for an axle, the basic torque loss map data shall be measured and calculated as specified in paragraph 4.4. [F1The torque loss results shall be complemented in accordance with 4.4.8 and formatted in accordance with Appendix 6 for the further processing by the simulation tool.]

4.3.1 Measurement equipment

The calibration laboratory facilities shall comply with the requirements of either ISO/TS 16949, ISO 9000 series or ISO/IEC 17025. All laboratory reference measurement equipment, used for calibration and/or verification, shall be traceable to national (international) standards.

4.3.1.1 Torque measurement

The torque measurement uncertainty shall be calculated and included as described in paragraph 4.4.7.

The sample rate of the torque sensors shall be in accordance with 4.3.2.1.

4.3.1.2 Rotational speed

The uncertainty of the rotational speed sensors for the measurement of input and output speed shall not exceed ± 2 rpm.

4.3.1.3 Temperatures

The uncertainty of the temperature sensors for the measurement of the ambient temperature shall not exceed ± 1 °C.

The uncertainty of the temperature sensors for the measurement of the oil temperature shall not exceed $\pm 0,5$ °C.

4.3.2 Measurement signals and data recording

The following signals shall be recorded for the purpose of the calculation of the torque losses:

- (i) Input and output torques [Nm]
- (ii) Input and/or output rotational speeds [rpm]
- (iii) Ambient temperature [°C]
- (iv) Oil temperature [°C]
- (v) Temperature at the torque sensor

4.3.2.1 The following minimum sampling frequencies of the sensors shall be applied:

Torque: 1 kHz

Rotational speed: 200 Hz

Temperatures: 10 Hz

4.3.2.2 The recording rate of the data used to determine the arithmetic mean values of each grid point shall be 10 Hz or higher. The raw data do not need to be reported.

Signal filtering may be applied in agreement with the approval authority. Any aliasing effect shall be avoided.

4.3.3 Torque range:

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

The extent of the torque loss map to be measured is limited to:

- either an output torque of 10 kNm
- or an input torque of 5 kNm
- or the maximum engine power tolerated by the manufacturer for a specific axle or in case of multiple driven axles according to the nominal power distribution.

4.3.3.1 The manufacturer may extend the measurement up to 20 kNm output torque by means of linear extrapolation of torque losses or by performing measurements up to 20 kNm output torque with steps of 2 000 Nm. For this additional torque range another torque sensor at the output side with a maximum torque of 20 kNm (2-machine layout) or two 10 kNm sensors (3-machine layout) shall be used.

If the radius of the smallest tire is reduced (e.g. product development) after completing the measurement of an axle or when the physic boundaries of the test stand are reached (e.g. by product development changes), the missing points may be extrapolated by the manufacturer out of the existing map. The extrapolated points shall not exceed more than 10 % of all points in the map and the penalty for these points is 5 % torque loss to be added on the extrapolated points.

4.3.3.2 Output torque steps to be measured:

250 Nm < T_{out} < 1 000 Nm : 250 Nm steps
1 000 Nm ≤ T_{out} ≤ 2 000 Nm : 500 Nm steps
2 000 Nm < T_{out} ≤ 10 000 Nm : 1 000 Nm steps
 T_{out} > 10 000 Nm : 2 000 Nm steps

If the maximum input torque is limited by the manufacturer, the last torque step to be measured is the one below this maximum without consideration of any losses. In that case an extrapolation of the torque loss shall be applied up to the torque corresponding to the manufacturer's limitation with the linear regression based on the torque steps of the corresponding speed step.

4.3.4 Speed range

The range of test speeds shall comprise from 50 rpm wheel speed to the maximum speed. The maximum test speed to be measured is defined by either the maximum axle input speed or the maximum wheel speed, whichever of the following conditions is reached first:

4.3.4.1 The maximum applicable axle input speed may be limited to design specification of the axle.

4.3.4.2 The maximum wheel speed is measured under consideration of the smallest applicable tire diameter at a vehicle speed of 90 km/h for trucks and 110 km/h for coaches. If the smallest applicable tire diameter is not defined, paragraph 4.3.4.1 shall apply.

4.3.5 Wheel speed steps to be measured

The wheel speed step width for testing shall be 50 rpm.

4.4 Measurement of torque loss maps for axles

4.4.1 Testing sequence of the torque loss map

For each speed step the torque loss shall be measured for each output torque step starting from 250 Nm upward to the maximum and downward to the minimum. The speed steps can be run in any order. ^{F2}The torque measurement sequence shall be performed and recorded twice.]

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Interruptions of the sequence for cooling or heating purposes are permitted.

4.4.2 Measurement duration

[^{F1}The measurement duration for each single grid point shall be 5-20 seconds.]

4.4.3 Averaging of grid points

[^{F1}The recorded values for each grid point within the 5-20 seconds interval in accordance with point 4.4.2 shall be averaged to an arithmetic mean.]

All four averaged intervals of corresponding speed and torque grid points from both sequences measured each upward and downward shall be averaged to an arithmetic mean and result into one torque loss value.

4.4.4 The torque loss (at input side) of the axle shall be calculated by

$$T_{loss} = T_{in} - \sum \frac{T_{out}}{i_{gear}}$$

where:

| | | |
|------------|---|--|
| T_{loss} | = | Torque loss of the axle at the input side [Nm] |
| T_{in} | = | Input torque [Nm] |
| i_{gear} | = | Axle gear ratio [-] |
| T_{out} | = | Output torque [Nm] |

4.4.5 Measurement validation

[^{F1}4.4.5.1 The averaged speed values per grid point (5-20 s interval) shall not deviate from the setting values by more than ± 5 rpm for the output speed.]

4.4.5.2 The averaged output torque values as described under 4.4.3 for each grid point shall not deviate more than ± 20 Nm or ± 1 % from the torque set point for the according grid point, whichever is the higher value.

4.4.5.3 If the above specified criteria are not met the measurement is void. In this case, the measurement for the entire affected speed step shall be repeated. After passing the repeated measurement, the data shall be consolidated.

4.4.6 Uncertainty calculation

The total uncertainty $U_{T,loss}$ of the torque loss shall be calculated based on the following parameters:

- Temperature effect
- Parasitic loads
- Uncertainty (incl. sensitivity tolerance, linearity, hysteresis and repeatability)

The total uncertainty of the torque loss ($U_{T,loss}$) is based on the uncertainties of the sensors at 95 % confidence level. The calculation shall be done for each applied sensor (e.g. three machine lay out: $U_{T,in}$, $U_{T,out,1}$, $U_{T,out,2}$) as the square root of the sum of squares ('Gaussian law of error propagation').

$$U_{T,loss} = \sqrt{U_{T,in}^2 + \sum \left(\frac{U_{T,out}}{i_{gear}} \right)^2}$$

$$U_{T,in/out} = 2 \times \sqrt{U_2^{TRC} + U_2^{TK0} + U_2^{cal} + U_2^{para}}$$

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

$$U_{TKC} = \frac{1}{\sqrt{3}} \times \frac{w_{tkc}}{K_{ref}} \times \Delta K \times T_c$$

$$U_{TK0} = \frac{1}{\sqrt{3}} \times \frac{w_{tk0}}{K_{ref}} \times \Delta K \times T_n$$

$$U_{cal} = 1 \times \frac{w_{cal}}{k_{cal}} \times T_n$$

$$U_{para} = \frac{1}{\sqrt{3}} \times w_{para} \times T_n$$

$$w_{para} = sens_{para} * i_{para}$$

where:

| | |
|----------------|---|
| $U_{T,in/out}$ | = Uncertainty of input/output torque loss measurement separately for input and output torque; [Nm] |
| i_{gear} | = Axle gear ratio [-] |
| U_{TKC} | = Uncertainty by temperature influence on current torque signal; [Nm] |
| w_{tkc} | = Temperature influence on current torque signal per K_{ref} , declared by sensor manufacturer; [%] |
| U_{TK0} | = Uncertainty by temperature influence on zero torque signal (related to nominal torque) [Nm] |
| w_{tk0} | = Temperature influence on zero torque signal per K_{ref} (related to nominal torque), declared by sensor manufacturer; [%] |
| K_{ref} | = Reference temperature span for tkc and tk0, declared by sensor manufacturer; [°C] |
| ΔK | = Absolute difference in sensor temperature measured at torque sensor between calibration and measurement; If the sensor temperature cannot be measured, a default value of $\Delta K = 15$ K shall be used [°C] |
| T_c | = Current/measured torque value at torque sensor; [Nm] |
| T_n | = Nominal torque value of torque sensor; [Nm] |
| U_{cal} | = Uncertainty by torque sensor calibration; [Nm] |
| w_{cal} | = Relative calibration uncertainty (related to nominal torque); [%] |
| k_{cal} | = calibration advancement factor (if declared by sensor manufacturer, otherwise = 1) |
| U_{para} | = Uncertainty by parasitic loads; [Nm] |
| w_{para} | = $sens_{para} * i_{para}$ |
| | Relative influence of forces and bending torques caused by misalignment |
| $sens_{para}$ | = Maximum influence of parasitic loads for specific torque sensor declared by sensor manufacturer [%]; if no specific value for parasitic loads is declared by the sensor manufacturer, the value shall be set to 1,0 % |
| i_{para} | = Maximum influence of parasitic loads for specific torque sensor depending on test set-up as indicated in section 4.2.3 and 4.2.4 of this annex. |

4.4.7 Assessment of total uncertainty of the torque loss

In the case the calculated uncertainties $U_{T,in/out}$ are below the following limits, the reported torque loss $T_{loss,rep}$ shall be regarded as equal to the measured torque loss T_{loss} .

$U_{T,in}$: 7,5 Nm or 0,25 % of the measured torque, whichever allowed uncertainty value is higher

$U_{T,out}$: 15 Nm or 0,25 % of the measured torque, whichever allowed uncertainty value is higher

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

In the case of higher calculated uncertainties, the part of the calculated uncertainty exceeding the above specified limits shall be added to T_{loss} for the reported torque loss $T_{loss,rep}$ as follows:

If the limits of $U_{T,in}$ are exceeded:

$$T_{loss,rep} = T_{loss} + \Delta U_{T,in}$$

$$\Delta U_{T,in} = \text{MIN}((U_{T,in} - 0,25 \% * T_c) \text{ or } (U_{T,in} - 7,5 \text{ Nm}))$$

If limits of $U_{T,out}$ are exceeded:

$$T_{loss,rep} = T_{loss} + \Delta U_{T,out}/i_{gear}$$

$$\Delta U_{T,out} = \text{MIN}((U_{T,out} - 0,25 \% * T_c) \text{ or } (U_{T,out} - 15 \text{ Nm}))$$

where:

| | |
|----------------|--|
| $U_{T,in/out}$ | = Uncertainty of input/output torque loss measurement separately for input and output torque; [Nm] |
| i_{gear} | = Axle gear ratio [-] |
| ΔU_T | = The part of the calculated uncertainty exceeding the specified limits |

4.4.8 Complement of torque loss map data

4.4.8.1 If the torque values exceed the upper range limit linear extrapolation shall be applied. For the extrapolation the slope of linear regression based on all measured torque points for the corresponding speed step shall be applied.

4.4.8.2 For the output torque range values below 250 Nm the torque loss values of the 250 Nm point shall be applied.

4.4.8.3 For 0 rpm wheel speed rpm the torque loss values of the 50 rpm speed step shall be applied.

4.4.8.4 For negative input torques (e.g. overrun, free rolling), the torque loss value measured for the related positive input torque shall be applied.

[F]4.4.8.5 In case of a tandem axle, the combined torque loss map for both axles shall be calculated out of the test results for the single axles at the input side. The input torques shall also be added.

$$T_{loss,rep,tdm} = T_{loss,rep,1} + T_{loss,rep,2}$$

$$T_{in,tdm} = T_{in,1} + T_{in,2}$$

5. Conformity of the certified CO₂ emissions and fuel consumption related properties

5.1. Every axle type approved in accordance with this Annex shall be so manufactured as to conform, with regard to the description as given in the certification form and its annexes, to the approved type. The conformity of the certified CO₂ emissions and fuel consumption related properties procedures shall comply with those set out in Article 12 of Directive 2007/46/EC.

5.2. Conformity of the certified CO₂ emissions and fuel consumption related properties shall be checked on the basis of the description in the certificate set out in Appendix 1 to this Annex and the specific conditions laid down in this paragraph.

5.3. The manufacturer shall test annually at least the number of axles indicated in Table 1 based on the annual production numbers. For the purpose of establishing the production numbers, only axles which fall under the requirements of this Regulation shall be considered.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 5.4. Each axle which is tested by the manufacturer shall be representative for a specific family.
- 5.5. The number of families of single reduction (SR) axles and other axles for which the tests shall be conducted is shown in Table 1.

TABLE 1

Sample size for conformity testing

| Production number | Number of test for SR axles | Number of tests for other axles than SR axles |
|--------------------------|------------------------------------|--|
| 0 – 40 000 | 2 | 1 |
| 40 001 – 50 000 | 2 | 2 |
| 50 001 – 60 000 | 3 | 2 |
| 60 001 – 70 000 | 4 | 2 |
| 70 001 – 80 000 | 5 | 2 |
| 80 001 and more | 5 | 3 |


- 5.6. The two axle families with the highest production volumes shall always be tested. The manufacturer shall justify (e.g. by showing sales numbers) to the approval authority the number of tests which has been performed and the choice of the families. The remaining families for which the tests are to be performed shall be agreed between the manufacturer and the approval authority.
- 5.7. For the purpose of the conformity of the certified CO₂ emissions and fuel consumption related properties testing the approval authority shall identify together with the manufacturer the axle type(s) to be tested. The approval authority shall ensure that the selected axle type(s) are manufactured according to the same standards as for serial production.
- 5.8. If the result of a test performed in accordance with point 6 is higher than the one specified in point 6.4, three additional axles from the same family shall be tested. If at least one of them fails, provisions of Article 23 shall apply.
6. Production conformity testing
- 6.1 For conformity of the certified CO₂ emissions and fuel consumption related properties testing, one of the following methods shall apply upon prior agreement between the approval authority and the applicant for a certificate:
- (a) Torque loss measurement according to this Annex by following the full procedure limited to the grid points described in 6.2.
- (b) Torque loss measurement according to this Annex by following the full procedure limited to the grid points described in 6.2, with exception of the run-in procedure. In order to consider the run-in characteristic of an axle, a corrective factor may be applied. This factor shall be determined according to good engineering judgement and with agreement of the approval authority.
- (c) Measurement of drag torque according to paragraph 6.3. The manufacturer may choose a run-in procedure according to good engineering judgement up to 100 h.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 6.2 If the conformity of the certified CO₂ emissions and fuel consumption related properties assessment is performed according to 6.1. a) or b) the grid points for this measurement are limited to 4 grid points from the approved torque loss map.
- 6.2.1 For that purpose the full torque loss map of the axle to be tested for conformity of the certified CO₂ emissions and fuel consumption related properties shall be segmented into three equidistant speed ranges and three torque ranges in order to define nine control areas as shown in figure 2.

^{F1}Figure 2 Speed and torque range for conformity of the certified CO₂ emissions and fuel consumption related properties testing

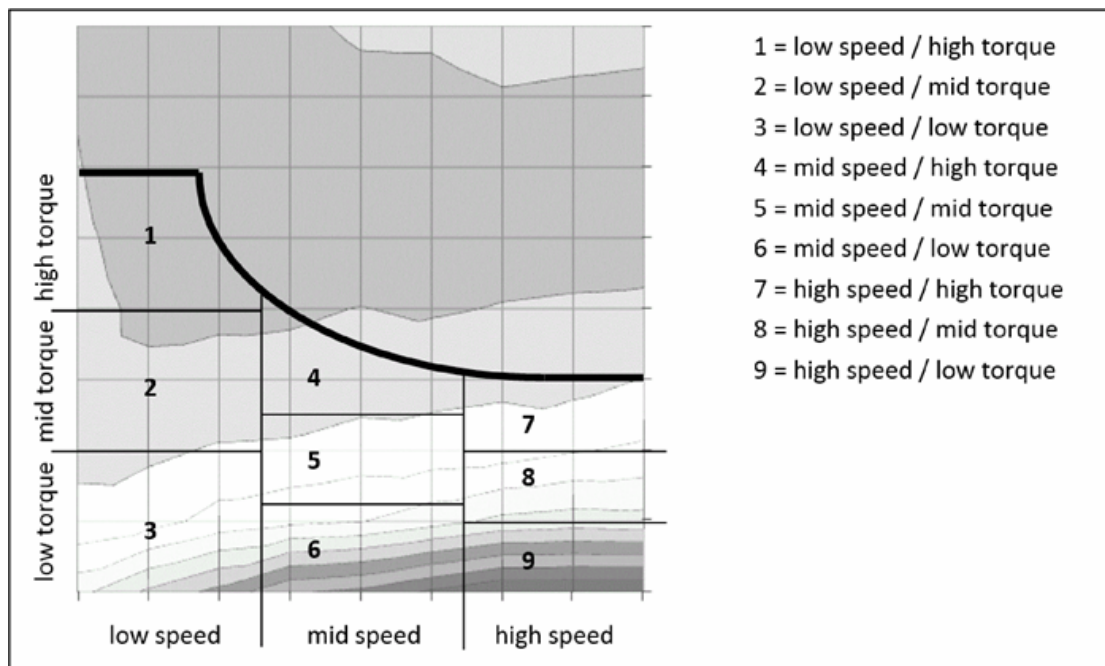

- 6.2.2 For four control areas one point shall be selected, measured and evaluated according to the full procedure as described in section 4.4. Each control point shall be selected in the following manner:
- The control areas shall be selected depending on the axle line:
 - SR axles including tandem combinations: Control areas 5, 6, 8 and 9
 - HR axles including tandem combinations: Control areas 2, 3, 4 and 5
 - The selected point shall be located in the centre of the area referring to the speed range and the applicable torque range for the according speed.
 - In order to have a corresponding point for comparison with the loss map measured for certification, the selected point shall be moved to the closest measured point from the approved map.
- 6.2.3 For each measured point of the conformity of the certified CO₂ emissions and fuel consumption related properties test and its corresponding point of the type approved map, the efficiency shall be calculated with:

$$\eta_t = \frac{T_{out}}{i_{axle} \times T_{in}}$$

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

where:

η_i = Efficiency of the grid point from each single control area 1 to 9
 T_{out} = Output torque [Nm]
 T_{in} = Input torque [Nm]
 i_{axle} = axle ratio [-]

6.2.4 The average efficiency of the control area shall be calculated as follows:

For SR axles:

$$\eta_{avr,mid\ speed} = \frac{\eta_5 + \eta_6}{2}$$
$$\eta_{avr,high\ speed} = \frac{\eta_6 + \eta_7}{2}$$
$$\eta_{avr,total} = \frac{\eta_{avr,mid\ speed} + \eta_{avr,high\ speed}}{2}$$

For HR axles:

$$\eta_{avr,low\ speed} = \frac{\eta_2 + \eta_3}{2}$$
$$\eta_{avr,mid\ speed} = \frac{\eta_4 + \eta_5}{2}$$
$$\eta_{avr,total} = \frac{\eta_{avr,low\ speed} + \eta_{avr,mid\ speed}}{2}$$

where:

$\eta_{avr,low\ speed}$ = average efficiency for low speed
 $\eta_{avr,mid\ speed}$ = average efficiency for mid speed
 $\eta_{avr,high\ speed}$ = average efficiency for high speed
 $\eta_{avr,total}$ = simplified averaged efficiency for axle

6.2.5 If the conformity of the certified CO₂ emissions and fuel consumption related properties assessment is performed in accordance with 6.1. c), the drag torque of the parent axle of the family to which the tested axle belongs shall be determined during the certification. This can be done prior to the run-in procedure or after the run-in procedure according to paragraph 3.1 or by linear extrapolation of all the torque map values for each speed step downwards to 0 Nm.

6.3 Determination of drag torque

6.3.1 For determination of the drag torque of an axle a simplified test set-up with one electric machine and one torque sensor on the input side is required.

6.3.2 The test conditions according to paragraph 4.1 shall apply. The uncertainty calculation regarding torque may be omitted.

6.3.3 The drag torque shall be measured in the speed range of the approved type according to paragraph 4.3.4 under consideration of the speed steps according to 4.3.5.

6.4. Conformity of the certified CO₂ emissions and fuel consumption related properties test assessment

6.4.1 A conformity of the certified CO₂ emissions and fuel consumption related properties test is passed when one of the following conditions apply:

(a) ^[F]If a torque loss measurement in accordance with points 6.1(a) or (b) is conducted, the average efficiency of the tested axle during conformity of the certified CO₂ emissions and fuel consumption related properties procedure shall not be lower than 1,5 % for SR axles and 2,0 % for all other axles lines below the corresponding average efficiency of the type approved axle.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- (b) If a measurement of drag torque in accordance with point 6.1(c) is conducted, the drag torque of the tested axle during conformity of the certified CO₂ emissions and fuel consumption related properties procedure shall be lower than the corresponding drag torque of the type approved axle or within the tolerance indicated in Table 2.]

TABLE 2

| Axleline | Tolerances for axles measured in CoP after run-in Comparison to Td0 | | | | Tolerances for axles measured in CoP without run in Comparison to Td0 | | | |
|------------|---|--------------------------------|-------|--------------------------------|---|--------------------------------|-------|--------------------------------|
| | for i | tolerance for i Td0_input [Nm] | for i | tolerance for i Td0_input [Nm] | for i | tolerance for i Td0_input [Nm] | for i | tolerance for i Td0_input [Nm] |
| SR | ≤ 3 | 15 | > 3 | 12 | ≤ 3 | 25 | > 3 | 20 |
| SRT | ≤ 3 | 16 | > 3 | 13 | ≤ 3 | 27 | > 3 | 21 |
| SP | ≤ 6 | 11 | > 6 | 10 | ≤ 6 | 18 | > 6 | 16 |
| HR | ≤ 7 | 10 | > 7 | 9 | ≤ 7 | 16 | > 7 | 15 |
| HRT | ≤ 7 | 11 | > 7 | 10 | ≤ 7 | 18 | > 7 | 16 |

i = gear ratio.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 1

MODEL OF A CERTIFICATE OF A COMPONENT, SEPARATE TECHNICAL UNIT OR SYSTEM

Maximum format: A4 (210 × 297 mm)

CERTIFICATE ON CO₂ EMISSIONS AND FUEL CONSUMPTION RELATED PROPERTIES OF AN AXLE FAMILY

| | |
|---|----------------------|
| Communication concerning: — granting ^a — extension ^a — refusal ^a — withdrawal ^a | Administration stamp |
| a Delete where not applicable (there are cases where nothing needs to be deleted when more than one entry is applicable) | |

of a certificate on CO₂ emission and fuel consumption related properties of an axle family in accordance with Commission Regulation (EU) 2017/2400.

Commission Regulation (EU) 2017/2400 as last amended by ...

Certification number:

Hash:

Reason for extension:

SECTION 1

I

Make (trade name of manufacturer):

0.2 Type:

0.3 Means of identification of type, if marked on the axle

0.3.1 Location of the marking:

0.4 Name and address of manufacturer:

0.5 In the case of components and separate technical units, location and method of affixing of the EC certification mark:

0.6 Name(s) and address(es) of assembly plant(s):

0.7 Name and address of the manufacturer's representative (if any)

SECTION 2

II

Additional information (where applicable): see Addendum

2. Approval authority responsible for carrying out the tests:

3. Date of test report

4. Number of test report

5. Remarks (if any): see Addendum

6. Place

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

7. Date
8. Signature

Attachments:

1. Information document
2. Test report

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 2

Axle information document

| | |
|---------------------------|--------------------|
| Information document no.: | Issue: |
| | Date of issue: |
| | Date of Amendment: |

pursuant to ...

[^{F1}Axle type/family (if applicable):]

...

0. GENERAL
- 0.1 Name and address of manufacturer
- 0.2 Make (trade name of manufacturer):
- 0.3 Axle type:
- 0.4 Axle family (if applicable):
- 0.5 Axle type as separate technical unit / Axle family as separate technical unit
- 0.6 Commercial name(s) (if available):
- 0.7 Means of identification of type, if marked on the axle:
- 0.8 In the case of components and separate technical units, location and method of affixing of the certification mark:
- 0.9 Name(s) and address(es) of assembly plant(s):
- 0.10 Name and address of the manufacturer's representative:

PART 1

ESSENTIAL CHARACTERISTICS OF THE (PARENT) AXLE AND THE AXLE TYPES WITHIN AN AXLE FAMILY

| | Parent axle | Family member | | |
|--|--------------|---------------|----|----|
| | | | | |
| | | | | |
| | or axle type | #1 | #2 | #3 |
| | | | | |

^{F3}0.0GENERAL

.....

1.0 SPECIFIC AXLE INFORMATION

| | | | | | | | |
|-----|--------------------|-----|--|-----|-----|-----|--|
| 1.1 | Axle line (SR, HR, | ... | | ... | ... | ... | |
|-----|--------------------|-----|--|-----|-----|-----|--|

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | SP, SRT, HRT) | | | | | | |
|-------|--|-----|-----|-----|-----|-----|-----|
| 1.2 | Axle gear ratio | | ... | | ... | ... | ... |
| 1.3 | Axle housing (number/ID/drawing) | | ... | | ... | ... | ... |
| 1.4 | Gear specifications | ... | | ... | ... | | |
| 1.4.1 | Crown wheel diameter; [mm] | | ... | | ... | | |
| 1.4.2 | Vertical offset pinion/crown wheel; [mm] | ... | | | | | |

1.4.3 Pinion angle with respect to horizontal plane; [°]

1.4.4 For portal axles only:

Angle between pinion axle and crown wheel axle; [°]

1.4.5 Teeth number of pinion

1.4.6 Teeth number of crown gear

1.4.7 Horizontal offset of pinion; [mm]

1.4.8 Horizontal offset of crown wheel; [mm]

1.5 Oil volume; [cm³]

1.6 Oil level; [mm]

1.7 Oil specification

1.8 Bearing type (number/ID/drawing)

1.9 Seal type (main diameter, lip number); [mm]

1.10. Wheel ends (number/ID/drawing)

1.10.1 Bearing type (number/ID/drawing)

1.10.2 Seal type (main diameter, lip number); [mm]

1.10.3 Grease type

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

1.11. Number of planetary/spur gears

1.12. Smallest width of planetary/spur gears; [mm]

1.13. Gear ratio of hub reduction

LIST OF ATTACHMENTS

| No.: | Description: | Date of issue: |
|------|--------------|----------------|
| 1 | ... | ... |
| 2 | ... | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 3

Calculation of the standard torque loss

The standard torque losses for axles are shown in Table 1. The standard table values consist of the sum of a generic constant efficiency value covering the load dependent losses and a generic basic drag torque loss to cover the drag losses at low loads.

Tandem axles shall be calculated using a combined efficiency for an axle including drive-thru (SRT, HRT) plus the matching single axle (SR, HR).

TABLE 1

Generic efficiency and drag loss

| Basic function | Generic efficiency η | Drag torque(wheel side) $T_{d0} = T_0 + T_1 * i_{gear}$ |
|--|---------------------------|---|
| Single reduction axle (SR) | 0,98 | $T_0 = 70 \text{ Nm}$ $T_1 = 20 \text{ Nm}$ |
| Single reduction tandem axle (SRT) / single portal axle (SP) | 0,96 | $T_0 = 80 \text{ Nm}$ $T_1 = 20 \text{ Nm}$ |
| Hub reduction axle (HR) | 0,97 | $T_0 = 70 \text{ Nm}$ $T_1 = 20 \text{ Nm}$ |
| Hub reduction tandem axle (HRT) | 0,95 | $T_0 = 90 \text{ Nm}$ $T_1 = 20 \text{ Nm}$ |

The basic drag torque (wheel side) T_{d0} is calculated by

$$T_{d0} = T_0 + T_1 * i_{gear}$$

using the values from Table 1.

The standard torque loss $T_{loss,std}$ on the wheel side of the axle is calculated by

$$T_{loss,std} = T_{d0} + \frac{T_{out}}{\eta} - T_{out}$$

where:

| | |
|----------------|--|
| $T_{loss,std}$ | = Standard torque loss at the wheel side [Nm] |
| T_{d0} | = Basis drag torque over the complete speed range [Nm] |
| i_{gear} | = Axle gear ratio [-] |
| η | = Generic efficiency for load dependent losses [-] |
| T_{out} | = Output torque [Nm] |

Appendix 4

Family Concept

1. The applicant for a certificate shall submit to the approval authority an application for a certificate for an axle family based on the family criteria as indicated in paragraph 3.

An axle family is characterized by design and performance parameters. These shall be common to all axles within the family. The axle manufacturer may decide which axle belongs to an axle family, as long as the family criteria of paragraph 4 are respected. In addition to the parameters listed in paragraph 4, the axle manufacturer may introduce additional criteria allowing the definition of families of more restricted size. These parameters are not necessarily parameters that have an influence on the level of performance. The axle family shall be approved by the approval authority. The manufacturer shall provide to the approval authority the appropriate information relating to the performance of the members of the axle family.

2. Special cases

In some cases there may be interaction between parameters. This shall be taken into consideration to ensure that only axles with similar characteristics are included within the same axle family. These cases shall be identified by the manufacturer and notified to the approval authority. It shall then be taken into account as a criterion for creating a new axle family.

In case of parameters, which are not listed in paragraph 3 and which have a strong influence on the level of performance, this parameters shall be identified by the manufacturer on the basis of good engineering practice, and shall be notified to the approval authority.

3. Parameters defining an axle family:

- 3.1 Axle category

- (a) Single reduction axle (SR)
- (b) Hub reduction axle (HR)
- (c) Single portal axle (SP)
- (d) Single reduction tandem axle (SRT)
- (e) Hub reduction tandem axle (HRT)
- (f) Same inner axle housing geometry between differential bearings and horizontal plane of centre of pinion shaft according to drawing specification (Exception for single portal axles (SP)). Geometry changes due to an optional integration of a differential lock are permitted within the same axle family. In case of mirror inverted axle casings of axles, the mirror inverted axles can be combined in the same axle family as the origin axles, under the premise, that the bevel gear sets are adapted to the other running direction (change of spiral direction).
- (g) [^{F1}Crown wheel diameter (+ 1,5 %/– 8 % ref. to the largest drawing diameter)]
- (h) Vertical hypoid offset pinion/crown wheel within ± 2 mm
- (i) In case of single portal axles (SP): Pinion angle with respect to horizontal plane within $\pm 5^\circ$
- (j) In case of single portal axles (SP): Angle between pinion axle and crown wheel axle within $\pm 3,5^\circ$

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- (k) In case of hub reduction and single portal axles (HR, HRT, FHR, SP): Same number of planetary gear and spur wheels
 - (l) [^{F1}Gear ratio of every gear step within an axle in a range of 2, as long as only one gear set is changed]
 - (m) Oil level within ± 10 mm or oil volume $\pm 0,5$ litre referring to drawing specification and the installation position in the vehicle
 - (n) Same oil type viscosity grade (recommended factory fill)
 - (o) For all bearings: same bearing rolling/sliding circle diameter (inner/outer) and width within ± 2 mm ref. to drawing
 - (p) [^{F3}]
4. Choice of the parent axle:
- 4.1 The parent axle within an axle family is determined as the axle with the highest axle ratio. In case of more than two axles having the same axle ratio, the manufacturer shall provide an analysis in order to determine the worst-case axle as parent axle.
 - 4.2. The approval authority may conclude that the worst-case torque loss of the family can best be characterized by testing additional axles. In this case, the axle manufacturer shall submit the appropriate information to determine the axle within the family likely to have the highest torque loss level.
 - 4.3. If axles within the family incorporate other features which may be considered to affect the torque losses, these features shall also be identified and taken into account in the selection of the parent axle.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 5

Markings and numbering

1. Markings

In the case of an axle being type approved accordant to this Annex, the axle shall bear:


- 1.1. [F1The manufacturer's name or trade mark]
- 1.2. The make and identifying type indication as recorded in the information referred to in paragraph 0.2 and 0.3 of Appendix 2 to this Annex
- 1.3. The certification mark as a rectangle surrounding the lower-case letter 'e' followed by the distinguishing number of the Member State which has granted the certificate:
 - 1 for Germany;
 - 2 for France;
 - 3 for Italy;
 - 4 for the Netherlands;
 - 5 for Sweden;
 - 6 for Belgium;
 - 7 for Hungary;
 - 8 for the Czech Republic;
 - 9 for Spain;
 - 11 for the United Kingdom;
 - 12 for Austria;
 - 13 for Luxembourg;
 - 17 for Finland;
 - 18 for Denmark;
 - 19 for Romania;
 - 20 for Poland;
 - 21 for Portugal;
 - 23 for Greece;
 - 24 for Ireland;
 - 25 for Croatia;
 - 26 for Slovenia;
 - 27 for Slovakia;
 - 29 for Estonia;
 - 32 for Latvia;
 - 34 for Bulgaria;
 - 36 for Lithuania;
 - 49 for Cyprus;
 - 50 for Malta
- 1.4. The certification mark shall also include in the vicinity of the rectangle the 'base certification number' as specified for Section 4 of the type-approval number set out in Annex VII to Directive 2007/46/EC, preceded by the two figures indicating the sequence number assigned to the latest technical amendment to this Regulation and by a character 'L' indicating that the certificate has been granted for an axle.

For this Regulation, the sequence number shall be 00.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

1.4.1 Example and dimensions of the certification mark

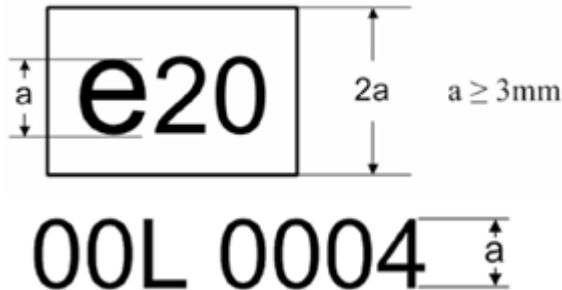

The above certification mark affixed to an axle shows that the type concerned has been approved in Poland (e20), pursuant to this Regulation. The first two digits (00) are indicating the sequence number assigned to the latest technical amendment to this Regulation. The following letter indicates that the certificate was granted for an axle (L). The last four digits (0004) are those allocated by the type-approval authority to the axle as the base certification number.

- 1.5 Upon request of the applicant for a certificate and after prior agreement with the type-approval authority other type sizes than indicated in 1.4.1 may be used. Those other type sizes shall remain clearly legible.
- 1.6 The markings, labels, plates or stickers must be durable for the useful life of the axle and must be clearly legible and indelible. The manufacturer shall ensure that the markings, labels, plates or sticker cannot be removed without destroying or defacing them.
- 1.7 The certification number shall be visible when the axle is installed on the vehicle and shall be affixed to a part necessary for normal operation and not normally requiring replacement during component life.

2. Numbering:

[^{F1}2.1. Certification number for axles shall comprise the following:

eX*YYYY/YYYY*ZZZZ/ZZZZ*L*0000*00

| Section 1 | Section 2 | Section 3 | Additional letter to Section 3 | Section 4 | Section 5 |
|---|--|--|--------------------------------|--------------------------------|---------------|
| Indication of country issuing the certificate | HDV CO ₂ certification Regulation (2017/2400) | Latest amending Regulation (ZZZZ/ZZZZ) | L = Axle | Base certification number 0000 | Extension 00] |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 6

Input parameters for the simulation tool

Introduction

This Appendix describes the list of parameters to be provided by the component manufacturer as input to the simulation tool. The applicable XML schema as well as example data are available at the dedicated electronic distribution platform.

Definitions

| | |
|-------------------------------------|---|
| [^{F1} (1) ‘Parameter ID’: | Unique identifier as used in the simulation tool for a specific input parameter or set of input data] |
| (2) ‘Type’: | Data type of the parameter |
| | string ... sequence of characters in ISO8859-1 encoding |
| | token ... sequence of characters in ISO8859-1 encoding, no leading/trailing whitespace |
| | date ... date and time in UTC time in the format: YYYY-MM-DD $\mathit{THH:MM:SSZ}$ with italic letters denoting fixed characters e.g. ‘2002-05-30 $\mathit{T09:30:10Z}$ ’ |
| | integer ... value with an integral data type, no leading zeros, e.g. ‘1800’ |
| | double, X ... fractional number with exactly X digits after the decimal sign (‘.’) and no leading zeros e.g. for ‘double, 2’: ‘2345.67’; for ‘double, 4’: ‘45.6780’ |
| (3) ‘Unit’ ... | physical unit of the parameter |
| Set of input parameters | |

TABLE 1

Input parameters ‘Axlegear/General’

| Parameter name | Param ID | Type | Unit | Description/Reference |
|-------------------------------------|----------|----------|------|--|
| Manufacturer | P215 | token | [-] | |
| Model | P216 | token | [-] | |
| [^{F1} CertificationNumber | P217 | token | [-] |] |
| Date | P218 | dateTime | [-] | Date and time when the component-hash is created |
| AppVersion | P219 | token | [-] | |
| LineType | P253 | string | [-] | Allowed values: ‘Single reduction axle’, ‘Single portal axle’, ‘Hub reduction axle’, ‘Single reduction tandem axle’, ‘Hub reduction tandem axle’ |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | |
|---------------------|------|-----------|-----|---|
| Ratio | P150 | double, 3 | [-] | |
| CertificationMethod | H256 | string | [-] | Allowed values: 'Measured', 'Standard values' |

TABLE 2

Input parameters 'Axlegear/LossMap' for each grid point in the loss map

| Parameter name | Param ID | Type | Unit | Description/Reference |
|----------------|----------|-----------|---------|-----------------------|
| InputSpeed | P151 | double, 2 | [1/min] | |
| InputTorque | P152 | double, 2 | [Nm] | |
| TorqueLoss | P153 | double, 2 | [Nm] | |

ANNEX VIII

VERIFYING AIR DRAG DATA

1. Introduction

This Annex sets out the test procedure for verifying air drag data.

2. Definitions

For the purposes of this Annex the following definitions shall apply:

- (1) 'Active aero device' means measures which are activated by a control unit to reduce the air drag of the total vehicle.
- (2) 'Aero accessories' mean optional devices which have the purpose to influence the air flow around the total vehicle.
- (3) 'A-pillar' means the connection by a supporting structure between the cabin roof and the front bulkhead.
- (4) 'Body in white geometry' means the supporting structure incl. the windshield of the cabin.
- (5) 'B-pillar' means the connection by a supporting structure between the cabin floor and the cabin roof in the middle of the cabin.
- (6) 'Cab bottom' means the supporting structure of the cabin floor.
- (7) 'Cabin over frame' means distance from frame to cabin reference point in vertical Z. Distance is measured from top of horizontal frame to cabin reference point in vertical Z.
- (8) 'Cabin reference point' means the reference point (X/Y/Z = 0/0/0) from the CAD coordinate system of the cabin or a clearly defined point of the cabin package e.g. heel point.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- (9) 'Cabin width' means the horizontal distance of the left and right B-pillar of the cabin.
- (10) 'Constant speed test' means measurement procedure to be carried out on a test track in order to determine the air drag.
- (11) 'Dataset' means the data recorded during a single passing of a measurement section.
- (12) 'EMS' means the European Modular System (EMS) in accordance with Council Directive 96/53/EC.
- (13) 'Frame height' means distance of wheel center to top of horizontal frame in Z.
- (14) 'Heel point' means the point which is representing the heel of shoe location on the depressed floor covering, when the bottom of shoe is in contact with the undepressed accelerator pedal and the ankle angle is at 87°. (ISO 20176:2011)
- (15) 'Measurement area(s)' means designated part(s) of the test track consisting of at least one measurement section and a preceded stabilisation section.
- (16) 'Measurement section' means a designated part of the test track which is relevant for data recording and data evaluation.
- (17) 'Roof height' means distance in vertical Z from cabin reference point to highest point of roof w/o sunroof

3. Determination of air drag

The constant speed test procedure shall be applied to determine the air drag characteristics. During the constant speed test the main measurement signals driving torque, vehicle speed, air flow velocity and yaw angle shall be measured at two different constant vehicle speeds (low and high speed) under defined conditions on a test track. The measurement data recorded during the constant speed test shall be entered into the air drag pre-processing tool which determines product of drag coefficient by cross sectional area for zero crosswind conditions $C_d \cdot A_{cr}(0)$ as input for the simulation tool. The applicant for a certificate shall declare a value $C_d \cdot A_{declared}$ in a range from equal up to a maximum of + 0,2 m² higher than $C_d \cdot A_{cr}(0)$. The value $C_d \cdot A_{declared}$ shall be the input for the simulation tool CO₂ simulation tool and the reference value for conformity of the certified CO₂ emissions and fuel consumption related properties testing.

[^{F1}Vehicles which are not member of a family shall use the standard values for $C_d \cdot A_{declared}$ as described in Appendix 7 to this Annex. In this case no input data on air drag shall be provided. The allocation of standard values is done automatically by the simulation tool.]

3.1. Test track requirements

3.1.1. The geometry of test track shall be either a:

i. Circuit track (drivable in one direction (*)):

with two measurement areas, one on each straight part, with maximum deviation of less than 20 degrees);

(*) At least for the misalignment correction of the mobile anemometer (see 3.6) the test track has to be driven in both directions

or

ii. Circuit or straight line track (drivable in both directions):

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

with one measurement area (or two with the above named maximum deviation); two options: alternating driving direction after each test section; or after a selectable set of test sections e.g. ten times driving direction 1 followed by ten times driving direction 2.

3.1.2. Measurement sections

On the test track measurement section(s) of a length of 250 m with a tolerance of ± 3 m shall be defined.

3.1.3. Measurement areas

A measurement area shall consist of at least one measurement section and a stabilisation section. The first measurement section of a measurement area shall be preceded by a stabilisation section to stabilise the speed and torque. The stabilisation section shall have a length of minimum 25 m. The test track layout shall enable that the vehicle enters the stabilisation section already with the intended maximum vehicle speed during the test.

Latitude and longitude of start and end point of each measurement section shall be determined with an accuracy of better or equal 0,15 m 95 % Circular Error Probable (DGPS accuracy).

3.1.4. Shape of the measurement sections

The measurement section and the stabilization section have to be a straight line.

3.1.5. Longitudinal slope of the measurement sections

The average longitudinal slope of each measurement and the stabilisation section shall not exceed ± 1 per cent. Slope variations on the measurement section shall not lead to velocity and torque variations above the thresholds specified in 3.10.1.1 items vii. and viii. of this Annex.

3.1.6. Track surface

The test track shall consist of asphalt or concrete. The measurement sections shall have one surface. Different measurement sections are allowed to have different surfaces.

3.1.7. Standstill area

There shall be a standstill area on the test track where the vehicle can be stopped to perform the zeroing and the drift check of the torque measurement system.

3.1.8. Distance to roadside obstacles and vertical clearance

There shall be no obstacles within 5 m distance to both sides of the vehicle. Safety barriers up to a height of 1 m with more than 2,5 m distance to the vehicle are permitted. Any bridges or similar constructions over the measurement sections are not allowed. The test track shall have enough vertical clearance to allow the anemometer installation on the vehicle as specified in 3.4.7 of this Annex.

3.1.9. Altitude profile

The manufacturer shall define whether the altitude correction shall be applied in the test evaluation. In case an altitude correction is applied, for each measurement section the altitude profile shall be made available. The data shall meet the following requirements:

- i. The altitude profile shall be measured at a grid distance of lower or equal than 50 m in driving direction.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- ii. For each grid point the longitude, the latitude and the altitude shall be measured at least at one point ('altitude measurement point') on each side of the centre line of the lane and then be processed to an average value for the grid point.
- iii. The grid points as provided to the air drag pre-processing tool shall have a distance to the centre line of the measurement section of less than 1 m.
- iv. The positioning of the altitude measurement points to the centre line of the lane (perpendicular distance, number of points) shall be chosen in a way that the resulting altitude profile is representative for the gradient driven by the test vehicle.
- v. The altitude profile shall have an accuracy of ± 1 cm or better.
- vi. The measurement data shall not be older than 10 years. A renewal of the surface in the measurement area requires a new altitude profile measurement.

3.2. Requirements for ambient conditions

- 3.2.1. The ambient conditions shall be measured with the equipment specified in 3.4.
- 3.2.2. The ambient temperature shall be in the range of 0 °C to 25 °C. This criterion is checked by the air drag pre-processing tool based on the signal for ambient temperature measured on the vehicle. This criterion only applies to the datasets recorded in the low speed - high speed – low speed sequence and not to the misalignment test and the warm-up phases.
- 3.2.3. The ground temperature shall not exceed 40 °C. This criterion is checked by the air drag pre-processing tool based on the signal for ground temperature measured on the vehicle by an IR Sensor. This criterion only applies to the datasets recorded in the low speed - high speed – low speed sequence and not to the misalignment test and the warm-up phases.
- 3.2.4. The road surface shall be dry during the low speed – high speed - low speed sequence to provide comparable rolling resistance coefficients.
- 3.2.5. The wind conditions shall be within the following range:
 - i. Average wind speed: ≤ 5 m/s
 - ii. Gust wind speed (1s central moving average): ≤ 8 m/sItems i. and ii. are applicable for the datasets recorded in the high speed test and the misalignment calibration test but not for the low speed tests.
- iii. Average yaw angle (β):
 - ≤ 3 degrees for datasets recorded in the high speed test
 - ≤ 5 degrees for datasets recorded during misalignment calibration test

The validity of wind conditions is checked by the air drag pre-processing based on the signals recorded at the vehicle after application of the boundary layer correction. Measurement data collected under conditions exceeding the above named limits are automatically excluded from the calculation.

3.3. Installation of the vehicle

- ^[F]3.3.1. The vehicle chassis shall fit to the dimensions of the standard body or semi-trailer as defined in Appendix 4 of this Annex.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 3.3.2. The vehicle height determined in accordance with 3.5.3.1 item vii. shall be within the limits as specified in Appendix 3 to this Annex.]
- 3.3.3. The minimal distance between cabin and the box or semi-trailer shall be in accordance with manufacturer requirements and body builder instructions of the manufacturer.
- 3.3.4. The cabin and the aero accessories (e.g. spoilers) shall be adapted to best fit to the defined standard body or semi-trailer.
- 3.3.5. The vehicle shall fulfil the legal requirements for a whole vehicle type approval. Equipment which is necessary to execute the constant speed test (e.g. overall vehicle height including anemometer is excluded from this provision).
- 3.3.6. The setup of the semi-trailer shall be as defined in Appendix 4 to this Annex.
- 3.3.7. The vehicle shall be equipped with tyres meeting the following demands:
- i. Best or second best label for rolling resistance which is available at the moment the test is performed
 - ii. Maximum tread depth of 10 mm on the complete vehicle including trailer
 - iii. [^{F1}Tyres inflated to the highest allowable pressure of the tyre manufacturer within a tolerance of $\pm 0,2$ bar]
- 3.3.8. The axle alignment shall be within the manufacturer specifications.
- 3.3.9. No active tyre pressure control systems are allowed to be used during the measurements of the low speed - high speed - low speed tests.
- 3.3.10. If the vehicle is equipped with an active aero device it has to be demonstrated to the approval authority that
- i. The device is always activated and effective to reduce the air drag at vehicle speed over 60 km/h
 - ii. The device is installed and effective in a similar manner on all vehicles of the family.
- If i. and ii. are not applicable the active aero device has to be fully deactivated during the constant speed test.
- 3.3.11. The vehicle shall not have any provisional features, modifications or devices that are aimed only to reduce the air drag value, e.g. sealed gaps. Modifications which aim to align the aerodynamic characteristics of the tested vehicle to the defined conditions for the parent vehicle (e.g. sealing of mounting-holes for sun-roofs) are allowed.
- 3.3.12. All different removable add on parts like sun visors, horns, additional head lights, signal lights or bull bars are not considered in the air drag for the CO₂ regulation. Any such removable add on parts shall be removed from the vehicle before the air drag measurement
- 3.3.13. The vehicle shall be measured without payload.
- 3.4. Measurement equipment

The calibration laboratory shall comply with the requirements of either ISO/TS 16949, ISO 9000 series or ISO/IEC 17025. All laboratory reference measurement equipment, used for calibration and/or verification, shall be traceable to national (international) standards.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

3.4.1. Torque

3.4.1.1. The direct torque at all driven axles shall be measured with one of the following measurement systems:

- a. Hub torque meter
- b. Rim torque meter
- c. Half shaft torque meter

3.4.1.2. The following system requirements shall be met by a single torque meter by calibration:

- i. Non linearity: $< \pm 6$ Nm
- ii. Repeatability: $< \pm 6$ Nm
- iii. Crosstalk: $< \pm 1$ % FSO (only applicable for rim torque meters)
- iv. Measurement rate: ≥ 20 Hz

where:

‘Non linearity’ means the maximum deviation between ideal and actual output signal characteristics in relation to the measurand in a specific measuring range.

‘Repeatability’ means closeness of the agreement between the results of successive measurements of the same measurand carried out under the same conditions of measurement.

‘Crosstalk’ means signal at the main output of a sensor (M_y), produced by a measurand (F_z) acting on the sensor, which is different from the measurand assigned to this output. Coordinate system assignment is defined according to ISO 4130.

‘FSO’ means full scale output of calibrated range.

The recorded torque data shall be corrected for the instrument error determined by the supplier.

3.4.2. Vehicle speed

The vehicle speed is determined by the air drag pre-processing tool based on the CAN-bus front axle signal which is calibrated based on either:

- Option (a) : a reference speed calculated by a delta-time from two fixed opto-electronic barriers (see 3.4.4 of this Annex) and the known length(s) of the measurement section(s) or
- Option (b) : a delta-time determined speed signal from the position signal of a DGPS and the known length(s) of the measurement section(s), derived by the DGPS coordinates

For the vehicle speed calibration the data recorded during the high speed test are used.

3.4.3. Reference signal for calculation of rotational speed of the wheels at the driven axle

For the calculation of rotational speed of the wheels at the driven axle the CAN engine speed signal together with the transmission ratios (gears for low speed test and high speed test, axle ratio) shall be made available. For the CAN engine speed signal it shall be demonstrated that the signal provided to the air drag pre-processing tool is identical to the signal to be used for in-service testing as set out in Annex I of Regulation (EU) No 582/2011.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

For vehicles with torque converter which are not able to drive the low speed test with closed lockup clutch additionally the cardan shaft speed signal and the axle ratio or the average wheel speed signal for the driven axle shall be provided to the air drag pre-processing tool. It shall be demonstrated that the engine speed calculated from this additional signal is within 1 % range compared to the CAN engine speed. This shall be demonstrated for the average value over a measurement section driven at the lowest possible vehicle speed in the torque converter locked mode and at the applicable vehicle speed for the high speed test.

3.4.4. Opto-electronic barriers

The signal of the barriers shall be made available to the air drag pre-processing tool for triggering begin and end of the measurement section and the calibration of the vehicle speed signal. The measurement rate of the trigger signal shall be greater or equal to 100 Hz. Alternatively a DGPS system can be used.

3.4.5. (D)GPS system

Option a) for position measurement only: GPS

Required accuracy:

- i. Position : < 3 m 95 % Circular Error Probable
- ii. Update rate : ≥ 4 Hz

Option b) for vehicle speed calibration and position measurement: Differential GPS system (DGPS)

Required accuracy:

- i. Position : 0,15 m 95 % Circular Error Probable
- ii. Update rate : ≥ 100 Hz

3.4.6. Stationary weather station

Ambient pressure and humidity of the ambient air are determined from a stationary weather station. This meteorological instrumentation shall be positioned in a distance less than 2 000 m to one of the measurement areas, and shall be positioned at an altitude exceeding or equal that of the measurement areas.

Required accuracy:

- i. Temperature : ± 1 °C
- ii. Humidity : ± 5 % RH
- iii. Pressure : ± 1 mbar
- iv. Update rate : ≤ 6 minutes

3.4.7. Mobile anemometer

A mobile anemometer shall be used to measure air flow conditions, i.e. air flow velocity and yaw angle (β) between total air flow and vehicle longitudinal axis.

3.4.7.1. Accuracy requirements

The anemometer shall be calibrated in facility according to ISO 16622. The accuracy requirements according to Table 1 have to be fulfilled:

TABLE 1

Anemometer accuracy requirements

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| Air speed range[m/s] | Accuracy air speed[m/s] | Accuracy yaw angle in yaw angle range of 180 ± 7 degrees[degrees] |
|-----------------------------|--------------------------------|--|
| 20 ± 1 | ± 0,7 | ± 1,0 |
| 27 ± 1 | ± 0,9 | ± 1,0 |
| 35 ± 1 | ± 1,2 | ± 1,0 |

3.4.7.2. Installation position

The mobile anemometer shall be installed on the vehicle in the prescribed position:

(i) X position:

truck: front face ± 0,3 m of the semi-trailer or box-body

(ii) Y position: plane of symmetry within a tolerance ± 0,1 m

(iii) Z position:

The installation height above the vehicle shall be one third of total vehicle height with in a tolerance of 0,0 m to + 0,2 m.

The instrumentation shall be done as exact as possible using geometrical/optical aids. Any remaining misalignment is subject to the misalignment calibration to be performed in accordance with 3.6 of this Annex.

3.4.7.3. The update rate of the anemometer shall be 4 Hz or higher.

3.4.8. Temperature transducer for ambient temperature on vehicle

The ambient air temperature shall be measured on the pole of the mobile anemometer. The installation height shall be maximum 600 mm below the mobile anemometer. The sensor shall be shielded to the sun.

Required accuracy: ± 1 °C

Update rate: ≥ 1 Hz

3.4.9. Proving ground temperature

The temperature of the proving ground shall be recorded on vehicle by means of a contactless IR sensor by wideband (8 to 14 µm). For tarmac and concrete an emissivity factor of 0,90 shall be used. The IR sensor shall be calibrated according to ASTM E2847.

Required accuracy at calibration: Temperature: ± 2,5 °C

Update rate: ≥ 1 Hz

3.5. Constant speed test procedure

On each applicable combination of measurement section and driving direction the constant speed test procedure consisting of the low speed, high speed and low speed test sequence as specified below shall be performed in the same direction.

3.5.1. The average speed within a measurement section in the low speed test shall be a in the range of 10 to 15 km/h.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

3.5.2. The average speed within a measurement section in the high speed test shall be in the following range:
maximum speed: 95 km/h;
minimum speed: 85 km/h or 3 km/h less than the maximum vehicle speed the vehicle can be operated at the test track, whichever value is lower.

3.5.3. The testing shall be performed strictly according to the sequence as specified in 3.5.3.1 to 3.5.3.9 of this Annex.

3.5.3.1. Preparation of vehicle and measurement systems

- (i) Installation of torque meters on the driven axles of the test vehicle and check of installation and signal data according to the manufacturer specification.
- (ii) Documentation of relevant general vehicle data for the official testing template in accordance with 3.7 of this Annex.
- (iii) For the calculation of the acceleration correction by the air drag pre-processing tool the actual vehicle weight shall be determined before the test within a range of ± 500 kg.
- (iv) Check of tyres for the maximum allowable inflation pressure and documentation of tyre pressure values.
- (v) Preparation of opto-electronic barriers at the measurement section(s) or check of proper function of the DGPS system.
- (vi) Installation of mobile anemometer on the vehicle and/or control of the installation, position and orientation. A misalignment calibration test has to be performed every time the anemometer has been mounted newly on the vehicle.
- (vii) [F¹Check of vehicle setup regarding the height and geometry, with running engine. The maximum height of the vehicle shall be determined by measuring at the four corners of the box/semi-trailer.]
- (viii) Adjustment the height of the semi-trailer to the target value and redo determination of maximum vehicle height if necessary.
- (ix) Mirrors or optical systems, roof fairing or other aerodynamic devices shall be in their regular driving condition.

3.5.3.2. Warm-up phase

Drive the vehicle minimum 90 minutes at the target speed of the high speed test to warm-up the system. A repeated warm up (e.g. after a configuration change, an invalid test etc.) shall be at least as long as the standstill time. The warm-up phase can be used to perform the misalignment calibration test as specified in 3.6 of this Annex.

[F²In case it is not possible to maintain high speed for a complete round, e.g. due to curves being too narrow, it is allowed to deviate from target speed requirement during the curves, including the nearby straight portions that are needed for slowing down and accelerating the vehicle.

Deviations shall be minimized as far as possible.

Alternatively, the warm-up phase may be performed on a nearby road, if the target speed is maintained within ± 10 km/h for 90 % of the warm-up time. The part of the warm-up phase used for driving from the road to the standstill area of the test track for zeroing of the torque meters shall be included in the other warm-up phase set out in point 3.5.3.4. The time for this part shall

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

not exceed 20 minutes. The speed and time during the warm-up phase shall be recorded by the measurement equipment.]

3.5.3.3. Zeroing of torque meters

The zeroing of the torque meters shall be performed as follows:

- i. Bring the vehicle to a standstill
- ii. Lift the instrumented wheels off the ground
- iii. Perform the zeroing of the amplifier reading of the torque meters

The standstill phase shall not exceed 10 minutes.

[^{F1}3.5.3.4] Drive another warm-up phase of minimum 10 minutes plus, if applicable, the driving from the road to the standstill area of the test track for zeroing of the torque meters at the target speed of the high speed test. The warm-up phase in accordance with this point shall not exceed 20 minutes.]

3.5.3.5. First low speed test

Perform the first measurement at low speed. It shall be ensured that:

- i. the vehicle is driven through the measurement section along a straight line as straight as possible
- ii. the average driving speed is in accordance with 3.5.1 of this Annex for the measurement section and the preceding stabilisation section
- iii. the stability of the driving speed inside the measurement sections and the stabilisation sections is in accordance with 3.10.1.1 item vii. of this Annex
- iv. the stability of the measured torque inside the measurement sections and the stabilisation sections is in accordance with 3.10.1.1 item viii. of this Annex
- v. the beginning and the end of the measurement sections are clearly recognizable in the measurement data via a recorded trigger signal (opto-electronic barriers plus recorded GPS data) or via use of a DGPS system
- vi. driving at the parts of the test track outside the measurement sections and the preceding stabilisation sections shall be performed without any delay. Any unnecessary manoeuvres shall be avoided during these phases (e.g. driving in sinuous lines)
- vii. the maximum time for the low speed test shall not exceed 20 minutes in order to prevent cool down of the tires.

3.5.3.6. Drive another warm-up phase of minimum 5 minutes at the target speed of the high speed test.

3.5.3.7. High speed test

Perform the measurement at the high speed. It shall be ensured that:

- i. the vehicle is driven through the measurement section along a straight line as straight as possible
- ii. the average driving speed is in accordance with 3.5.2 of this Annex for the measurement section and the preceding stabilisation section

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- iii. the stability of the driving speed inside the measurement sections and the stabilisation sections is in accordance with 3.10.1.1 item vii. of this Annex
- iv. the stability of the measured torque inside the measurement sections and the stabilisation sections is in accordance with 3.10.1.1 item viii. of this Annex
- v. the beginning and the end of the measurement sections are clearly recognizable in the measurement data via a recorded trigger signal (opto-electronic barriers plus recorded GPS data) or via use of a DGPS system
- vi. in the driving phases outside the measurement sections and the preceding stabilization sections any unnecessary manoeuvres shall be avoided (e.g. driving in sinuous lines, unnecessary accelerations or decelerations)
- vii. the distance between the measured vehicle to another driven vehicle on the test track shall be at least 500 m.
- viii. at least 10 valid passings per heading are recorded

The high speed test can be used to determine the misalignment of the anemometer if the provisions stated in 3.6 are fulfilled.

3.5.3.8. Second low speed test

Perform the second measurement at the low speed directly after the high speed test. Similar provisions as for the first low speed test shall be fulfilled.

3.5.3.9. Drift check of torque meters

Directly after the finalisation of the second low speed test the drift check of the torque meters shall be performed in accordance to the following procedure:

1. Bring the vehicle to standstill
2. Lift the instrumented wheels off the ground
3. The drift of each torque meter calculated from the average of the minimum sequence of 10 seconds shall be less than 25 Nm.

Exceeding this limit leads to an invalid test.

3.6. Misalignment calibration test

The misalignment of the anemometer shall be determined by a misalignment calibration test on the test track.

- 3.6.1. At least 5 valid passings of a 250 ± 3 m straight section driven in each direction at high vehicle speed shall be performed.
- 3.6.2. The validity criteria for wind conditions as specified in section 3.2.5 of this Annex and the test track criteria as specified in section 3.1 of this Annex are applicable.
- 3.6.3. The data recorded during the misalignment calibration test shall be used by the air drag pre-processing tool to calculate the misalignment error and perform the according correction. The signals for wheel torques and engine speed are not used in the evaluation.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

3.6.4. The misalignment calibration test can be performed independently from the constant speed test procedure. If the misalignment calibration test is performed separately it shall be executed as follows:

- i. Prepare the opto-electronic barriers at the 250 m ± 3 m section, or check the proper function of the DGPS System.
- ii. Check the vehicle setup regarding the height and geometry in accordance with 3.5.3.1 of this Annex. Adjust the height of the semi-trailer to the requirements as specified in appendix 4 to this Annex if necessary
- iii. No prescriptions for warm-up are applicable
- iv. Perform the misalignment calibration test by at least 5 valid passings as described above.

3.6.5. A new misalignment test shall be performed in the following cases:

- a. the anemometer has been dismantled from the vehicle
- b. the anemometer has been moved
- c. a different tractor or truck is used
- d. [^{F1}the air drag family has been changed]

3.7. Testing Template

In addition to the recording of the modal measurement data, the testing shall be documented in a template which contains at least the following data:

- i. General vehicle description (specifications see Appendix 2 - Information Document)
- ii. Actual maximum vehicle height as determined according to 3.5.3.1 item vii.
- iii. Start time and date of the test
- iv. Vehicle mass within a range of ± 500 kg
- v. Tyre pressures
- vi. Filenames of measurement data
- vii. Documentation of extraordinary events (with time and number of measurement sections), e.g.
 - close passing of another vehicle
 - manoeuvres to avoid accidents, driving errors
 - technical errors
 - measurement errors

3.8. Data processing

3.8.1. The recorded data shall be synchronised and aligned to 100 Hz temporal resolution, either by arithmetical average, nearest neighbour or linear interpolation.

3.8.2. All recorded data shall be checked for any errors. Measurement data shall be excluded from further consideration in the following cases:

- Datasets became invalid due to events during the measurement (see 3.7 item vii)

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- Instrument saturation during the measurement sections (e.g. high wind gusts which might have led to anemometer signal saturation)
 - Measurements in which the permitted limits for the torque meter drift were exceeded
- 3.8.3. For the evaluation of the constant speed tests the application of the latest available version of the air drag pre-processing tool shall be obligatory. Besides the above mentioned data processing, all evaluation steps including validity checks (with exception of the list as specified above) are performed by the air drag pre-processing tool.
- 3.9. [F1Input data for air drag pre-processing tool]

The following tables show the requirements for the measurement data recording and the preparatory data processing for the input into the air drag pre-processing tool:

Table 2 for the vehicle data file

Table 3 for the ambient conditions file

Table 4 for the measurement section configuration file

Table 5 for the measurement data file

Table 6 for the altitude profile files (optional input data)

[F1A detailed description of the requested data formats, the input files and the evaluation principles can be found in the technical documentation of the air drag pre-processing tool.] The data processing shall be applied as specified in section 3.8 of this Annex.

TABLE 2

Input data for the air drag pre-processing tool – vehicle data file

| Input data | Unit | Remarks |
|------------------------------------|------|---|
| Vehicle group code | [-] | 1 - 17 for trucks |
| Vehicle configuration with trailer | [-] | if the vehicle was measured without trailer (input 'No') or with trailer i.e. as a truck/trailer or tractor semitrailer combination (input 'Yes') |
| Vehicle test mass | [kg] | actual mass during measurements |
| [F1Gross vehicle mass | [kg] | gross vehicle mass of the rigid lorry or tractor (w/o trailer or semitrailer)] |
| Axle ratio | [-] | axle transmission ratio ^{ab} |
| Gear ratio high speed | [-] | transmission ratio of gear engaged during high speed test ^a |

a Specification of transmission ratios with at least 3 digits after decimal separator

b If the wheel speed signal is provided to the air drag pre-processing tool (option for vehicles with torque converters, see section 3.4.3 the axle ratio shall be set to '1.000'.

c Input only required if value is lower than 88 km/h.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | |
|-------------------------------|--------|---|
| Gear ratio low speed | [-] | transmission ratio of gear engaged during low speed test ^a |
| Anemometer height | [m] | height above ground of the measurement point of installed anemometer |
| Vehicle height | [m] | maximum vehicle height according to 3.5.3.1 item vii. |
| [^{F1} Gear box type | [-] | manual or automated transmission: ‘SMT’, ‘AMT’, ‘DCT’, automatic transmission with torque converter: ‘APT’] |
| Vehicle maximum speed | [km/h] | maximum speed the vehicle can be practically operated at the test track ^c |

a Specification of transmission ratios with at least 3 digits after decimal separator

b If the wheel speed signal is provided to the air drag pre-processing tool (option for vehicles with torque converters, see section 3.4.3 the axle ratio shall be set to ‘1.000’.

c Input only required if value is lower than 88 km/h.

TABLE 3

Input data for the air drag pre-processing tool – ambient conditions file

| Signal | Column identifier in input file | Unit | Measurement rate | Remarks |
|-----------------------|---------------------------------|---------------------------------|---|----------------------------|
| Time | <t> | [s] since day start (first day) | — | — |
| Ambient temperature | <t_amb_stat> | [°C] | At least 1 averaged value per 6 minutes | Stationary weather station |
| Ambient pressure | <p_amb_stat> | [mbar] | | Stationary weather station |
| Relative air humidity | <rh_stat> | [%] | | Stationary weather station |

^{F1}TABLE 4

Input data for air drag pre-processing tool – measurement section configuration file]

| Input data | Unit | Remarks |
|------------------------|------|---|
| Trigger signal used | [-] | 1 = trigger signal used; 0 = no trigger signal used |
| Measurement section ID | [-] | user defined ID number |
| Driving direction ID | [-] | user defined ID number |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | |
|---------------------------------------|------------------------------------|---|
| Heading | [°] | heading of the measurement section |
| Length of the measurement section | [m] | — |
| Latitude start point of section | decimal degrees or decimal minutes | standard GPS, unit decimal degrees: minimum 5 digits after decimal separator |
| Longitude start point of section | | standard GPS, unit decimal minutes: minimum 3 digits after decimal separator |
| Latitude end point of section | | DGPS, unit decimal degrees: minimum 7 digits after decimal separator |
| Longitude end point of section | | DGPS, unit decimal minutes: minimum 5 digits after decimal separator |
| Path and/or filename of altitude file | [-] | only required for the constant speed tests (not the misalignment test) and if the altitude correction is enabled. |

TABLE 5

Input data for the air drag pre-processing tool – measurement data file

| Signal | Column identifier in input file | Unit | Measurement rate | Remarks |
|------------------|---------------------------------|------------------------------------|---|---|
| Time | <t> | [s] since day start (of first day) | 100 Hz | rate fixed to 100 Hz; time signal used for correlation with weather data and for check of frequency |
| (D)GPS latitude | <lat> | decimal degrees or decimal minutes | GPS: ≥ 4 Hz DGPS: ≥ 100 Hz | standard GPS, unit decimal degrees: minimum 5 digits after decimal separator |
| (D)GPS longitude | <long> | | | standard GPS, unit decimal minutes: minimum 3 digits after |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | |
|---------------------------------------|------------------------|--------|---------|---|
| | | | | decimal separator DGPS, unit decimal degrees: minimum 7 digits after decimal separator DGPS, unit decimal minutes: minimum 5 digits after decimal separator |
| (D)GPS heading | <hdg> | [°] | ≥ 4Hz | |
| DGPS velocity | <v_veh_GPS> | [km/h] | ≥ 20 Hz | |
| Vehicle velocity | <v_veh_CAN> | [km/h] | ≥ 20 Hz | raw CAN bus front axle signal |
| Air speed | <v_air> | [m/s] | ≥ 4 Hz | raw data (instrument reading) |
| Inflow angle (beta) | <beta> | [°] | ≥ 4 Hz | raw data (instrument reading); '180°' refers to air flow from front |
| Engine speed or cardan speed | <n_eng> or <n_card> | [rpm] | ≥ 20 Hz | cardan speed for vehicles with torque converter not locked during low speed test |
| Torque meter (left wheel) | <tq_l> | [Nm] | ≥ 20 Hz | — |
| Torque meter (right wheel) | <tq_r> | [Nm] | ≥ 20 Hz | |
| Ambient temperature on vehicle | <t_amb_veh> | [°C] | ≥ 1 Hz | |
| Trigger signal | <trigger> | [-] | 100 Hz | optional signal; required if measurement sections are identified by opto electronic barriers (option 'trigger_used=1') |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | |
|-----------------------------------|------------|------|--------|---|
| Proving ground temperature | <t_ground> | [°C] | ≥ 1 Hz | |
| Validity | <valid> | [-] | — | optional signal (1=valid; 0=invalid); |

TABLE 6

Input data for the air drag pre-processing tool – altitude profile file

| Input data | Unit | Remarks |
|------------|------------------------------------|---|
| Latitude | decimal degrees or decimal minutes | unit decimal degrees: minimum 7 digits after decimal separator |
| Longitude | | unit decimal minutes: minimum 5 digits after decimal separator |
| Altitude | [m] | minimum 2 digits after decimal separator |

3.10. Validity criteria

This sections sets out the criteria to obtain valid results in the air drag pre-processing tool.

3.10.1. Validity criteria for the constant speed test

3.10.1.1. The air drag pre-processing tool accepts datasets as recorded during the constant speed test in case the following validity criteria are met:

- i. the average vehicle speed is inside the criteria as defined in 3.5.2
- ii. the ambient temperature is inside the range as described in 3.2.2. This criterion is checked by the air drag pre-processing tool based on the ambient temperature measured on the vehicle.
- iii. the proving ground temperature is in the range as described in 3.2.3
- iv. valid average wind speed conditions according to point 3.2.5 item i
- v. valid gust wind speed conditions according to point 3.2.5 item ii
- vi. valid average yaw angle conditions according to point 3.2.5 item iii
- vii. stability criteria for vehicle speed met:

Low speed test:

$$(v_{lms,avg} - 0,5 \text{ km / h}) \leq v_{lm,avg} \leq (v_{lms,avg} + 0,5 \text{ km / h})$$

where:

$v_{lms,avg}$ = average of vehicle speed per measurement section [km/h]

$v_{lm,avg}$ = central moving average of vehicle speed with X_{ms} seconds time base [km/h]

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

X_{ms} = time needed to drive 25 m distance at actual vehicle speed [s]

High speed test:

$$(v_{hms,avrg} - 0,3 \text{ km / h}) \leq v_{hm,avrg} \leq (v_{hms,avrg} + 0,3 \text{ km / h})$$

where:

$v_{hms,avrg}$ = average of vehicle speed per measurement section [km/h]

$v_{hm,avrg}$ = 1 s central moving average of vehicle speed [km/h]

viii. stability criteria for vehicle torque met:

Low speed test:

$$(T_{lms,avrg} - T_{grd}) \times 0,7 \leq (T_{lm,avrg} - T_{grd}) \leq (T_{lms,avrg} - T_{grd}) \times 1,3$$

$$T_{grd} = F_{grd,avrg} \times r_{dyn,avrg}$$

where:

$T_{lms,avrg}$ = average of T_{sum} per measurement section

T_{grd} = average torque from gradient force

$F_{grd,avrg}$ = average gradient force over measurement section

$r_{dyn,avrg}$ = average effective rolling radius over measurement section (formula see item ix.) [m]

T_{sum} = $T_L + T_R$; sum of corrected torque values left and right wheel [Nm]

$T_{lm,avrg}$ = central moving average of T_{sum} with X_{ms} seconds time base

X_{ms} = time needed to drive 25 m distance at actual vehicle speed [s]

High speed test

$$(T_{hms,avrg} - T_{grd}) \times 0,8 \leq (T_{hm,avrg} - T_{grd}) \leq (T_{hms,avrg} - T_{grd}) \times 1,2$$

where:

$T_{hms,avrg}$ = average of T_{sum} per measurement section [Nm]

T_{grd} = average torque from gradient force (see Low speed test) [Nm]

T_{sum} = $T_L + T_R$; sum of corrected torque values left and right wheel [Nm]

$T_{hm,avrg}$ = 1 s central moving average of T_{sum} [Nm]

ix. valid heading of the vehicle passing a measurement section (< 10° deviation from target heading applicable for low speed test, high speed test and misalignment test)

x. driven distance inside measurement section calculated from the calibrated vehicle speed does not differ from target distance by more than 3 meters (applicable for low speed test and high speed test)

xi. [F1]plausibility check for engine speed or cardan speed whichever is applicable passed:

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Engine speed check for high speed test:

$$\frac{30 \times i_{gear} \times i_{axle} \times \frac{(v_{hms,avrg} - 0.3)}{3.6}}{r_{dyn,ref,HS} \times \pi} \times (1 - 0,02) \leq n_{eng,1s} \leq \frac{30 \times i_{gear} \times i_{axle} \times \frac{(v_{hms,avrg} + 0.3)}{3.6}}{r_{dyn,ref,HS} \times \pi} \times (1 + 0,02)$$

$$r_{dyn,avrg} = \frac{30 \times i_{gear} \times i_{axle} \times \frac{v_{hms,avrg}}{3.6}}{n_{eng,avrg} \times \pi}$$

$$r_{dyn,ref,HS} = \frac{1}{n} \sum_{j=1}^n r_{dyn,avrg,j}$$

where:

| | | |
|------------------|---|---|
| i_{gear} | = | transmission ratio of the gear selected in high speed test [-] |
| i_{axle} | = | axle transmission ratio [-] |
| $v_{hms,avrg}$ | = | average vehicle speed (high speed measurement section) [km/h] |
| $n_{eng,1s}$ | = | 1 s central moving average of engine speed (high speed measurement section) [rpm] |
| $n_{eng,avrg}$ | = | average engine speed (high speed measurement section) [rpm] |
| $r_{dyn,avrg}$ | = | average effective rolling radius for a single high speed measurement section [m] |
| $r_{dyn,ref,HS}$ | = | reference effective rolling radius calculated from all valid high speed measurement sections (number = n) [m] |

Engine speed check for low speed test:

$$\frac{30 \times i_{gear} \times i_{axle} \times \frac{(v_{lms,avrg} - 0.3)}{3.6}}{r_{dyn,ref,LS1/LS2} \times \pi} \times (1 - 0,02) \leq n_{eng,float} \leq \frac{30 \times i_{gear} \times i_{axle} \times \frac{(v_{lms,avrg} + 0.3)}{3.6}}{r_{dyn,ref,LS1/LS2} \times \pi} \times (1 + 0,02)$$

$$r_{dyn,avrg} = \frac{30 \times i_{gear} \times i_{axle} \times \frac{v_{lms,avrg}}{3.6}}{n_{eng,avrg} \times \pi}$$

$$r_{dyn,ref,LS1/LS2} = \frac{1}{n} \sum_{j=1}^n r_{dyn,avrg,j}$$

where:

| | | |
|-----------------|---|--|
| i_{gear} | = | transmission ratio of the gear selected in low speed test [-] |
| i_{axle} | = | axle transmission ratio [-] |
| $v_{lms,avrg}$ | = | average vehicle speed (low speed measurement section) [km/h] |
| $n_{eng,float}$ | = | central moving average of engine speed with X_{ms} seconds time base (low speed measurement section) [rpm] |
| $n_{eng,avrg}$ | = | average engine speed (low speed measurement section) [rpm] |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | |
|-----------------------|---|---|
| X_{ms} | = | time needed to drive 25 metre distance at low speed [s] |
| $r_{dyn,avg}$ | = | average effective rolling radius for a single low speed measurement section [m] |
| $r_{dyn,ref,LS1/LS2}$ | = | reference effective rolling radius calculated from all valid measurement sections for low speed test 1 or low speed test 2 (number = n) [m] |

The plausibility check for cardan speed is performed in an analogue way with $n_{eng,ls}$ replaced by $n_{card,ls}$ (1 s central moving average of cardan speed in the high speed measurement section) and $n_{eng,float}$ replaced by $n_{card,float}$ (moving average of cardan speed with X_{ms} seconds time base in the low speed measurement section) and i_{gear} set to a value of 1.]

- xii. the particular part of the measurement data was not marked as ‘invalid’ in the air drag pre-processing tool input file.
- 3.10.1.2. The air drag pre-processing tool excludes single datasets from the evaluation in the case of unequal number of datasets for a particular combination of measurement section and driving direction for the first and the second low speed test. In this case the first datasets from the low speed run with the higher number of datasets are excluded.
- 3.10.1.3. The air drag pre-processing tool excludes single combinations of measurement sections and driving directions from the evaluation if:
- i. no valid dataset is available from low speed test 1 or/and low speed test 2
 - ii. less than two valid datasets from the high speed test are available
- 3.10.1.4. The air drag pre-processing tool considers the complete constant speed test invalid in the following cases:
- i. test track requirements as described in 3.1.1 not met
 - ii. less than 10 datasets per heading available (high speed test)
 - iii. less than 5 valid datasets per heading available (misalignment calibration test)
 - iv. the rolling resistance coefficients (RRC) for the first and the second low speed test differ more than 0,40 kg/t. This criterion is checked for each combination of measurement section and driving direction separately.
- 3.10.2. Validity criteria for the misalignment test
- 3.10.2.1. The air drag pre-processing tool accepts datasets as recorded during the misalignment test in case the following validity criteria are met:
- i. the average vehicle speed is inside the criteria as defined in 3.5.2 for the high speed test
 - ii. valid average wind speed conditions according to point 3.2.5 item i
 - iii. valid gust wind speed conditions according to point 3.2.5 item ii
 - iv. valid average yaw angle conditions according to point 3.2.5 item iii
 - v. stability criteria for vehicle speed met:

$$(v_{hms,avg} - 1 \text{ km/h}) \leq v_{hms,avg} \leq (v_{hms,avg} + 1 \text{ km/h})$$

where:

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

$v_{hms,avrg}$ = average of vehicle speed per measurement section [km/h]

$v_{hm,avrg}$ = 1 s central moving average of vehicle speed [km/h]

3.10.2.2. The air drag pre-processing tool considers the data from a single measurement section invalid in the following cases:

- i. the average vehicle speeds from all valid datasets from each driving directions differ by more than 2 km/h.
- ii. less than 5 datasets per heading available

3.10.2.3. The air drag pre-processing tool considers the complete misalignment test invalid in case no valid result for a single measurement section is available.

3.11. Declaration of air drag value

Base value for the declaration of the air drag value is the final result for $C_d \cdot A_{cr}(0)$ as calculated by the air drag pre-processing tool. The applicant for a certificate shall declare a value $C_d \cdot A_{declared}$ in a range from equal up to a maximum of + 0,2 m² higher than $C_d \cdot A_{cr}(0)$. This tolerance shall take into account uncertainties in the selection of the parent vehicles as the worst case for all testable members of the family. The value $C_d \cdot A_{declared}$ shall be the input for the simulation tool and the reference value for conformity of the certified CO₂ emissions and fuel consumption related properties testing.

[^{F1}Several declared values $C_d \cdot A_{declared}$ can be created based on a single measured $C_d \cdot A_{cr}(0)$ as long as the family provisions in accordance with point 4 of Appendix 5 are fulfilled.]

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 1

MODEL OF A CERTIFICATE OF A COMPONENT, SEPARATE TECHNICAL UNIT OR SYSTEM

Maximum format: A4 (210 × 297 mm)

CERTIFICATE ON CO₂ EMISSIONS AND FUEL CONSUMPTION RELATED PROPERTIES OF AN AIR DRAG FAMILY

| | |
|-----------------------------|----------------------|
| Communication concerning: | Administration stamp |
| — granting ⁽¹⁾ | |
| — extension ⁽¹⁾ | |
| — refusal ⁽¹⁾ | |
| — withdrawal ⁽¹⁾ | |

of a certificate on CO₂ emission and fuel consumption related properties of an air drag family in accordance with Commission Regulation (EU) 2017/2400.

Commission Regulation (EU) 2017/2400 as last amended by ...

Certification number:

Hash:

Reason for extension:

SECTION 1.

I

Make (trade name of manufacturer):

0.2. Vehicle body and air drag type/family (if applicable):

0.3. Vehicle body and air drag family member (in case of family)

0.3.1. Vehicle body and air drag parent

0.3.2. Vehicle body and air drag types within the family

0.4. Means of identification of type, if marked

0.4.1. Location of the marking:

0.5. Name and address of manufacturer:

0.6. In the case of components and separate technical units, location and method of affixing of the EC certification mark:

0.7. Name(s) and address(es) of assembly plant(s):

0.9. Name and address of the manufacturer's representative (if any)

SECTION 2.

II

Additional information (where applicable): see Addendum

2. Approval authority responsible for carrying out the tests:

3. Date of test report:

4. Number of test report:

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

5. Remarks (if any): see Addendum
6. Place:
7. Date:
8. Signature:

Attachments:

Information package. Test report.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

[^{F1}Appendix 2

Air drag information document

| | |
|-----------------------|-------------------------------|
| Description sheet No: | Issue: from: Amendment: |
|-----------------------|-------------------------------|

pursuant to ...

Air Drag type or family (if applicable):

General remark: For simulation tool input data an electronic file format needs to be defined which can be used for data import to the simulation tool. The simulation tool input data may differ from the data requested in the information document and vice versa (to be defined). A data file is especially necessary wherever large data such as efficiency maps need to be handled (no manual transfer/input necessary).

...

- 0.0. GENERAL
- 0.1. Name and address of manufacturer
- 0.2. Make (trade name of manufacturer)
- 0.3. Air drag type (family if applicable)
- 0.4. Commercial name(s) (if available)
- 0.5. Means of identification of type, if marked on the vehicle
- 0.6. In the case of components and separate technical units, location and method of affixing of the certification mark
- 0.7. Name(s) and address(es) of assembly plant(s)
- 0.8. Name and address of the manufacturer's representative

PART 1

ESSENTIAL CHARACTERISTICS OF THE (PARENT) AIR DRAG AND THE AIR DRAG TYPES WITHIN AN AIR DRAG FAMILY

| | | | | | |
|--|-------------------------|-----------------------|-----------|-----------|--|
| | Parent air drag | Family members | | | |
| | or air drag type | #1 | #2 | #3 | |

- 1.0. SPECIFIC AIR DRAG INFORMATION
- 1.1.0. VEHICLE
- 1.1.1. HDV group according to HDV CO₂ scheme

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 1.2.0. Vehicle model
- 1.2.1. Axle configuration
- 1.2.2. Max. gross vehicle weight
- 1.2.3. Cabin line
- 1.2.4. Cabin width (max. value in Y direction)
- 1.2.5. Cabin length (max. value in X direction)
- 1.2.6. Roof height
- 1.2.7. Wheel base
- 1.2.8. Height cabin over frame
- 1.2.9. Frame height
- 1.2.10. Aerodynamic accessories or add-ons (e.g. roof spoiler, side extender, side skirts, corner vanes)
- 1.2.11. Tyre dimensions front axle
- 1.2.12. Tyre dimensions driven axles(s)
- 1.3. Body specifications (according to standard body definition)
- 1.4. (Semi-) Trailer specifications (according to (semi-) trailer specification by standard body)
- 1.5. Parameter defining the family in accordance with the description of the applicant (parent criteria and deviated family criteria)

LIST OF ATTACHMENTS

| No: | Description: | Date of issue: |
|-----|--------------------------------|----------------|
| 1. | Information on test conditions | ... |
| 2. | ... | |

Attachment 1 to Information Document Information on test conditions (if applicable)

- 1.1. Test track on which tests have been conducted
- 1.2. Total vehicle mass during measurement [kg]
- 1.3. Maximum vehicle height during measurement [m]
- 1.4. Average ambient conditions during first low speed test [°C]
- 1.5. Average vehicle speed during high speed tests [km/h]
- 1.6. Product of drag coefficient (C_d) by cross sectional area (A_{cr}) for zero crosswind conditions $C_d A_{cr}(0)$ [m²]

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 1.7. Product of drag coefficient (C_d) by cross sectional area (A_{cr}) for average crosswind conditions during constant speed test $C_d A_{cr}(\beta)$ [m²]
- 1.8. Average yaw angle during constant speed test β [°]
- 1.9. Declared air drag value $C_d A_{declared}$ [m²]
- 1.10. Version number of air drag pre-processing tool]

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 3

Vehicle height requirements

1. Vehicles measured in the constant speed test according to section 3 of this Annex have to meet the vehicle height requirements as shown in Table 7.
2. The vehicle height has to be determined as described in 3.5.3.1 item vii
3. Vehicles of vehicles groups not shown in Table 7 are not subject to constant speed testing.

TABLE 7

Vehicle Height Requirements

| Vehicle group | Minimum vehicle height [m] | Maximum vehicle height [m] |
|------------------|--|----------------------------|
| 1 | 3,40 | 3,60 |
| 2 | 3,50 | 3,75 |
| 3 | 3,70 | 3,90 |
| 4 | 3,85 | 4,00 |
| 5 | 3,90 | 4,00 |
| [^{F19} | similar values as for rigid lorry with same maximum gross vehicle weight (group 1, 2, 3 or 4)] | |
| 10 | 3,90 | 4,00 |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 4

Standard body and semitrailer configurations

1. Vehicles measured in the constant speed test according to section 3 of this Annex have to fulfill the requirements on standard bodies and standard semitrailer as described in this Appendix.
2. The applicable standard body or semitrailer shall be determined from Table 8.

Table 8

| Allocation of standard bodies and semitrailer for constant speed testing | |
|--|--|
| Vehicle group | Standard body or trailer |
| 1 | B1 |
| 2 | B2 |
| 3 | B3 |
| 4 | B4 |
| 5 | ST1 |
| 9 | depending on maximum gross vehicle weight: 7,5 – 10t: B1 > 10 – 12t: B2 > 12 – 16t: B3 > 16t: B5 |
| 10 | ST1 |

3. The standard bodies B1, B2, B3, B4 and B5 shall be constructed as a hard shell body in dry-out box design. They shall be equipped with two rear doors and without any side doors. The standard bodies shall not be equipped with tail lifts, front spoilers or side fairings for reduction of aerodynamic drag. The specifications of the standard bodies are given in:
Table 9 for standard body ‘B1’
Table 10 for standard body ‘B2’
Table 11 for standard body ‘B3’
Table 12 for standard body ‘B4’
Table 13 for standard body ‘B5’

Mass indications as given in Table 9 to Table 13 are not subject to inspection for air drag testing.

4. The type and chassis requirements for the standard semitrailer ST1 are listed in Table 14. The specifications are given in Table 15.
5. All dimensions and masses without tolerances mentioned explicitly shall be in line with Regulation (EC) No 1230/2012, Annex 1, Appendix 2 (i.e. in the range of $\pm 3\%$ of the target value).

TABLE 9

Specifications of standard body ‘B1’

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| Specification | Unit | External dimension(tolerance) | Remarks |
|--|-------------|--------------------------------------|---|
| Length | [mm] | 6 200 | |
| Width | [mm] | 2 550 (– 10) | |
| Height | [mm] | 2 680 (± 10) | box: external height: 2 560 longitudinal beam: 120 |
| Corner radius side & roof with front panel | [mm] | 50 - 80 | |
| Corner radius side with roof panel | [mm] | 50 - 80 | |
| Remaining corners | [mm] | broken with radius ≤ 10 | |
| Mass | [kg] | 1 600 | has not be verified during air drag testing |

TABLE 10

Specifications of standard body ‘B2’

| Specification | Unit | External dimension(tolerance) | Remarks |
|--|-------------|--------------------------------------|---|
| Length | [mm] | 7 400 | |
| Width | [mm] | 2 550 (– 10) | |
| Height | [mm] | 2 760 (± 10) | box: external height: 2 640 longitudinal beam: 120 |
| Corner radius side & roof with front panel | [mm] | 50 - 80 | |
| Corner radius side with roof panel | [mm] | 50 - 80 | |
| Remaining corners | [mm] | broken with radius ≤ 10 | |
| Mass | [kg] | 1 900 | has not be verified during air drag testing |

TABLE 11

Specifications of standard body ‘B3’

| Specification | Unit | External dimension(tolerance) | Remarks |
|----------------------|-------------|--------------------------------------|----------------|
| Length | [mm] | 7 450 | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | |
|--|------|------------------------------|---|
| Width | [mm] | 2 550 (– 10) | legal limit (96/53/EC), internal \geq 2 480 |
| Height | [mm] | 2 880 (\pm 10) | box: external height: 2 760 longitudinal beam: 120 |
| Corner radius side & roof with front panel | [mm] | 50 - 80 | |
| Corner radius side with roof panel | [mm] | 50 - 80 | |
| Remaining corners | [mm] | broken with radius \leq 10 | |
| Mass | [kg] | 2 000 | has not be verified during air drag testing |

TABLE 12

Specifications of standard body ‘B4’

| Specification | Unit | External dimension(tolerance) | Remarks |
|--|------|-------------------------------|---|
| Length | [mm] | 7 450 | |
| Width | [mm] | 2 550 (– 10) | |
| Height | [mm] | 2 980 (\pm 10) | box: external height: 2 860 longitudinal beam: 120 |
| Corner radius side & roof with front panel | [mm] | 50 - 80 | |
| Corner radius side with roof panel | [mm] | 50 - 80 | |
| Remaining corners | [mm] | broken with radius \leq 10 | |
| Mass | [kg] | 2 100 | has not be verified during air drag testing |

TABLE 13

Specifications of standard body ‘B5’

| Specification | Unit | External dimension(tolerance) | Remarks |
|---------------|------|-------------------------------|-------------------------|
| Length | [mm] | 7 820 | internal \geq 7 650 |
| Width | [mm] | 2 550 (– 10) | legal limit (96/53/EC), |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | |
|--|------|------------------------------|---|
| | | | internal $\geq 2\,460$ |
| Height | [mm] | 2 980 (± 10) | box: external height: 2 860 longitudinal beam: 120 |
| Corner radius side & roof with front panel | [mm] | 50 - 80 | |
| Corner radius side with roof panel | [mm] | 50 - 80 | |
| Remaining corners | [mm] | broken with radius ≤ 10 | |
| Mass | [kg] | 2 200 | has not be verified during air drag testing |

TABLE 14

Type and chassis configuration of standard semitrailer 'ST1'

| Type of trailer | 3-axle semi-trailer w/o steering axle(s) |
|-----------------------|--|
| Chassis configuration | <ul style="list-style-type: none"> — End to end ladder frame — Frame w/o underfloor cover — 2 stripes at each side as underride protection — Rear underride protection (UPS) — Rear lamp holder plate w/o pallet box — Two spare wheels after the 3rd axle — One toolbox at the end of the body before UPS (left or right side) — Mud flaps before and behind axle assembly — Air suspension — Disc brakes — Tyre size: 385/65 R 22,5 — 2 back doors — w/o side door(s) — w/o tail lift — w/o front spoiler — w/o side fairings for aero |

TABLE 15

[^{F1}Specifications standard semitrailer 'ST1']

| Specification | Unit | External dimension(tolerance) | Remarks |
|--------------------------|------|-------------------------------|---------|
| Total length | [mm] | 13 685 | |
| Total width (Body width) | [mm] | 2 550 ($- 10$) | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | |
|-----------------------------------|------|---|--|
| Body height | [mm] | 2 850 (± 10) | max. full height: 4 000 (96/53/EC) |
| Full height, unloaded | [mm] | 4 000 ($- 10$) | height over the complete length specification for semi-trailer, not relevant for checking of vehicle height during constant speed test |
| Trailer coupling height, unloaded | [mm] | 1 150 | specification for semitrailer, not subject to inspection during constant speed test |
| Wheelbase | [mm] | 7 700 | |
| Axle distance | [mm] | 1 310 | 3-axle assembly, 24t (96/53/EC) |
| Front overhang | [mm] | 1 685 | radius: 2 040 (legal limit, 96/53/EC) |
| Front wall | | | flat wall with attachments for compressed air and electricity |
| Corner front/side panel | [mm] | broken with a strip and edge radii ≤ 5 | secant of a circle with the kingpin as centre and a radius of 2 040 (legal limit, 96/53/EC) |
| Remaining corners | [mm] | broken with radius ≤ 10 | |
| Toolbox dimension vehicle x-axis | [mm] | 655 | Tolerance: ± 10 % of target value |
| Toolbox dimension vehicle y-axis | [mm] | 445 | Tolerance: ± 5 % of target value |
| Toolbox dimension vehicle z-axis | [mm] | 495 | Tolerance: ± 5 % of target value |
| Side underride protection length | [mm] | 3 045 | 2 stripes at each side, acc. ECE- R 73, Amendment 01 (2010), ± 100 depending on wheelbase |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | |
|--------------------------------|--------------------|----------|--|
| Stripe profile | [mm ²] | 100 × 30 | ECE- R 73, Amendment 01 (2010) |
| Technical gross vehicle weight | [kg] | 39 000 | legal GVWR: 24 000 (96/53/EC) |
| Vehicle curb weight | [kg] | 7 500 | has not be verified during air drag testing |
| Allowable axle load | [kg] | 24 000 | legal limit (96/53/EC) |
| Technical axle load | [kg] | 27 000 | 3 × 9 000 |

Appendix 5

Air drag family for trucks

1. General

An air drag family is characterized by design and performance parameters. These shall be common to all vehicles within the family. The manufacturer may decide which vehicles belong to an air drag family as long as the membership criteria listed in paragraph 4 are respected. The air drag family shall be approved by the approval authority. The manufacturer shall provide to the approval authority the appropriate information relating to the air drag of the members of the air drag family.

2. Special cases

In some cases there may be interaction between parameters. This shall be taken into consideration to ensure that only vehicles with similar characteristics are included within the same air drag family. These cases shall be identified by the manufacturer and notified to the approval authority. It shall then be taken into account as a criterion for creating a new air drag family.

In addition to the parameters listed in paragraph 4, the manufacturer may introduce additional criteria allowing the definition of families of more restricted size.

F³.

4. Parameter defining the air drag family:

4.1. Vehicles are allowed to be grouped within a family if the following criteria are fulfilled:



- (a) Same cabin width and body in white geometry up to B-pillar and above the heel point excluding the cab bottom (e.g. engine tunnel). All members of the family stay within a range of ± 10 mm to the parent vehicle.
- (b) Same roof height in vertical Z. All members of the family stay within a range of ± 10 mm to the parent vehicle.
- (c) Same height of cabin over frame. This criterion is fulfilled if the height difference of the cabins over frame stays within $Z < 175$ mm.

The fulfillment of the family concept requirements shall be demonstrated by CAD (computer-aided design) data.

Figure 1 Family definition

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

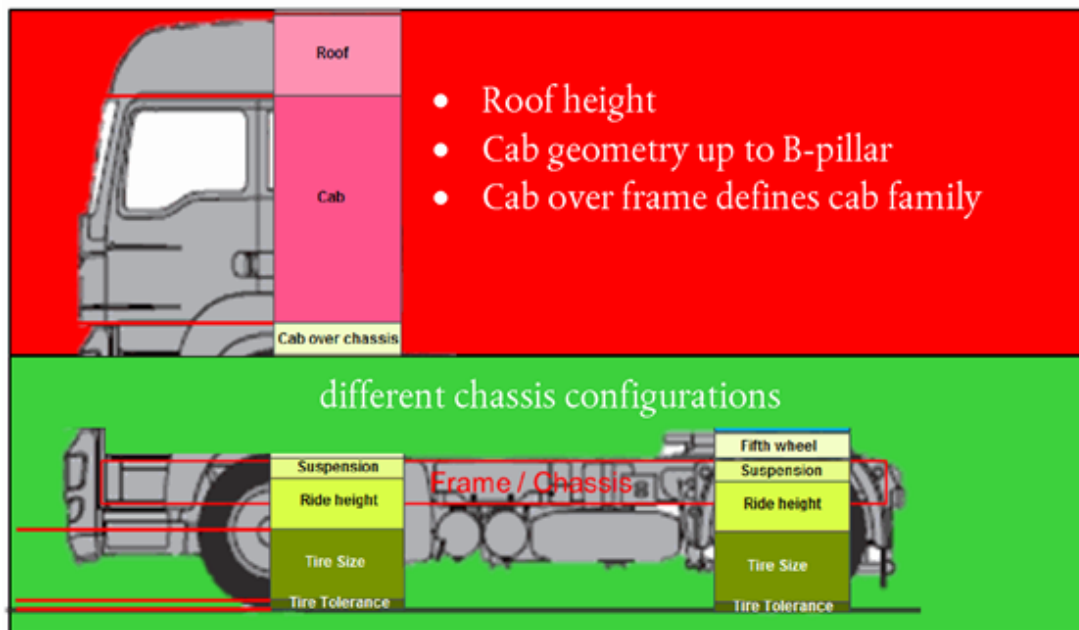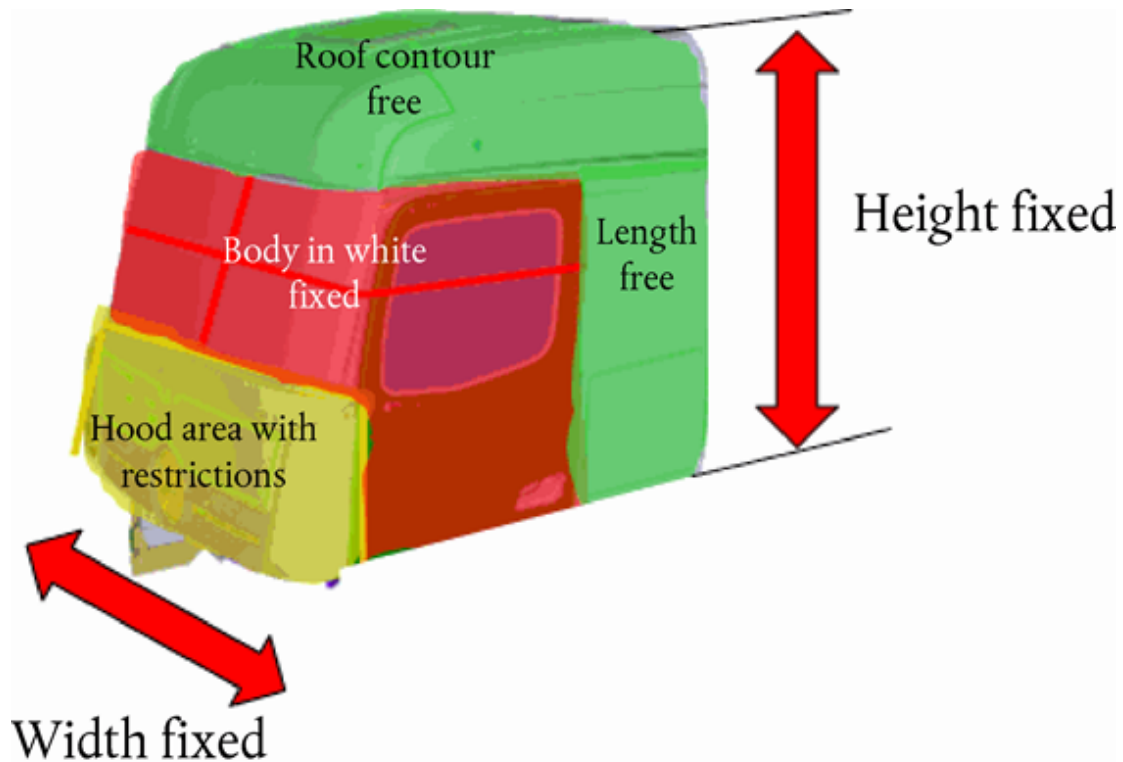

- 4.2. An air drag family consist of testable members and vehicle configurations which can not be tested in accordance with this regulation.
- 4.3. Testable members of a family are vehicle configurations, which fulfil the installation requirements as defined in 3.3 in the main part of this Annex.
5. Choice of the air drag parent vehicle

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 5.1. The parent vehicle of each family shall be selected according to the following criteria:
- 5.2. The vehicle chassis shall fit to the dimensions of the standard body or semi-trailer as defined in Appendix 4 of this Annex.
- 5.3. All testable members of the family shall have an equal or lower air drag value than the value $C_d \cdot A_{\text{declared}}$ declared for the parent vehicle.
- 5.4. The applicant for a certificate shall be able to demonstrate that the selection of the parent vehicle meets the provisions as stated in 5.3 based on scientific methods e.g. CFD, wind tunnel results or good engineering practice. This provision applies for all vehicle variants which can be tested by the constant speed procedure as described in this Annex. Other vehicle configurations (e.g. vehicle heights not in accordance with the provisions in Appendix 4, wheel bases not compatible with the standard body dimensions of Appendix 5) shall get the same air drag value as the testable parent within the family without any further demonstration. As tires are considered as part of the measurement equipment, their influence shall be excluded in proving the worst case scenario.
- [^{F1}5.5. The declared value $C_d \cdot A_{\text{declared}}$ can be used for creation of families in other vehicle classes if the family criteria in accordance with point 5 of this Appendix are met based on the provisions given in Table 16.]

TABLE 16

Provisions for transfer of air drag values to other vehicle classes

| Vehicle group | Transfer formula | Remarks |
|--------------------|--|---|
| 1 | Vehicle group 2 – 0,2 m ² | Only allowed if value for related family in group 2 was measured |
| 2 | Vehicle group 3 – 0,2 m ² | Only allowed if value for related family in group 3 was measured |
| 3 | Vehicle group 4 – 0,2 m ² | |
| 4 | No transfer allowed | |
| 5 | No transfer allowed | |
| 9 | Vehicle group 1,2,3,4 + 0,1 m ² | Applicable group for transfer has to match with gross vehicle weight. Transfer of already transferred values allowed. |
| 10 | Vehicle group 1,2,3,5 + 0,1 m ² | |
| 11 | Vehicle group 9 | Transfer of already transferred values allowed |
| 12 | Vehicle group 10 | Transfer of already transferred values allowed |
| [^{F1} 16 | Vehicle group 9 + 0,3 m ² | Applicable vehicle group for transfer has to match with gross vehicle weight. |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | |
|--|--|
| | Transfer to already transferred values allowed.] |
|--|--|

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 6

Conformity of the certified CO₂ emissions and fuel consumption related properties

1. The conformity of the certified CO₂ emissions and fuel consumption related properties shall be verified by constant speed tests as laid down in section 3 of the main part of this Annex. For conformity of the certified CO₂ emissions and fuel consumption related properties the following additional provisions apply:
 - i. The ambient temperature of the constant speed test shall be within a range of ± 5 °C to the value from the certification measurement. This criterion is verified based on the average temperature from the first low speed tests as calculated by the air drag pre-processing tool.
 - ii. The high speed test shall be performed in a vehicle speed range within ± 2 km/h to the value from the certification measurement.

All conformity of the certified CO₂ emissions and fuel consumption related properties tests shall be supervised by the approval authority.

2. A vehicle fails the conformity of the certified CO₂ emissions and fuel consumption related properties test if the measured $C_d A_{cr}(0)$ value is higher than the $C_d \cdot A_{declared}$ value declared for the parent vehicle plus 7,5 % tolerance margin. If a first test fails, up to two additional tests at different days with the same vehicle may be performed. [F¹Where the measured $C_d A_{cr}(0)$ value of all performed tests is higher than the $C_d \cdot A_{declared}$ value declared for the parent vehicle plus 7,5 % tolerance margin, Article 23 of this Regulation shall apply.]

[F²For calculation of $C_d A_{cr}(0)$ value the air drag pre-processing tool version of the parent air drag in accordance with Attachment 1 of Appendix 2 to this Annex shall be used.]

3. The number of vehicles to be tested for conformity with the certified CO₂ emissions and fuel consumption related properties per year of production shall be determined based on Table 17.

Table 17

Number of vehicles to be tested for conformity with the certified CO₂ emissions and fuel consumption related properties per year of production

| Number of CoP tested vehicles | Number of CoP relevant vehicles produced the year before |
|-------------------------------|--|
| 2 | ≤ 25 000 |
| 3 | ≤ 50 000 |
| 4 | ≤ 75 000 |
| 5 | ≤ 100 000 |
| 6 | 100 001 and more |

For the purpose of establishing the production numbers, only air drag data which fall under the requirements of this Regulation and which did not get standard air drag values according to Appendix 8 of this Annex shall be considered.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

4. For the selection of vehicles for conformity of the certified CO₂ emissions and fuel consumption related properties testing the following provisions apply:
 - 4.1. Only vehicles from the production line shall be tested.
 - 4.2. Only vehicles which fulfil the provisions for constant speed testing as laid down in section 3.3 of the main part of this Annex shall be selected.
 - 4.3. Tires are considered part of the measurement equipment and can be selected by the manufacturer.
 - 4.4. Vehicles in families where the air drag value has been determined via transfer from other vehicles according to Appendix 5 point 5 are not subject to conformity of the certified CO₂ emissions and fuel consumption related properties testing.
 - 4.5. Vehicles which use standard values for air drag according to Appendix 8 are not subject to conformity of the certified CO₂ emissions and fuel consumption related properties testing.
 - 4.6. The first two vehicles per manufacturer to be tested for conformity with the certified CO₂ emissions and fuel consumption related properties tested shall be selected from the two biggest families in terms of vehicle production. Additional vehicles shall be selected by the approval authority.
5. After a vehicle was selected for conformity of the certified CO₂ emissions and fuel consumption related properties the manufacturer has to verify the conformity of the certified CO₂ emissions and fuel consumption related properties within a time period of 12 month. The manufacturer may request the approval authority for an extension of that period for up to 6 months if he can prove that the verification was not possible within the required period due to weather conditions.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 7

Standard values

- Standard values for the declared air drag value $C_d \cdot A_{declared}$ are defined according to Table 18. In case standard values shall be applied, no input data on air drag shall be provided to the simulation tool. In this case the standard values are allocated automatically by the simulation tool.

Table 18

Standard values for $C_d \cdot A_{declared}$

| Vehicle group | Standard value $C_d \cdot A_{declared}$ [m ²] |
|---------------|---|
| 1 | 7,1 |
| 2 | 7,2 |
| 3 | 7,4 |
| 4 | 8,4 |
| 5 | 8,7 |
| 9 | 8,5 |
| 10 | 8,8 |
| 11 | 8,5 |
| 12 | 8,8 |
| 16 | 9,0 |

- [^{F12} For vehicle configurations ‘rigid lorry + trailer’ the overall air drag value is calculated by the simulation tool by adding standard delta values for trailer influence as specified in Table 19 to the $C_d \cdot A_{declared}$ value for the rigid lorry.]

Table 19

Standard delta air drag values for trailer influence

| Trailer | Standard delta air drag values for trailer influence [m ²] |
|---------|--|
| T1 | 1,3 |
| T2 | 1,5 |

- For EMS vehicle configurations the air drag value of the overall vehicle configuration is calculated by the simulation tool by adding the standard delta values for EMS influence as specified in Table 20 to the air drag value for the baseline vehicle configuration.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Table 20

Standard delta $C_d A_{cr}$ (0) values for EMS influence

| EMS configuration | Standard delta air drag values for EMS influence [m²] |
|--|---|
| (Class 5 tractor + ST1) + T2 | 1,5 |
| (Class 9/11 truck) + dolly + ST 1 | 2,1 |
| (Class 10/12 tractor + ST1) + T2 | 1,5 |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 8

Markings

In the case of a vehicle being type approved accordant to this Annex, the cabin shall bear:


- 1.1. [F¹The manufacturer's name or trade mark]
- 1.2 The make and identifying type indication as recorded in the information referred to in paragraph 0.2 and 0.3 of Appendix 2 to this Annex
- 1.3 The certification mark as a rectangle surrounding the lower-case letter 'e' followed by the distinguishing number of the Member State which has granted the certificate:
 - 1 for Germany;
 - 2 for France;
 - 3 for Italy;
 - 4 for the Netherlands;
 - 5 for Sweden;
 - 6 for Belgium;
 - 7 for Hungary;
 - 8 for the Czech Republic;
 - 9 for Spain;
 - 11 for the United Kingdom;
 - 12 for Austria;
 - 13 for Luxembourg;
 - 17 for Finland;
 - 18 for Denmark;
 - 19 for Romania;
 - 20 for Poland;
 - 21 for Portugal;
 - 23 for Greece;
 - 24 for Ireland;
 - 25 for Croatia;
 - 26 for Slovenia;
 - 27 for Slovakia;
 - 29 for Estonia;
 - 32 for Latvia;
 - 34 for Bulgaria;
 - 36 for Lithuania;
 - 49 for Cyprus;
 - 50 for Malta
- 1.4 The certification mark shall also include in the vicinity of the rectangle the 'base certification number' as specified for Section 4 of the type-approval number set out in Annex VII to Directive 2007/46/EC, preceded by the two figures indicating the sequence number assigned to the latest technical amendment to this Regulation and by a character 'P' indicating that the approval has been granted for an air drag.

For this Regulation, the sequence number shall be 00.

- 1.4.1 Example and dimensions of the certification mark

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

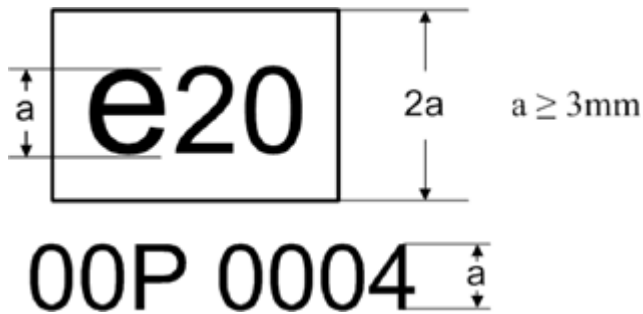

The above certification mark affixed to a cabin shows that the type concerned has been approved in Poland (e20), pursuant to this Regulation. The first two digits (00) are indicating the sequence number assigned to the latest technical amendment to this Regulation. The following letter indicates that the certificate was granted for an air drag (P). The last four digits (0004) are those allocated by the type-approval authority to the engine as the base certification number.

- 1.5 The certification mark shall be affixed to the cabin in such a way as to be indelible and clearly legible. It shall be visible when the cabin is installed on the vehicle and shall be affixed to a part necessary for normal cabin operation and not normally requiring replacement during cabin life. ^[F1]The markings, labels, plates or stickers must be durable for the useful life of the cabin and must be clearly legible and indelible.] The manufacturer shall ensure that the markings, labels, plates or sticker cannot be removed without destroying or defacing them.

2 Numbering

^[F1]2.1. Certification number for air drag shall comprise the following:

eX*YYYY/YYYY*ZZZZ/ZZZZ*P*0000*00

| Section 1 | Section 2 | Section 3 | Additional letter to section 3 | Section 4 | Section 5 |
|---|--|--|--------------------------------|--------------------------------|---------------|
| Indication of country issuing the certificate | HDV CO ₂ certification Regulation (2017/2400) | Latest amending Regulation (ZZZZ/ZZZZ) | P = Air drag | Base certification number 0000 | Extension 00] |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

[^{F1}Appendix 9

Input parameters for the simulation tool

Introduction

This Appendix describes the list of parameters to be provided by the vehicle manufacturer as input to the simulation tool. The applicable XML schema as well as example data are available at the dedicated electronic distribution platform.

The XML is automatically generated by the air drag pre-processing tool.

Definitions

- (1) 'Parameter ID': Unique identifier as used in the simulation tool for a specific input parameter or set of input data
- (2) 'Type': Data type of the parameter
- string ... sequence of characters in ISO8859-1 encoding
 - token ... sequence of characters in ISO8859-1 encoding, no leading/trailing whitespace
 - date ... date and time in UTC time in the format: *YYYY-MM-DDTHH:MM:SSZ* with italic letters denoting fixed characters e.g. '2002-05-30T09:30:10Z'
 - integer ... value with an integral data type, no leading zeros, e.g. '1800'
 - double, X ... fractional number with exactly X digits after the decimal sign ('.') and no leading zeros e.g. for 'double, 2': '2345.67'; for 'double, 4': '45.6780'
- (3) 'Unit' ... physical unit of the parameter

Set of input parameters

TABLE 1

Input parameters 'AirDrag'

| Parameter name | Parameter ID | Type | Unit | Description/ Reference |
|---------------------|--------------|-------|------|--|
| Manufacturer | P240 | token | | |
| Model | P241 | token | | |
| CertificationNumber | P242 | token | | Identifier of the component as used in the certification process |
| Date | P243 | date | | Date and time when the component hash is created |
| AppVersion | P244 | token | | Number identifying the version of the air drag pre-processing tool |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | |
|-----------------|------|-----------|-------------------|--|
| CdxA_0 | P245 | double, 2 | [m ²] | Final result of the air drag pre-processing tool. |
| TransferredCdxA | P246 | double, 2 | [m ²] | CdxA_0 transferred to related families in other vehicle groups in accordance with Table 16 of Appendix 5. In case no transfer rule was applied CdxA_0 shall be provided. |
| DeclaredCdxA | P146 | double, 2 | [m ²] | Declared value for air drag family |

In case standard values in accordance with Appendix 7 shall be used in the simulation tool, no input data for air drag component shall be provided. The standard values are allocated automatically in accordance with the vehicle group scheme.]

ANNEX IX

VERIFYING TRUCK AUXILIARY DATA

1. Introduction

This Annex describes the provisions regarding the power consumption of auxiliaries for heavy duty vehicles for the purpose of the determination of vehicle specific CO₂ emissions.

[^{F1}The power consumption of the following auxiliaries shall be considered within the simulation tool by using technology specific average standard power values:]

- (a) Fan
- (b) Steering system
- (c) Electric system
- (d) Pneumatic system
- (e) Air Conditioning (AC) system
- (f) Transmission Power Take Off (PTO)

[^{F1}The standard values are integrated in the simulation tool and automatically used by choosing the corresponding technology.]

2. Definitions

For the purposes of this Annex the following definitions shall apply:

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- (1) 'Crankshaft mounted fan' means a fan installation where the fan is driven in the prolongation of the crankshaft, often by a flange;
- (2) 'Belt or transmission driven fan' means a fan that is installed in a position where additional belt, tension system or transmission is needed;
- (3) 'Hydraulic driven fan' means a fan propelled by hydraulic oil, often installed away from the engine. A hydraulic system with oil system, pump and valves are influencing losses and efficiencies in the system;
- (4) 'Electrically driven fan' means a fan propelled by an electric motor. The efficiency for complete energy conversion, included in/out from battery, is considered;
- (5) 'Electronically controlled visco clutch' means a clutch in which a number of sensor inputs together with SW logic are used to electronically actuate the fluid flow in the visco clutch;
- (6) 'Bimetallic controlled visco clutch' means a clutch in which a bimetallic connection is used to convert a temperature change into mechanical displacement. The mechanical displacement is then working as an actuator for the visco clutch;
- (7) 'Discrete step clutch' means a mechanical device where the grade of actuation can be made in distinct steps only (not continuous variable).
- (8) 'On/off clutch' means a mechanical clutch which is either fully engaged or fully disengaged;
- (9) 'Variable displacement pump' means a device that converts mechanical energy to hydraulic fluid energy. The amount of fluid pumped per revolution of the pump can be varied while the pump is running;
- (10) 'Constant displacement pump' means a device that converts mechanical energy to hydraulic fluid energy. The amount of fluid pumped per revolution of the pump cannot be varied while the pump is running;
- (11) 'Electric motor control' means the use of an electric motor to propel the fan. The electrical machine converts electrical energy into mechanical energy. Power and speed are controlled by conventional technology for electric motors;
- (12) 'Fixed displacement pump (default technology)' means a pump having an internal limitation of the flow rate;
- (13) 'Fixed displacement pump with electronic control' means a pump using an electronic control of the flow rate;
- (14) 'Dual displacement pump' means a pump with two chambers (with the same or different displacement) which can be combined or only one of these is used. It is characterised by an internal limitation of flow rate;
- (15) 'Variable displacement pump mech. controlled' means a pump where the displacement is mechanically controlled internally (internal pressure scales);
- (16) 'Variable displacement pump elec. controlled' means a pump where the displacement is mechanically controlled internally (internal pressure scales). Additionally, the flow rate is elec. controlled by a valve;
- (17) [^{F1}'Electric steering pump' means a hydraulic pump driven by an electric motor;]

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- (18) ‘Baseline air compressor’ means a conventional air compressor without any fuel saving technology;
- (19) ‘Air compressor with Energy Saving System (ESS)’ means a compressor reducing the power consumption during blow off, e.g. by closing intake side, ESS is controlled by system air pressure;
- (20) ‘Compressor clutch (visco)’ means a disengageable compressor where the clutch is controlled by the system air pressure (no smart strategy), minor losses during disengaged state caused by visco clutch;
- (21) ‘Compressor clutch (mechanically)’ means a disengageable compressor where the clutch is controlled by the system air pressure (no smart strategy);
- (22) ‘Air Management System with optimal regeneration (AMS)’ means an electronic air processing unit that combines an electronically controlled air dryer for optimized air regeneration and an air delivery preferred during overrun conditions (requires a clutch or ESS).
- (23) ‘Light Emitting Diodes (LED)’ mean semiconductor devices that emit visible light when an electrical current passes through them.
- (24) ‘Air conditioning system’ means a system consisting of a refrigerant circuit with compressor and heat exchangers to cool down the interior of a truck cab or bus body.
- (25) ‘Power take-off (PTO)’ means a device on a transmission or an engine to which an auxiliary driven device, e.g., a hydraulic pump, can be connected; a power take-off is usually optional;
- (26) ‘Power take-off drive mechanism’ means a device in a transmission that allows the installation of a power take-off (PTO);
- (27) ‘Tooth clutch’ means a (manoeuvrable) clutch where torque is transferred mainly by normal forces between mating teeth. A tooth clutch can either be engaged or disengaged. It is operated in load-free conditions only (e.g. at gear shifts in a manual transmission);
- (28) ‘Synchroniser’ means a type of tooth clutch where a friction device is used to equalise the speeds of the rotating parts to be engaged;
- (29) ‘Multi-disc clutch’ means a clutch where several friction linings are arranged in parallel whereby all friction pairs get the same pressing force. Multi-disc clutches are compact and can be engaged and disengaged under load. They may be designed as dry or wet clutches;
- (30) ‘Sliding wheel’ means a gearwheel used as shift element where the shifting is realized by moving the gearwheel on its shaft into or out of the gear mesh of the mating gear.

3. Determination of technology specific average standard power values

3.1 Fan

For the fan power the standard values shown in Table 1 shall be used depending on mission profile and technology:

TABLE 1

Mechanical power demand of the fan

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| Fan drive cluster | Fan control | Fan power consumption [W] | | | | |
|--|--|---------------------------|-------------------|----------------|-------------------|--------------|
| | | Long haul | Regional delivery | Urban delivery | Municipal utility | Construction |
| Crankshaft mounted | Electronically controlled visco clutch | 618 | 671 | 516 | 566 | 1 037 |
| | Bimetallic controlled visco clutch | 818 | 871 | 676 | 766 | 1 277 |
| | Discrete step clutch | 668 | 721 | 616 | 616 | 1 157 |
| | On/off clutch | 718 | 771 | 666 | 666 | 1 237 |
| Belt driven or driven via transmission | Electronic controlled visco clutch | 989 | 1 044 | 833 | 933 | 1 478 |
| | Bimetallic controlled visco clutch | 1 189 | 1 244 | 993 | 1 133 | 1 718 |
| | Discrete step clutch | 1 039 | 1 094 | 983 | 983 | 1 598 |
| | On/off clutch | 1 089 | 1 144 | 1 033 | 1 033 | 1 678 |
| Hydraulically driven | Variable displacement pump | 938 | 1 155 | 832 | 917 | 1 872 |
| | Constant displacement pump | 1 200 | 1 400 | 1 000 | 1 100 | 2 300 |
| Electrically driven | Electronically | 700 | 800 | 600 | 600 | 1 400 |

If a new technology within a fan drive cluster (e.g. crankshaft mounted) cannot be found in the list the highest power values within that cluster shall be taken. If a new technology cannot be found in any cluster the values of the worst technology at all shall be taken (hydraulic driven constant displacement pump)

3.2 Steering System

For the steering pump power the standard values [W] shown in Table 2 shall be used depending on the application in combination with correction factors:

f^{F1} TABLE 2

Mechanical power demand of steering pump

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| Identification of vehicle configuration | | Steering power consumption P [W] | | | | | | | | | | | | | | | | | | |
|---|------------------------------|----------------------------------|-----------------------|--------------|---------------------------|-----------|-------|----|-------------------|-------|----|----------------|-------|----|-------------------|-------|----|--------------|--|--|
| | | Number of axles | Chassis configuration | Vehicle type | Maximum laden mass (tons) | Long haul | | | Regional delivery | | | Urban delivery | | | Municipal utility | | | Construction | | |
| U + F | B | | | | | S | U + F | B | S | U + F | B | S | U + F | B | S | U + F | B | S | | |
| 2 | 4 × 2 | Rigid lorry 7,5 + - (Tractor) | 1 | | | | 240 | 20 | 20 | 220 | 20 | 30 | | | | | | | | |
| | | Rigid lorry 10 + - (Tractor) | 2 | 340 | 30 | 0 | 290 | 30 | 20 | 260 | 20 | 30 | | | | | | | | |
| | Rigid lorry 12 + - (Tractor) | 3 | | | | 310 | 30 | 30 | 280 | 30 | 40 | | | | | | | | | |
| | Rigid lorry 16 | 4 | 510 | 100 | 0 | 490 | 40 | 40 | 430 | 40 | 50 | 430 | 30 | 50 | 580 | 30 | 70 | | | |
| | Tractor 16 | 5 | 600 | 120 | 0 | 540 | 90 | 40 | | | | | | | 640 | 50 | 80 | | | |
| | 4 × 4 | Rigid lorry 7,5 - 16 | 6 | — | | | | | | | | | | | | | | | | |
| | | Rigid lorry 16 | 7 | — | | | | | | | | | | | | | | | | |
| | Tractor 16 | 8 | — | | | | | | | | | | | | | | | | | |
| 3 | 6 × 2/2 - 4 | Rigid lorry | 9 | 600 | 120 | 0 | 490 | 60 | 40 | 440 | 50 | 50 | 430 | 30 | 50 | 640 | 50 | 80 | | |
| | | Tractor | 10 | 450 | 120 | 0 | 440 | 90 | 40 | | | | | | 640 | 50 | 80 | | | |
| | 6 × 4 | Rigid lorry | 11 | 600 | 120 | 0 | 490 | 60 | 40 | | | | 430 | 30 | 50 | 640 | 50 | 80 | | |
| | | Tractor | 12 | 450 | 120 | 0 | 440 | 90 | 40 | | | | | | 640 | 50 | 80 | | | |
| | 6 × 6 | Rigid lorry | 13 | — | | | | | | | | | | | | | | | | |
| | | Tractor | 14 | — | | | | | | | | | | | | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | | | | | | | | | | | | | | |
|---|---------|-----------------|----|---|--|--|--|--|--|--|--|--|--|--|--|--|-----|----|----|
| 4 | 8 × 2 | Rigid all lorry | 15 | — | | | | | | | | | | | | | | | |
| | 8 × 4 | Rigid all lorry | 16 | | | | | | | | | | | | | | 640 | 50 | 80 |
| | 8 × 6/8 | Rigid all lorry | 17 | — | | | | | | | | | | | | | | | |

where:

- U = Unloaded – pumping oil without steering pressure demand
- F = Friction – friction in the pump
- B = Banking – steer correction due to banking of the road or side wind
- S = Steering – steer pump power demand due to cornering and manoeuvring.]

To consider the effect of different technologies, technology depending scaling factors as shown in Table 3 and Table 4 shall be applied.

TABLE 3

Scaling factors depending on technology

| Technology | Factor c1 depending on technology | | |
|--|-----------------------------------|----------------------|--------------------|
| | c _{1,U+F} | c _{1,B} | c _{1,S} |
| Fixed displacement | 1 | 1 | 1 |
| Fixed displacement with electrical control | 0,95 | 1 | 1 |
| Dual displacement | 0,85 | 0,85 | 0,85 |
| Variable displacement, mech. controlled | 0,75 | 0,75 | 0,75 |
| Variable displacement, elec. controlled | 0,6 | 0,6 | 0,6 |
| Electric | 0 | 1,5/η _{alt} | 1/η _{alt} |

with η_{alt} = alternator efficiency = const. = 0,7

[^{F1}If a new technology is not listed, the technology ‘fixed displacement’ shall be considered in the simulation tool.]

TABLE 4

Scaling factor depending on number of steered axles

| Number of steered axles | Factor c2 depending on number of steered axles | | | | |
|-------------------------|--|-------------------|----------------|-------------------|--------------|
| | Long haul | Regional delivery | Urban delivery | Municipal utility | Construction |
| | | | | | |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| steered axles | $c_{2,U}$ | $c_{2,B}$ | $c_{2,S}$ | $c_{2,U}$ | $c_{2,B}$ | $c_{2,S}$ | $c_{2,U}$ | $c_{2,B}$ | $c_{2,S}$ | $c_{2,U}$ | $c_{2,B}$ | $c_{2,S}$ | $c_{2,U}$ | $c_{2,B}$ | $c_{2,S}$ |
|------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| | +F | | | +F | | | +F | | | +F | | | +F | | |
| 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 2 | 1 | 0,7 | 0,7 | 1,0 | 0,7 | 0,7 | 1,0 | 0,7 | 0,7 | 1,0 | 0,7 | 0,7 | 1,0 | 0,7 | 0,7 |
| 3 | 1 | 0,5 | 0,5 | 1,0 | 0,5 | 0,5 | 1,0 | 0,5 | 0,5 | 1,0 | 0,5 | 0,5 | 1,0 | 0,5 | 0,5 |
| 4 | 1,0 | 0,5 | 0,5 | 1,0 | 0,5 | 0,5 | 1,0 | 0,5 | 0,5 | 1,0 | 0,5 | 0,5 | 1,0 | 0,5 | 0,5 |

The final power demand is calculated by:

If different technologies are used for multi-steered axles, the mean values of the corresponding factors c_1 shall be used.

The final power demand is calculated by:

$$P_{tot} = \sum_i (P_{U+F} * \text{mean}(c_{1,U+F}) * (c_{2i,U+F})) + \sum_i (P_B * \text{mean}(c_{1,B}) * (c_{2i,B})) + \sum_i (P_S * \text{mean}(c_{1,S}) * (c_{2i,S}))$$

where:

| | |
|-----------|--|
| P_{tot} | = Total power demand [W] |
| P | = Power demand [W] |
| c_1 | = Correction factor depending on technology |
| c_2 | = Correction factor depending on number of steered axles |
| $U+F$ | = Unloaded + friction [-] |
| B | = Banking [-] |
| S | = Steering [-] |
| i | = Number of steered axles [-] |

3.3 Electric system

For the electric system power the standard values [W] as shown in Table 5 shall be used depending on the application and technology in combination with the alternator efficiencies:

TABLE 5

Electrical power demand of electric system

| Technologies influencing electric power consumption | Electric power consumption [W] | | | | |
|---|--------------------------------|-------------------|----------------|-------------------|--------------|
| | Long haul | Regional delivery | Urban delivery | Municipal utility | Construction |
| Standard technology electric power [W] | 1 200 | 1 000 | 1 000 | 1 000 | 1 000 |
| LED main front headlights | - 50 | - 50 | - 50 | - 50 | - 50 |

To derive the mechanical power, an alternator technology dependent efficiency factor as shown in Table 6 shall be applied.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

TABLE 6

Alternator efficiency factor

| Alternator (power conversion) technologies Generic efficiency values for specific technologies | Efficiency η_{alt} | | | | |
|---|-------------------------|-------------------|----------------|-------------------|--------------|
| | Long haul | Regional delivery | Urban delivery | Municipal utility | Construction |
| Standard alternator | 0,7 | 0,7 | 0,7 | 0,7 | 0,7 |

[^{F1}If the technology used in the vehicle is not listed, the technology ‘standard alternator’ shall be considered in the simulation tool.]

The final power demand is calculated by:

$$P_{tot} = \frac{P_{el}}{\eta_{alt}}$$

where:

- P_{tot} = Total power demand [W]
- P_{el} = Electrical power demand [W]
- η_{alt} = Alternator efficiency [-]

3.4 Pneumatic system

For pneumatic systems working with over pressure the standard power values [W] as shown in Table 7 shall be used depending on application and technology.

TABLE 7

Mechanical power demand of pneumatic systems (over pressure)

| Size of air supply | Technology | Long Haul | Regional Delivery | Urban Delivery | Municipal Utility | Construction |
|---|----------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| | | P _{mean} | P _{mean} | P _{mean} | P _{mean} | P _{mean} |
| | | [W] | [W] | [W] | [W] | [W] |
| small displ. ≤ 250 cm ³ 1 cyl./2 cyl. | Baseline | 1 400 | 1 300 | 1 200 | 1 200 | 1 300 |
| | + ESS | - 500 | - 500 | - 400 | - 400 | - 500 |
| | + visco clutch | - 600 | - 600 | - 500 | - 500 | - 600 |
| | + mech. clutch | - 800 | - 700 | - 550 | - 550 | - 700 |
| | + AMS | - 400 | - 400 | - 300 | - 300 | - 400 |
| medium 250 cm ³ < displ. ≤ 500 cm ³ | Baseline | 1 600 | 1 400 | 1 350 | 1 350 | 1 500 |
| | + ESS | - 600 | - 500 | - 450 | - 450 | - 600 |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | |
|--|----------------|---------|---------|---------|---------|---------|
| 1 cyl./2 cyl. 1-stage | + visco clutch | - 750 | - 600 | - 550 | - 550 | - 750 |
| | + mech. clutch | - 1 000 | - 850 | - 800 | - 800 | - 900 |
| | + AMS | - 400 | - 200 | - 200 | - 200 | - 400 |
| medium 250 cm ³ < displ. ≤ 500 cm ³ 1 cyl./2 cyl. 2-stage | Baseline | 2 100 | 1 750 | 1 700 | 1 700 | 2 100 |
| | + ESS | - 1 000 | - 700 | - 700 | - 700 | - 1 100 |
| | + visco clutch | - 1 100 | - 900 | - 900 | - 900 | - 1 200 |
| | + mech. clutch | - 1 400 | - 1 100 | - 1 100 | - 1 100 | - 1 300 |
| | + AMS | - 400 | - 200 | - 200 | - 200 | - 500 |
| large displ. > 500 cm ³ 1 cyl./2 cyl. 1-stage/2- stage | Baseline | 4 300 | 3 600 | 3 500 | 3 500 | 4 100 |
| | + ESS | - 2 700 | - 2 300 | - 2 300 | - 2 300 | - 2 600 |
| | + visco clutch | - 3 000 | - 2 500 | - 2 500 | - 2 500 | - 2 900 |
| | + mech. clutch | - 3 500 | - 2 800 | - 2 800 | - 2 800 | - 3 200 |
| | + AMS | - 500 | - 300 | - 200 | - 200 | - 500 |

For pneumatic systems working with vacuum (negative pressure) the standard power values [W] as shown in Table 8 shall be used.

TABLE 8

Mechanical power demand of pneumatic systems (vacuum pressure)

| | Long Haul | Regional Delivery | Urban Delivery | Municipal Utility | Construction |
|-------------|-------------------------|--------------------------|-------------------------|--------------------------|-------------------------|
| | P_{mean} | P_{mean} | P_{mean} | P_{mean} | P_{mean} |
| | [W] | [W] | [W] | [W] | [W] |
| Vacuum pump | 190 | 160 | 130 | 130 | 130 |

Fuel saving technologies can be considered by subtracting the corresponding power demand from the power demand of the baseline compressor.

The following combinations of technologies are not considered:

- (a) ESS and clutches
- (b) Visco clutch and mechanical clutch

In case of a two-stage compressor, the displacement of the first stage shall be used to describe the size of the air compressor system

3.5 Air Conditioning system

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

For vehicles having an air conditioning system, the standard values [W] as shown in Table 9 shall be used depending on the application.

^{F1}TABLE 9

Mechanical power demand of AC system

| Identification of vehicle configuration | | | | | AC power consumption [W] | | | | |
|---|--------------------|-------------------------|-------------------------------------|---------------|--------------------------|-------------------|----------------|-------------------|--------------|
| Number of axles | Axle configuration | Chassis configuration | Technical maximum laden mass (tons) | Vehicle group | Long haul | Regional delivery | Urban delivery | Municipal utility | Construction |
| 2 | 4 × 2 | Rigid lorry + (Tractor) | > 7,5 - 10 | 1 | | 150 | 150 | | |
| | | Rigid lorry + (Tractor) | > 10 - 12 | 2 | 200 | 200 | 150 | | |
| | | Rigid lorry + (Tractor) | > 12 - 16 | 3 | | 200 | 150 | | |
| | | Rigid lorry | > 16 | 4 | 350 | 200 | 150 | 300 | 200 |
| | | Tractor | > 16 | 5 | 350 | 200 | | | 200 |
| | 4 × 4 | Rigid lorry | > 7,5 - 16 | 6 | — | | | | |
| | | Rigid lorry | > 16 | 7 | — | | | | |
| | | Tractor | > 16 | 8 | — | | | | |
| 3 | 6 × 2/2 - 4 | Rigid lorry | all | 9 | 350 | 200 | 150 | 300 | 200 |
| | | Tractor | all | 10 | 350 | 200 | | | 200 |
| | 6 × 4 | Rigid lorry | all | 11 | 350 | 200 | | 300 | 200 |
| | | Tractor | all | 12 | 350 | 200 | | | 200 |
| | 6 × 6 | Rigid lorry | all | 13 | — | | | | |
| | | Tractor | all | 14 | — | | | | |
| 4 | 8 × 2 | Rigid lorry | all | 15 | — | | | | |
| | 8 × 4 | Rigid lorry | all | 16 | | | | | 200 |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | |
|----------------|----------------|-----|----|----|
| 8 × 6/8 × 8 | Rigid lorry | all | 17 | —] |
|----------------|----------------|-----|----|----|

3.6 Transmission Power Take-Off (PTO)

For vehicles with PTO and/or PTO drive mechanism installed on the transmission, the power consumption shall be considered by determined standard values. The corresponding standard values represent these power losses in usual drive mode when the PTO is switched off/disengaged. [^{F1}Application related power consumptions at engaged PTO are added by the simulation tool and are not described in the following.]

TABLE 10

Mechanical power demand of switched off/disengaged power take-off

| Design variants regarding power losses (in comparison to a transmission without PTO and / or PTO drive mechanism) | | | |
|---|--|------------------------------|-----------------------------|
| Additional drag loss relevant parts | | PTO incl. drive mechanism | only PTO drive mechanism |
| Shafts / gear wheels | Other elements | Power loss [W] | Power loss [W] |
| only one engaged gearwheel positioned above the specified oil level (no additional gearmesh) | — | — | 0 |
| only the drive shaft of the PTO | tooth clutch (incl. synchroniser) or sliding gearwheel | 50 | 50 |
| only the drive shaft of the PTO | multi-disc clutch | 1 000 | 1 000 |
| only the drive shaft of the PTO | multi-disc clutch and oil pump | 2 000 | 2 000 |
| drive shaft and/or up to 2 engaged gearwheels | tooth clutch (incl. synchroniser) or sliding gearwheel | 300 | 300 |
| drive shaft and/or up to 2 engaged gearwheels | multi-disc clutch | 1 500 | 1 500 |
| drive shaft and/or up to 2 engaged gearwheels | multi-disc clutch and oil pump | 3 000 | 3 000 |
| drive shaft and/or more than 2 engaged gearwheels | tooth clutch (incl. synchroniser) or sliding gearwheel | 600 | 600 |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | |
|---|--------------------------------|-------|-------|
| drive shaft and/or more than 2 engaged gearwheels | multi-disc clutch | 2 000 | 2 000 |
| drive shaft and/or more than 2 engaged gearwheels | multi-disc clutch and oil pump | 4 000 | 4 000 |

ANNEX X

CERTIFICATION PROCEDURE FOR PNEUMATIC TYRES

1. Introduction

This Annex describes the certification provisions for tyre with regard to its rolling resistance coefficient. For the calculation of the vehicle rolling resistance to be used as the simulation tool input, the applicable tyre rolling resistance coefficient C_r for each tyre supplied to the original equipment manufacturers and the related tyre test load F_{ZTYRE} shall be declared by the applicant for pneumatic tyre approval.

2. Definitions

For the purposes of this Annex, in addition to the definitions contained in UN/ECE Regulation No. 54 and in UN/ECE Regulation No.117, the following definitions shall apply:

- (1) 'Rolling resistance coefficient C_r ' means a ratio of the rolling resistance to the load on the tyre
- (2) 'The load on the tyre F_{ZTYRE} ' means a load applied to the tyre during the rolling resistance test.
- (3) 'Type of tyre' means a range of tyres which do not differ in such characteristics as:
 - (a) Manufacturer's name;
 - (b) Brand name or trade mark
 - (c) Tyre class (in accordance with Regulation (EC) No 661/2009)
 - (d) Tyre-size designation;
 - (e) Tyre structure (diagonal (bias-ply), radial);
 - (f) Category of use (normal tyre, snow tyre, special use tyre) as defined in UN/ECE Regulation No.117;
 - (g) Speed category (categories);
 - (h) Load-capacity index (indices);
 - (i) Trade description/commercial name;
 - (j) Declared tyre rolling resistance coefficient

3. General requirements

- 3.1. The tyre manufacturer plant shall be certified to ISO/TS 16949.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

3.2. Tyre rolling resistance coefficient

The tyre rolling resistance coefficient shall be the value measured and aligned in accordance with Regulation (EC) No 1222/2009, Annex I part A, expressed in N/kN and rounded to the first decimal place, according to ISO 80000-1 Appendix B, section B.3, rule B (example 1).

3.3. Measurement provisions

The tyre manufacturer shall test either in a laboratory of Technical Services as defined in Article 41 of Directive 2007/46/EC which carry out in its own facility the test referred to in paragraph 3.2, or in its own facilities in the case:

- (i) of the presence and responsibility of a representative of a Technical Service designated by an approval authority, or
- (ii) the tyre manufacturer is designated as a technical service of Category A in accordance with Directive 2007/46/EC Art.41.

3.4. Marking and traceability

[^{F1}3.4.1. The tyre shall be clearly identifiable in respect to the certificate covering it for the corresponding rolling resistance coefficient.]

3.4.2. [^{F1}The tyre manufacturer shall use the markings affixed to the side wall of the tyre or affix an additional identifier to the tyre.] The additional identification shall ensure a unique link of the tyre and its rolling resistance coefficient. It may take a form of:

- quick response (QR) code,
- barcode,
- radio-frequency identification (RFID),
- an additional marking, or
- other tool fulfilling the requirements of 3.4.1.

3.4.3. If an additional identifier is used it shall remain readable until the moment of sales of the vehicle.

3.4.4. In line with Article 19(2) of Directive 2007/46/EC, no type-approval mark is required for tyre certified in accordance with this Regulation.

4. Conformity of the certified CO₂ emissions and fuel consumption related properties

4.1. Any tyre certified under this Regulation shall be in conformity to the declared rolling resistance value as per paragraph 3.2 of this Annex.

4.2. In order to verify conformity of the certified CO₂ emissions and fuel consumption related properties, production samples shall be taken randomly from series production and tested in accordance with the provisions set out in paragraph 3.2.

4.3. Frequency of the tests

4.3.1 The tyre rolling resistance of at least one tyre of a specific type intended for the sales to the original equipment manufacturers shall be tested every 20 000 units of this type per year (e.g. 2 conformity verifications per year of the type whose annual sales volume to the original equipment manufacturers is between 20 001 and 40 000 units).

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 4.3.2 In case the deliveries of a specific tyre type intended for the sales to the original equipment manufacturers is between 500 and 20 000 units per year, at least one conformity verification of the type shall be carried out per year.
- 4.3.3 In case the deliveries of a specific tyre type intended for the sales to the original equipment manufacturers is below 500 units, at least one conformity verification as described in paragraph 4.4 shall be applied every second year.
- 4.3.4 If the volume of tyres delivered to the original equipment manufacturers indicated in 4.3.1 is met within 31 calendar days the maximum number of conformity verifications as described in paragraph 4.3 is limited to one per 31 calendar days.
- 4.3.5 The manufacturer shall justify (ex. by showing sales numbers) to the approval authority the number of tests which has been performed
- 4.4 Verification procedure
- 4.4.1 A single tyre shall be tested in accordance with paragraph 3.2. By default, the machine alignment equation shall be the one valid at the date of verification testing. Tyre manufacturer may request the application of the alignment equation that was used during the certification testing and reported in the information document.
- 4.4.2 In the case the value measured is lower or equal to the declared value plus 0,3 N/kN, the tyre is considered compliant.
- 4.4.3. In the case, the value measured exceeds the declared value by more than 0,3 N/kN, three additional tyres shall be tested. If the value of the rolling resistance of at least one of the three tyres exceeds the declared value by more than 0,4 N/kN, provisions of Article 23 shall apply.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

[^{F1}Appendix 1

MODEL Maximum format: A4 (210 × 297 mm)
OF A
CERTIFICATE
OF A
COMPONENT,
SEPARATE
TECHNICAL
UNIT
OR
SYSTEM
CERTIFICATE ON CO₂ EMISSIONS AND FUEL CONSUMPTION RELATED
PROPERTIES OF A TYRE FAMILY

| | |
|---|----------------------|
| Communication concerning: — granting ^a — extension ^a — refusal ^a — withdrawal ^a | Administration stamp |
| a 'delete as appropriate' | |

of a certificate on CO₂ emission and fuel consumption related properties of a tyre family in accordance with Commission Regulation (EU) 2017/2400, as amended by Commission Regulation (EU) 2019/318

Certification number: ...

Hash: ...

Reason for extension: ...

1. Manufacturer's name and address: ...
2. If applicable, name and address of manufacturer's representative: ...
3. Brand name/trade mark: ...
4. Tyre type description: ...
 - (a) Manufacturer's name ...
 - (b) Brand name or trade mark
 - (c) Tyre class (in accordance with Regulation (EC) No 661/2009) ...
 - (d) Tyre-size designation ...
 - (e) Tyre structure (diagonal (bias-ply); radial) ...
 - (f) Category of use (normal tyre, snow tyre, special use tyre) ...
 - (g) Speed category (categories) ...
 - (h) Load-capacity index (indices) ...
 - (i) Trade description/commercial name ...

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- (j) Declared tyre rolling resistance coefficient ...
5. Tyre identification code(s) and technology(ies) used to provide identification code(s), if applicable:

| Technology: | Code: |
|-------------|-------|
| ... | ... |

6. Technical Service and, where appropriate, test laboratory approved for purposes of approval or of verification of conformity tests: ...
7. Declared values:
- 7.1. declared rolling resistance level of the tyre (in N/kN rounded to the first decimal place, in accordance with ISO 80000-1 Appendix B, section B.3, rule B (*example 1*))
 C_r , ... [N/kN]
- 7.2. tyre test load in accordance with Regulation (EC) No 1222/2009 Annex I part A (85 % of single load, or 85 % of maximum load capacity for single application specified in applicable tyre standards manuals if not marked on tyre.)
 F_{ZTYRE} ... [N]
- 7.3. Alignment equation: ...
8. Any remarks: ...
9. Place: ...
10. Date: ...
11. Signature: ...
12. Annexed to this communication are: ...]

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 2

Tyre rolling resistance coefficient information document

SECTION 1.

I

- 0.1 Name and address of manufacturer
- 0.2 Make (trade name of manufacturer)
- 0.3 Name and address of applicant:
- 0.4 Brand name/ trade description:
- 0.5 Tyre class (in accordance with Regulation (EC) No 661/2009)
- 0.6 Tyre-size designation;
- 0.7 Tyre structure (diagonal (bias-ply); radial);
- 0.8 Category of use (normal tyre, snow tyre, special use tyre);
- 0.9 Speed category (categories);
- 0.10 Load-capacity index (indices);
- 0.11 Trade description/commercial name;
- 0.12 Declared rolling resistance coefficient;
- 0.13 Tool(s) to provide additional rolling resistance coefficient identification code (if any);
- ^{F3}0.14
- 0.15 Load F_{ZTYRE} : ... [N]
- ^{F3}0.16

SECTION 2.

II

- 1. Approval Authority or Technical Service [or Accredited Lab]:
- 2. Test report No.:
- 3. Comments (if any):
- ^{F1}4. Date of test report:[]
- 5. Test machine identification and drum diameter/surface:
- 6. Test tyre details:
 - 6.1. Tyre size designation and service description:
 - 6.2. Tyre brand/ trade description:
 - 6.3. Reference inflation pressure: kPa
- 7. Test data:
 - 7.1. Measurement method:
 - 7.2. Test speed: km/h

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 7.3. Load F_{ZTYRE} : N
- 7.4. Test inflation pressure, initial: kPa
- 7.5. Distance from the tyre axis to the drum outer surface under steady state conditions, r_L : m
- 7.6. Test rim width and material:
- 7.7. Ambient temperature: °C
- 7.8. Skim test load (except deceleration method): N
- 8. Rolling resistance coefficient:
 - 8.1 Initial value (or average in the case of more than 1): N/kN
 - 8.2 Temperature corrected: ... N/kN
 - 8.3 Temperature and drum diameter corrected: N/kN
 - 8.4 [^{F1}Alignment equation:]
 - 8.5 [^{F2}Rolling resistance level of the tyre (in N/kN rounded to the first decimal place, in accordance with ISO80000-1 Appendix B, section B.3, rule B (example 1)) $C_{r,aligned}$: ... [N/kN]]
- 9. Date of test:

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 3

[^{F1}Input parameters for the simulation tool]

Introduction

This Appendix describes the list of parameters to be provided by the component manufacturer as input to the simulation tool. The applicable XML schema as well as example data are available at the dedicated electronic distribution platform.

Definitions

- [^{F1}(1) ‘Parameter ID’:
(2) ‘Type’:
string ... sequence of characters in ISO8859-1 encoding
token ... sequence of characters in ISO8859-1 encoding, no leading/trailing whitespace
date ... date and time in UTC time in the format: YYYY-MM-DD $\mathit{THH:MM:SSZ}$ with italic letters denoting fixed characters e.g. ‘2002-05-30 $\mathit{T09:30:10Z}$ ’
integer ... value with an integral data type, no leading zeros, e.g. ‘1800’
double, X ... fractional number with exactly X digits after the decimal sign (‘.’) and no leading zeros e.g. for ‘double, 2’: ‘2345.67’; for ‘double, 4’: ‘45.6780’
- (3) ‘Unit’ ... physical unit of the parameter
- Set of input parameters

TABLE 1

Input parameters ‘Tyre’

| Parameter name | Param ID | Type | Unit | Description/Reference |
|-------------------------------------|----------|-----------|-------|---|
| Manufacturer | P230 | token | | |
| Model | P231 | token | | Trade name of manufacturer |
| [^{F1} CertificationNumber | P232 | token | |] |
| Date | P233 | date | | Date and time when the component hash is created. |
| AppVersion | P234 | token | | Version number identifying the evaluation tool |
| RRCDeclared | P046 | double, 4 | [N/N] | |
| FzISO | P047 | integer | [N] | |
| [^{F1} Dimension | P108 | string | [-] | Allowed values (non-exhaustive): ‘9.00 R20’, ‘9 R22.5’, |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | |
|--|--|--|---|
| | | | '9.5 R17.5', '10 R17.5', '10 R22.5', '10.00 R20', '11 R22.5', '11.00 R20', '11.00 R22.5', '12 R22.5', '12.00 R20', '12.00 R24', '12.5 R20', '13 R22.5', '14.00 R20', '14.5 R20', '16.00 R20', '205/75 R17.5', '215/75 R17.5', '225/70 R17.5', '225/75 R17.5', '235/75 R17.5', '245/70 R17.5', '245/70 R19.5', '255/70 R22.5', '265/70 R17.5', '265/70 R19.5', '275/70 R22.5', '275/80 R22.5', '285/60 R22.5', '285/70 R19.5', '295/55 R22.5', '295/60 R22.5', '295/80 R22.5', '305/60 R22.5', '305/70 R19.5', '305/70 R22.5', '305/75 R24.5', '315/45 R22.5', '315/60 R22.5', '315/70 R22.5', '315/80 R22.5', '325/95 R24', '335/80 R20', '355/50 R22.5', '365/70 R22.5', '365/80 R20', '365/85 R20', '375/45 R22.5', '375/50 R22.5', '375/90 R22.5', '385/55 R22.5', '385/65 R22.5', '395/85 R20', '425/65 R22.5', '495/45 |
|--|--|--|---|

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | |
|--|--|--|--|----------------------------|
| | | | | R22.5', '525/65 R20.5'] |
|--|--|--|--|----------------------------|

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Appendix 4

Numbering

1. Numbering:

[^{F1}1.1. Certification number for tyres shall comprise the following:

eX*YYYY/YYYY*ZZZZ/ZZZZ*T*0000*00

| Section 1 | Section 2 | Section 3 | Additional letter to section 3 | Section 4 | Section 5 |
|---|--|--|--------------------------------|--------------------------------|---------------|
| Indication of country issuing the certificate | HDV CO ₂ certification Regulation (2017/2400) | Latest amending Regulation (ZZZZ/ZZZZ) | T = Tyre | Base certification number 0000 | Extension 00] |

[^{F2}ANNEX Xa

CONFORMITY OF SIMULATION TOOL OPERATION AND OF CO₂ EMISSIONS AND FUEL CONSUMPTION RELATED PROPERTIES OF COMPONENTS, SEPARATE TECHNICAL UNITS AND SYSTEMS: VERIFICATION TESTING PROCEDURE

1. Introduction

This Annex sets out the requirements for the verification testing procedure which is the test procedure for verifying the CO₂ emissions of new heavy-duty vehicles.

The verification testing procedure consists of an on-road test to verify the CO₂ emissions of new vehicles after production. It shall be carried out by the vehicle manufacturer and verified by the approval authority that granted the licence to operate the simulation tool.


During the verification testing procedure the torque and speed at the driven wheels, the engine speed, the fuel consumption, the engaged gear of the vehicle and the other relevant parameters listed in point 6.1.6 shall be measured. The measured data shall be used as input to the simulation tool, which uses the vehicle-related input data and the input information from the determination of the CO₂ emissions and fuel consumption of the vehicle. For the verification testing procedure simulation, the instantaneously measured wheel torque and the rotational speed of the wheels as well as the engine speed shall be used as input, as described in Figure 1 instead of the vehicle speed, in accordance with point 6.1.6. The fan power during the verification testing procedure shall be calculated in accordance with the measured fan speed. The measured fuel consumption shall be within the tolerances set out in point 7 and compared to the fuel consumption simulated with the verification data set to pass the verification testing procedure.

As part of the verification testing procedure, the correctness of the vehicle input data set from the certification of CO₂ emissions and fuel consumption related properties of the components, separate technical units and systems shall also be reviewed to check the data and the data handling process. The correctness of the input data relating to components, separate technical units and systems relevant for air drag and for rolling resistance of the vehicle shall be verified in accordance with point 6.1.1.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

Figure 1 Schematic picture of the verification testing procedure method

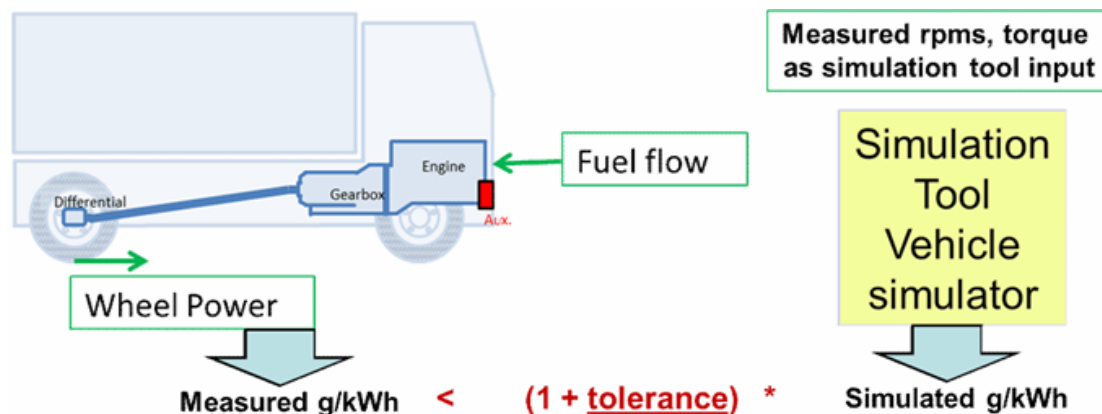

2. Definitions

For the purposes of this Annex the following definitions shall apply:

- (1) 'verification test relevant data set' means a set of input data for components, separate technical units and systems and input information used for CO₂ determination of a verification testing procedure relevant vehicle;
- (2) 'verification testing procedure relevant vehicle' means a new vehicle for which a value of CO₂ emissions and fuel consumption was determined and declared in accordance with Article 9;
- (3) 'corrected actual mass of the vehicle' means the corrected actual mass of the vehicle in accordance with point 2(4) of Annex III;
- (4) 'actual mass of the vehicle' is as defined in Article 2(6) of Regulation (EU) No 1230/2012;
- (5) 'actual mass of the vehicle with payload' means the actual mass of the vehicle with the superstructure and with the payload applied in the verification testing procedure;
- (6) 'wheel power' means the total power at the driven wheels of a vehicle to overcome all driving resistances at the wheel, computed in the simulation tool from the measured torque and rotational speed of the driven wheels;
- (7) 'control area network signal' or 'CAN signal' means a signal from the connection with the vehicle electronic control unit as referred to in paragraph 2.1.5 of Appendix 1 to Annex II to Regulation (EU) No 582/2011;
- (8) 'urban driving' means the total distance driven during the fuel consumption measurement at speeds below 50 km/h;
- (9) 'rural driving' means the total distance driven during the fuel consumption measurement at speeds from 50 km/h to 70 km/h;
- (10) 'motorway driving' means the total distance driven in the fuel consumption measurement at speeds above 70 km/h;

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- (11) ‘crosstalk’ means the signal at the main output of a sensor (M_y), produced by a measurand (F_z) acting on the sensor, which is different from the measurand assigned to this output; the coordinate system assignment is defined in accordance with ISO 4130.

3. Vehicle selection

The number of new vehicles to be tested per year of production ensures that the relevant variations of components, separate technical units or systems used are covered by the verification testing procedure. The vehicle selection for the verification test shall be based on following requirements:

- (a) The vehicles for verification test shall be selected out of the vehicles from the production line for which a value of CO₂ emissions and fuel consumption has been determined and declared in accordance with Article 9. The components, separate technical units or systems mounted in or on the vehicle shall be out of series production and shall correspond to those mounted at production date of the vehicle.
- (b) The vehicle selection shall be made by the approval authority that granted the licence to operate the simulation tool based on proposals from the vehicle manufacturer.
- (c) Only vehicles with one driven axle shall be selected for verification test.
- (d) It is recommended to include in each verification test relevant data set engine, axle and transmission with highest sales numbers per manufacturer. The components, separate technical units or systems may be tested all in one vehicle or in different vehicles, under the condition that each component is covered by minimum one verification test on one vehicle.
- (e) Vehicles which use standard values for CO₂ certification of their components, separate technical units or systems instead of measured values for the transmission and for the axle losses shall not be selected for the verification test as long as vehicles complying with the requirements in points a) to c) and using measured loss maps for these components, separate technical units or systems in the CO₂ certification, are produced.
- (f) The minimum number of different vehicles with different combinations of verification test relevant data sets to be tested by verification test per year shall be based on the sales numbers of the vehicle manufacturer as set out in Table 1:

Table 1

Determination of the minimum number of vehicles to be tested by the vehicle manufacturer

| Number of vehicles to be tested | Verification testing procedure relevant vehicles produced/year |
|--|---|
| 1 | 1-25 000 |
| 2 | 25 001-50 000 |
| 3 | 50 001-75 000 |
| 4 | 75 001-100 000 |
| 5 | more than 100 000 |

- (g) The vehicle manufacturer shall finalize the verification test within a period of 10 months after the date of selection of the vehicle for the verification test.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

4. Vehicle conditions

Each vehicle for the verification test shall be in series conditions as typically delivered to the customer. No changes in hardware such as lubricants or in the software such as auxiliary controllers are allowed.

4.1. Vehicle run in

Run in of the vehicle is not mandatory. If the total mileage of the test vehicle is less than 15 000 km, an evolution coefficient for the test result shall be applied as defined in point 7. The total mileage of the test vehicle shall be the odometer reading at start of the fuel consumption measurement. The maximum mileage for the verification testing procedure shall be 20 000 km.

4.2. Fuel and lubricants

All lubricants shall be in line with the series configuration of the vehicle.

For the fuel consumption measurement as described in point 6.1.5, reference fuel as set out in point 3.2 of Annex V shall be used.

The fuel tank shall be full at start of the fuel consumption measurement run.

5. Measurement equipment

All laboratory reference measurement equipment, used for calibration and verification, shall be traceable to national (international) standards. The calibration laboratory shall comply with the requirements of ISO 9000 series and either ISO/TS 16949 or ISO/IEC 17025.

5.1. Torque

The direct torque at all driven axles shall be measured with one of the following measurement systems fulfilling the requirements listed in Table 2:

- (a) hub torque meter;
- (b) rim torque meter;
- (c) half-shaft torque meter.

The calibrated range shall be at least 10 000 Nm; the measurement range shall cover the entire range of torque occurring during the verification testing procedure of the tested vehicle.

The drift shall be measured during the verification test described in point 6 by zeroing the torque measurement system in accordance with point 6.1.5 after the pre-conditioning phase by lifting the axle and measuring the torque at lifted axle directly after the verification test again.

For a valid test result a maximum drift of the torque measurement system over the verification testing procedure of 150 Nm (sum of both wheels) shall be proven.

5.2. Vehicle speed

The vehicle speed shall be used for possible plausibility checks of the gear signal later on and shall be based on the CAN signal.

5.3. Gear engaged

The engaged gear does not need to be measured but shall be calculated by the simulation tool based on measured engine speed, the vehicle speed and the tyre dimensions and transmission ratios of the vehicle in accordance with point 7. The gear position may be provided also from

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

the CAN signal to check possible deviations from the gear position calculated by the simulation tool. In case of deviations of the gear position in more than 5 % of the test duration, the reasons for the deviation shall be investigated and reported by the vehicle manufacturer. The input data on gear position shall be used in the simulation tool to compute the gear dependent losses in the gear box. The engine speed shall be taken by the simulation tool from the input data as defined in point 5.4.

5.4. Rotational speed of the engine

The signal from the connection with the vehicle electronic control unit via the open on-board diagnostic interface shall be used to measure the engine speed. Alternative measurement systems are allowed if they fulfil the requirements set out in Table 2.

5.5. Rotational speed of the wheels at the driven axle

The measurement system for the rotational speed of left and right wheel at the driven axle for the assessment of the power demand at the wheels as input to the simulation tool for the verification test simulation shall fulfil the requirements set out in Table 2.

5.6. Rotational speed of fan

The CAN signal for the fan speed may be used, if available. Alternatively an external sensor fulfilling the requirements set out in Table 2 may be used.

5.7. Fuel measurement system

The fuel consumed shall be measured on-board with a measurement device reporting the total amount of fuel consumed in kilograms. The fuel measurement system shall be based on one of the following measurement methods:

- (a) Measurement of fuel mass. The fuel measuring device shall fulfil the accuracy requirements set out in Table 2 for the fuel mass measurement system.
- (b) Measurement of fuel volume together with correction for the thermal expansion of the fuel. The fuel volume measurement device and fuel temperature measurement device shall fulfil the accuracy requirements set out in Table 2 for the fuel volume measurement system. The fuel mass consumed shall be calculated in accordance with the following equations:

$$m_{fuel} = \sum_{i=1}^{n-1} \Delta V_{fuel,i} \times \rho_i$$

$$\Delta V_{fuel,i} = V_{fuel,i+1} - V_{fuel,i}$$

$$\rho_i = \frac{\rho_0}{1 + \beta(t_{i+1} - t_0)}$$

where:

- | | | |
|------------|---|---|
| m_{fuel} | = | Calculated fuel mass [kg] |
| n | = | Total number of samples in measurement. |
| ρ_0 | = | Density of the fuel used for the verification test in (kg/m ³). The density shall be determined in accordance with Annex IX of the Regulation (EU) No 582/2011. If diesel fuel is used in the verification test, also the average value of the density interval for the |

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | |
|----------------------|--|
| | reference fuels B7 in accordance with Annex IX of the Regulation (EU) No 582/2011 may be used. |
| t_0 | = Fuel temperature that corresponds to density ρ_0 for the reference fuel, as defined in Annex V [$^{\circ}\text{C}$] |
| ρ_i | = Density of the test fuel at sample i [kg/m^3] |
| $V_{\text{fuel}, i}$ | = Total fuel volume consumed at sample i [m^3] |
| t_{i+1} | = Measured fuel temperature at sample $i + 1$ [$^{\circ}\text{C}$] |
| β | = Temperature correction factor ($0,001 \text{ K}^{-1}$). |

5.8. Vehicle weight

The following masses of the vehicle shall be measured with equipment fulfilling the requirements set out in Table 2:

- (a) actual mass of the vehicle;
- (b) actual mass of the vehicle with payload.

5.9. General requirements for the on-board measurements

All data shall be recorded at least in 2 Hz frequency or at recommended frequency from the equipment maker, whichever is the higher value.

The input data for the simulation tool may be composed from different recorders. The following input data shall be provided from measurements:

- (a) torque at the driven wheels per wheel;
- (b) rotational speed at the driven wheels per wheel;
- (c) gear (optional);
- (d) engine speed;
- (e) fan speed;
- (f) vehicle speed;
- (g) fuel flow.

The torque and rotational speed at the wheels shall be recorded in one data-logging system. If different data-logging systems are used for the other signals, one common signal, such as vehicle speed, shall be recorded to ensure correct time alignment of the signals.

The accuracy requirements set out in Table 2 shall be met by all measurement equipment used. Any equipment not listed in Table 2 shall fulfil the accuracy requirements set out in Table 2 of Annex V.

TABLE 2

Requirements of measurement systems

| Measurement system | Accuracy | Rise time ^a |
|----------------------------|----------|------------------------|
| Balance for vehicle weight | 50 kg or | — |

a Rise time means the difference in time between the 10 percent and 90 percent response of the final analyser reading ($t_{90} - t_{10}$).

b The accuracy shall be met for the integral fuel flow over 100 minutes.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | |
|---|--|---------|
| | < 0,5 % of max. calibration whichever is smaller | |
| Rotational speed wheels | < 0,5 % of max. calibration | ≤ 1 s |
| Fuel mass flow for liquid fuels | < 1,0 % of reading or < 0,5 % of max. calibration whichever is larger | ≤ 2 s |
| Fuel volume measurement system ^b | < 1,0 % of reading or < 0,5 % of max. calibration whichever is larger | ≤ 2 s |
| Temperature of the fuel | ± 1 °C | ≤ 2 s |
| Sensor for measuring the rotational speed cooling fan | 0,4 % of reading or 0,2 % of max. calibration of speed whichever is larger | ≤ 1 s |
| Engine speed | As set out in Annex V | |
| Wheel torque | For 10 kNm calibration: < 40 Nm accuracy < 20 Nm crosstalk | < 0,1 s |

a Rise time means the difference in time between the 10 percent and 90 percent response of the final analyser reading ($t_{90} - t_{10}$).

b The accuracy shall be met for the integral fuel flow over 100 minutes.

The maximum calibration values shall be at least 1,1 times the maximum predicted value expected during all test runs for the respective measurement system. For the torque measurement system the maximum calibration may be limited to 10 kNm.

Accuracy given shall be met by the sum of all single accuracies in the case more than one scale is used.

6. Test procedure

6.1. Vehicle preparation

The vehicle shall be taken from the series production and selected as set out in point 3.

6.1.1. Validation of input data

The manufacturer's records file for the vehicle selected shall be used as basis for validating the input data. The vehicle identification number of the vehicle selected shall be the same as the vehicle identification number in the customer information file.

Upon request by the approval authority that granted the licence to operate the simulation tool, the vehicle manufacturer shall provide, within 15 working days, the manufacturer's records file, the input information and input data necessary to run the simulation tool as well as the certificate of CO₂ emissions and fuel consumption related properties for all relevant components, separate technical units or systems.

6.1.1.1. Verification of components, separate technical units or systems and input data and information

The following checks shall be performed for the components, separate technical units and systems mounted on the vehicle:

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- (a) Simulation tool data integrity: the integrity of the cryptographic hash of the manufacturer's records file in accordance with Article 9(3) re-calculated during the verification testing procedure with the hashing tool shall be verified by comparison with the cryptographic hash in the certificate of conformity;
- (b) Vehicle data: the vehicle identification number, axle configuration, selected auxiliaries and power take off technology shall match the selected vehicle;
- (c) Component, separate technical unit or system data: the certification number and the model type imprinted on the certificate of CO₂ emissions and fuel consumption related properties shall match the component, separate technical unit or system installed in the selected vehicle;
- (d) The hash of the simulation tool input data and the input information shall match the hash imprinted on the certificate of CO₂ emissions and fuel consumption related properties for the following components, separate technical units or systems:
 - (i) engines;
 - (ii) transmissions;
 - (iii) torque converters;
 - (iv) other torque transferring components;
 - (v) additional driveline components;
 - (vi) axles;
 - (vii) body or trailer air drag;
 - (viii) tyres.

6.1.1.2. Verification of the vehicle mass

If requested by the approval authority that granted the licence to operate the simulation tool, a verification of the corrected actual mass of the vehicle shall be included into the verification of input data.

For the verification of the mass, the mass in running order of the vehicle shall be verified in accordance with point 2 of Appendix 2 to Annex I to Regulation (EC) No 1230/2012.

6.1.1.3. Actions to be taken

In case of discrepancies in the certification number or the cryptographic hash of one or more files regarding the components, separate technical units or systems listed in subpoints (d)(i) to (vii) of point 6.1.1.1 the correct input data file fulfilling the checks in accordance with points 6.1.1.1 and 6.1.1.2 shall replace the incorrect data for all further actions. If no complete input data set with correct certificates of CO₂ emissions and fuel consumption related properties is available for the components, separate technical units or systems listed in subpoints (d)(i) to (vii) of point 6.1.1.1 the verification test shall end and the vehicle fails the verification testing procedure.

6.1.2. Run in phase

After the validation of input data in accordance with point 6.1.1, a run in phase up to maximum 15 000 km odometer reading may take place, with no need to use the reference fuel, if the odometer reading of the vehicle selected is below 15 000 km. In case of damage of any of the components, separate technical units or systems listed in point 6.1.1.1, the component, separate technical units or systems may be replaced by an equivalent component, separate technical units

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

or systems with the same certification number. The replacement shall be documented in the test report.

All relevant components, separate technical units or systems shall be checked before the measurements to exclude unusual conditions, such as incorrect oil fill levels, plugged air filters or on-board diagnostic warnings.

6.1.3. Set up of measurement equipment

All measurement systems shall be calibrated in accordance with the provisions of the equipment maker. If no provisions exist, the recommendations from the equipment maker shall be followed for calibration.

After the run in phase, the vehicle shall be equipped with the measurement systems set out in point 5.

6.1.4. Set up of the test vehicle for the fuel consumption measurement

Tractors of the vehicle groups defined in Table 1 of Annex I shall be tested with any type of semitrailer, providing the loading defined below can be applied.

Rigid lorries of the vehicle groups defined in Table 1 of Annex I shall be tested with trailer, if a trailer connection is mounted. Any body type or other device to carry the loading set out below can be applied.

The bodies of the vehicles may differ from the standard bodies set out in Table 1 of Annex I for the certification of CO₂ emissions and fuel consumption related properties of component, separate technical units or systems.

The vehicle payload shall be at minimum to a mass leading to a total test weight of 90 % of the maximum gross combined weight or gross vehicle weight for rigid lorries without trailer.

The tyre inflation pressure shall be in line with the recommendation of the manufacturer. The tyres of the semitrailer may differ from the standard tyres set out in Table 2 of Part B of Annex II to Regulation (EC) No 661/2009 for the CO₂ certification of tyres.

All settings influencing the auxiliary energy demand shall be set to minimum reasonable energy consumption where applicable. The air conditioning shall be switched off and venting of the cabin shall be set lower than medium mass flow. Additional energy consumers not necessary to run the vehicle shall be switched off. External devices to provide energy on board, such as external batteries, are allowed only for running the extra measurement equipment for the verification testing procedure listed in Table 2 but shall not provide energy to serial vehicle equipment.

A particle filter regeneration may be initiated and shall be achieved before the verification test. If an initiated particle filter regeneration cannot be achieved before the verification test, the test is invalid and shall be repeated.

6.1.5. Verification test

6.1.5.1. Route selection

The route selected for the verification test shall fulfil the requirements set out in Table 3. The routes may include both public and private tracks.

6.1.5.2. Vehicle pre conditioning

No specific pre-conditioning of the vehicle is required.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

6.1.5.3. Vehicle warm up

Before the fuel consumption measurement starts, the vehicle shall be driven for warm up as set out in Table 3. The warm up phase shall not be considered in the evaluation of the verification test.

6.1.5.4. Zeroing of the torque measurement equipment

Zeroing of the torque measurement equipment shall follow the instruction of the equipment maker. It shall be ensured for zeroing, that the torque on the driven axle is zero. For zeroing, the vehicle shall be stopped directly after the warm up phase and zeroing shall be performed directly after the vehicle stop to minimise cool down effects. Zeroing shall be finished within less than 20 minutes.

6.1.5.5. Fuel consumption measurement

The fuel consumption measurement shall start directly after the zeroing of the wheel-torque measurement equipment at vehicle stand still and engine idling. The vehicle shall be driven during the measurement in a driving style avoiding unnecessary braking of the vehicle, gas pedal pumping and aggressive cornering. The setting for the electronic control systems which is activated automatically at vehicle start shall be used, and gear shifts shall be performed by the automated system if applicable. If only manual settings for the electronic control systems are available, the settings leading to higher fuel consumption per kilometre shall be selected. The duration of the fuel consumption measurement shall be within the tolerances set out in Table 3. The fuel consumption measurement shall end also at vehicle stand still in idling condition directly before the measurement of the drift of the torque measurement equipment.

6.1.5.6. Measurement of the drift of the torque measurement equipment

Directly after the fuel consumption measurement, the drift of the torque measurement equipment shall be recorded by measuring the torque at the same vehicle conditions as during the zeroing process. If the fuel consumption measurement does not end at zero vehicle speed, the vehicle shall be stopped for the drift measurement in moderate deceleration.

6.1.5.7. Boundary conditions for the verification test

The boundary conditions to be met for a valid verification test are set in Table 3.

If the vehicle passes the verification test in accordance with point 7, the test shall be set valid even if the following conditions are not met:

- undercut of minimum values for parameter No 1, 2, 6, 9 in Table 3,
- exceedance of maximum values for parameter No 3, 4, 5, 7, 8, 10, 12 in Table 3.

TABLE 3

Parameters for a valid verification test

| No | Parameter | Min. | Max. | Applicable for |
|----|------------------------------------|-----------------|------|----------------|
| 1 | Warm up [minutes] | 60 | | |
| 2 | Average velocity at warm up [km/h] | 70 ^a | 100 | |

^a Or maximum vehicle speed if lower than 70 km/h

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | |
|----|--|-------|-------|----------------------------|
| 3 | Fuel consumption measurement duration [minutes] | 80 | 120 | |
| 4 | Distance based share urban driving | 2 % | 8 % | vehicle groups 4, 5, 9, 10 |
| 5 | Distance based share rural driving | 7 % | 13 % | |
| 6 | Distance based share motorway driving | 74 % | — | vehicle groups 4, 5, 9, 10 |
| 7 | Time share of idling at stand still | | 5 % | |
| 8 | Average ambient temperature | 5 °C | 30 °C | |
| 9 | Road condition dry | 100 % | | |
| 10 | Road condition snow or ice | | 0 % | |
| 11 | Seal level of the route [m] | 0 | 800 | |
| 12 | Duration of continuous idling at stand still [minutes] | | 3 | |

a Or maximum vehicle speed if lower than 70 km/h

In case of extraordinary traffic conditions, the verification test shall be repeated.

6.1.6. Data reporting

The data recorded during the verification testing procedure shall be reported to the approval authority that granted the licence to operate the simulation tool as follows:

- (a) The data recorded shall be reported in a constant 2 Hz signals as set out in Table 1. The data recorded at higher frequencies than 2 Hz shall be converted into 2 Hz by averaging the time intervals around the 2 Hz nodes. In case of e.g. 10 Hz sampling, the first 2 Hz node is defined by the average from second 0,1 to 0,5, the second node is defined by the average from second 0,6 to 1,0. The time stamp for each node shall be the last time stamp per node, i.e. 0,5, 1,0, 1,5 etc.
- (b) The wheel power shall be calculated from the measured wheel torque and rotational wheel speed. All values shall first be converted into 2 Hz signals in accordance with

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

point (a). Then the wheel power for each driven wheel shall be calculated from the 2 Hz torque and speed signals as set out in the following equation:

$$P_{\text{wheel-}i(t)} = \frac{2 \times \pi \times n_{\text{wheel-}i(t)} \times M_{\text{dwheel-}i(t)}}{60000}$$

where:

| | | |
|--------------------------|---|---|
| i | = | Index standing for left and right wheel of the driven axle |
| $P_{\text{wheel-}i(t)}$ | = | power at the left and right driven wheel time node (t) [kW] |
| $n_{\text{wheel-}i(t)}$ | = | rotational speed of driven the left and right driven wheel at time node (t) [rpm] |
| $M_{\text{dwheel-}i(t)}$ | = | measured torque at the left and right driven wheel at time node (t) [Nm] |

The wheel power input data for the verification test simulation with the simulation tool shall be the sum of the power of all driven wheels of the vehicle as set out in the following equation:

$$P_{\text{wheel}(t)} = \sum_{i=1}^{\text{wd}} P_{\text{wheel-}i(t)}$$

where:

| | | |
|-----------------------|---|---|
| $P_{\text{wheel}(t)}$ | = | total power at a driven wheel at time node (t) [kW] |
| wd | = | number of driven wheels |

TABLE 4

Data reporting format for measured data for the simulation tool in the verification test

| Quantity | Unit | Header input data | Comment |
|--------------------------|--------|-------------------|--------------------------------|
| time node | [s] | <t> | |
| vehicle speed | [km/h] | <v> | |
| engine speed | [rpm] | <n_eng> | |
| engine cooling fan speed | [rpm] | <n_fan> | |
| torque left wheel | [Nm] | <tq_left> | |
| torque right wheel | [Nm] | <tq_right> | |
| wheel speed left | [rpm] | <n_wh_left> | |
| wheel speed right | [rpm] | <n_wh_right> | |
| gear | [-] | <gear> | optional signal for MT and AMT |
| fuel flow | [g/h] | <fc> | for standard NCV (point 7.2) |

7. Test evaluation

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

The simulated fuel consumption shall be compared to the measured fuel consumption using the simulation tool.

7.1. Simulation of the fuel consumption

The input data and input information for the simulation tool for the verification test shall be the following:

- (a) The certified CO₂ emissions and fuel consumption related properties of the following components, separate technical units or systems:
 - (i) engines;
 - (ii) transmissions;
 - (iii) torque converters;
 - (iv) other torque transferring components;
 - (v) additional driveline components;
 - (vi) axles.
- (b) The input data set out in Table 4.

The power calculated by the simulation tool by the equations of longitudinal dynamics from the measured vehicle speed and road gradient course may be used for plausibility checks to test if the total simulated cycle work is similar to the measured value.

The simulation tool shall calculate the gears engaged during the verification test by calculating the engine speeds per gear at the actual vehicle speed and selecting the gear that provides the engine speed closest to the measured engine speed.

The measured wheel power shall replace in the verification test mode of the simulation tool the simulated power demand at the wheels. The measured engine speed and the gear defined in the verification test input data shall replace the corresponding simulation part. The standard fan power in the simulation tool shall be replaced by the fan power calculated from the measured fan speed in the simulation tool as follows:

$$P_{\text{fan}} = C1 \times \left(\left(\frac{\text{RPM}_{\text{fan}}}{C2} \right)^3 \times \left(\frac{D_{\text{fan}}}{C3} \right)^5 \right)$$

where:

| | |
|---------------------------|---|
| P_{fan} | = fan power to be used in the simulation for the verification test [kW] |
| RPM_{fan} | = measured rotational speed of the fan [1/s] |
| D_{fan} | = diameter of the fan [m] |
| $C1, C2, C3$ | = generic parameters in the simulation tool: |
| $C1$ | = 7 320 W |
| $C2$ | = 1 200 rpm |
| $C3$ | = 810 mm |

The steering pump, compressor and generator shall be attributed standard values in accordance with Annex IX.

All other simulation steps and data handling concerning axle, transmission and engine efficiency shall be identical to the application of the simulation tool to determine and declare the CO₂ emissions and fuel consumption of new vehicles.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

The simulated fuel consumption value shall be the total fuel flow over the verification test relevant test distance, from the end of the zeroing after the warm up phase to the end of the test. The total verification test relevant test distance shall be calculated from the vehicle speed signal.

The results from the simulation tool for the verification test shall be calculated as follows:

$$FC_{sim} = \frac{\sum_{end}^{t=0} (FC_{sim(t)} \cdot fs)}{VT \text{ work}}$$

where:

VT work = Verification test work calculated by the simulation tool for the complete fuel consumption measurement phase [kWh]

$$VT \text{ work} = \sum_{end}^{t=0} \frac{P_{wheel-i}}{3600 \times fs}$$

FC_{sim} = Fuel consumption simulated by the simulation tool over the complete fuel consumption measurement phase [g/kWh]

fs = Simulation rate [Hz]

FC_{sim(t)} = Instantaneous fuel consumption simulated by the simulation tool over the test [g/s]

7.2. Calculation of the measured fuel consumption

The measured fuel flow shall be integrated for the same time span as the simulated fuel consumption. The measured fuel consumption for the total test shall be calculated as follows:

$$FC_m = \frac{\sum_{end}^{t=0} FC_{m(t)} \cdot fs}{VT \text{ work}_m}$$

where:

FC_m = Fuel consumption measured by integrating fuel mass flow over the complete fuel consumption measurement phase [g/kWh]

FC_{m(t)} = Instantaneous fuel mass flow measured during the fuel consumption measurement phase [g/s]

fs = Sampling rate [Hz]

VT work_m = Verification test work at the wheel calculated from the measured wheel torque and wheel rotational speeds over the complete fuel consumption measurement phase [kWh]

$$VT \text{ work}_m = \sum_{t=0}^{end} \frac{\sum_{i=1}^{i=2} P_{wheel-i-measured,t}}{3600 \times fs}$$

P_{wheel-i-measured,t} = Positive power at the left (i = 1) and right (i = 2) wheel calculated from the measured wheel torque and wheel rotational speeds at time step t where only power values greater zero are considered

$$P_{wheel-i-measured,t} = 0,001 \times \text{torque}_i \times \text{rpm}_i \times \frac{2\pi}{60}$$

Torque_i = instantaneously measured torque at the wheel 'i' in time step 't' [Nm]

rpm_i = instantaneously measured rotational speed at the wheel 'i' in time step 't' [min⁻¹]

The measured fuel consumption values shall be corrected for the net calorific value (NCV) as set out in point 3 of Annex V to calculate the verification test results.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

$$FC_{m,corr} = FC_m \times \frac{NCV_{meas}}{NCV_{std}}$$

where:

- NCV_{meas} = NCV of the fuel used in the verification test determined in accordance with point 3.2 of Annex V [MJ/kg]
 NCV_{std} = Standard NCV in accordance with Table 4 of Annex V [MJ/kg]
 $FC_{m,corr}$ = Fuel consumption measured by integrating fuel mass over the complete fuel consumption measurement phase corrected for the test fuel NCV [g/kWh]

7.3. Pass/Fail check

The vehicle shall pass the verification test if the ratio of corrected measured fuel consumption to simulated fuel consumption is below the tolerances set out in Table 5.

In the case of a shorter run-in phase than 15 000 km the influence on the fuel efficiency of the vehicle may be corrected with the following evolution coefficient:

$$FC_{m-c} = FC_{m,corr} \times \left(ef + \text{mileage} \times \frac{1-ef}{15000 \text{ km}} \right) [\text{g/kWh}]$$

where:

- FC_{m-c} = Fuel consumption measured and corrected of a shorter run-in phase
mileage = run-in distance [km]
ef = Evolution coefficient of 0,98

For vehicle odometer reading above 15 000 km, no correction shall be applied.

The ratio of measured and simulated fuel consumption for the total verification test relevant trip shall be calculated as verification test ratio in accordance with the following equation:

$$C_{VTP} = \frac{FC_{m-c}}{FC_{sim}}$$

Where:

- C_{VTP} = Ratio of fuel consumption measured and simulated in the verification testing procedure

For a comparison with the declared CO₂ emissions of the vehicle in accordance with Article 9, the verified CO₂ emissions of the vehicle are determined as follows:

$$CO_{2verified} = C_{VTP} \times CO_{2declared}$$

where:

- $CO_{2verified}$ = verified CO₂ emissions of the vehicle in [g/t-km]
 $CO_{2declared}$ = declared CO₂ emissions of the vehicle in [g/t-km]

If a first vehicle fails the tolerances for C_{VTP} , two more tests may be performed on the same vehicle or two more similar vehicles may be tested on request of the vehicle manufacturer. For the evaluation of the pass criterion set out in Table 5, the averages of the verification testing procedure ratio from the up to three tests shall be used. If the pass criterion is not reached, the vehicle fails the verification testing procedure.

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

TABLE 5

Pass fail criterion for the verification test

| | C_{VPT} |
|--|-----------|
| Pass criterion for the verification testing procedure | < 1,075 |

8. Reporting procedures

The test report shall be established by the vehicle manufacturer for each vehicle tested and shall include at least the following results of the verification test:

8.1. General

8.1.1. Name and address of the vehicle manufacturer

8.1.2. Address(es) of assembly plant(s)

8.1.3. The name, address, telephone and fax numbers and email address of the vehicle manufacturer's representative

8.1.4. Type and commercial description

8.1.5. Selection criteria for vehicle and CO₂ relevant components (text)

8.1.6. Vehicle owner

8.1.7. Odometer reading at test start of the fuel consumption measurement (km)

8.2. Vehicle information

8.2.1. Vehicle model

8.2.2. Vehicle identification number (VIN)

8.2.3. Vehicle category (N₂, N₃)

8.2.4. Axle configuration

8.2.5. Maximum gross vehicle weight (t)

8.2.6. Vehicle group

8.2.7. Corrected actual mass of the vehicle (kg)

8.2.8. Cryptographic hash of the manufacturer's records file

8.2.9. Vehicle combination's gross combined weight in the verification test (kg)

8.3. Main engine specifications

8.3.1. Engine model

8.3.2. Engine certification number

8.3.3. Engine rated power (kW)

8.3.4. Engine capacity (l)

8.3.5. Engine reference fuel type (diesel/LPG/CNG ...)

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 8.3.6. Hash of the fuel map file/document
- 8.4. Main transmission specifications
 - 8.4.1. Transmission model
 - 8.4.2. Transmission certification number
 - 8.4.3. Main option used for generation of loss maps (Option1/Option2/Option3/Standard values)
 - 8.4.4. Transmission type
 - 8.4.5. Number of gears
 - 8.4.6. Transmission ratio final gear
 - 8.4.7. Retarder type
 - 8.4.8. Power take off (yes/no)
 - 8.4.9. Hash of the efficiency map file/document
- 8.5. Main retarder specifications
 - 8.5.1. Retarder model
 - 8.5.2. Retarder certification number
 - 8.5.3. Certification option used for generation of a loss map (standard values/measurement)
 - 8.5.4. Hash of the retarder efficiency map file/document
- 8.6. Torque converter specification
 - 8.6.1. Torque converter model
 - 8.6.2. Torque converter certification number
 - 8.6.3. Certification option used for generation of a loss map (standard values/measurement)
 - 8.6.4. Hash of the efficiency map file/document
- 8.7. Angle drive specifications
 - 8.7.1. Angle drive model
 - 8.7.2. Axle certification number
 - 8.7.3. Certification option used for generation of a loss map (standard values/measurement)
 - 8.7.4. Angle drive ratio
 - 8.7.5. Hash of the efficiency map file/document
- 8.8. Axle specifications
 - 8.8.1. Axle model
 - 8.8.2. Axle certification number
 - 8.8.3. Certification option used for generation of a loss map (standard values/measurement)

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 8.8.4. Axle type (e.g. standard single driven axle)
- 8.8.5. Axle ratio
- 8.8.6. Hash of the efficiency map file/document
- 8.9. Aerodynamics
 - 8.9.1. Model
 - 8.9.2. Certification option used for generation of CdxA (standard values/measurement)
 - 8.9.3. CdxA Certification number (if applicable)
 - 8.9.4. CdxA value
 - 8.9.5. Hash of the efficiency map file/document
- 8.10. Main tyre specifications
 - 8.10.1. Tyre certification number on all axles
 - 8.10.2. Specific rolling resistance coefficient of all tyres on all axles
- 8.11. Main auxiliary specifications
 - 8.11.1. Engine cooling fan technology
 - 8.11.2. Steering pump technology
 - 8.11.3. Electric system technology
 - 8.11.4. Pneumatic system technology
- 8.12. Test conditions
 - 8.12.1. Actual mass of the vehicle (kg)
 - 8.12.2. Actual mass of the vehicle with payload (kg)
 - 8.12.3. Warm up time (minutes)
 - 8.12.4. Average velocity at warm up (km/h)
 - 8.12.5. Fuel consumption measurement duration (minutes)
 - 8.12.6. Distance based share urban driving (%)
 - 8.12.7. Distance based share rural driving (%)
 - 8.12.8. Distance based share motorway driving (%)
 - 8.12.9. Time share of idling at stand still (%)
 - 8.12.10. Average ambient temperature (°C)
 - 8.12.11. Road condition (dry, wet, snow, ice, others please specify)
 - 8.12.12. Maximum seal level of the route (m)
 - 8.12.13. Maximum duration of continuous idling at stand still (minutes)

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- 8.13. Results of the verification test
 - 8.13.1. Average fan power calculated for the verification test by the simulation tool (kW)
 - 8.13.2. Work over the verification test calculated by the simulation tool (kW)
 - 8.13.3. Work over the verification test measured (kW)
 - 8.13.4. NCV of the fuel used in the verification test (MJ/kg)
 - 8.13.5. Fuel consumption in the verification test measured (g/km)
 - 8.13.6. Fuel consumption in the verification test measured, corrected (g/kWh)
 - 8.13.7. Fuel consumption in the verification test simulated (g/km)
 - 8.13.8. Fuel consumption in the verification test simulated (g/kWh)
 - 8.13.9. Mission profile (long haul/long haul(EMS)/regional/regional(EMS)/urban/municipal/construction)
 - 8.13.10. Verified CO₂ emissions of the vehicle (g/tkm)
 - 8.13.11. Declared CO₂ emissions of the vehicle (g/tkm)
 - 8.13.12. Ratio of fuel consumption measured and simulated in the verification testing procedure in (-)
 - 8.13.13. Passed the verification test (yes/no)
- 8.14. Software and user information
 - 8.14.1. Simulation tool version (X.X.X)
 - 8.14.2. Date and time of the simulation]

ANNEX XI

AMENDMENTS TO DIRECTIVE 2007/46/EC

- (1) In Annex I the following point 3.5.7 is inserted:
 - 3.5.7 CO₂ emissions and fuel consumption certification (for heavy-duty vehicles, as specified in Article 6 of Commission Regulation (EU) 2017/2400)
 - 3.5.7.1 Simulation tool license number:
- (2) In Annex III, in Part I, A (Categories M and N), the following points 3.5.7. and 3.5.7.1. are inserted:
 - 3.5.7 CO₂ emissions and fuel consumption certification (for heavy-duty vehicles, as specified in Article 6 of Commission Regulation (EU) 2017/2400)
 - 3.5.7.1 Simulation tool licence number:
- (3) In Annex IV, Part I, is amended as follows:
 - (a) the row 41A is replaced by the following:

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

| | | | | | | | | | | | | |
|-----|---|---|------------------|---|------------------|------------------|---|--|--|--|--|--|
| 41A | Emission Regulation (Euro VI) No heavy duty vehicle access to information | Regulation (EC) No 595/2009 Regulation (EU) No 582/2011 | X ⁽⁹⁾ | X | X ⁽⁹⁾ | X ⁽⁹⁾ | X | | | | | |
|-----|---|---|------------------|---|------------------|------------------|---|--|--|--|--|--|

(b) the following row 41B is inserted:

| | | | | | | | | | | | | |
|-----|---|---|--|--|--|-------------------|---|--|--|--|--|--|
| 41B | CO ₂ simulation tool licence (heavy duty vehicles) | Regulation (EC) No 595/2009 Regulation (EU) 2017/2400 | | | | X ⁽¹⁶⁾ | X | | | | | |
|-----|---|---|--|--|--|-------------------|---|--|--|--|--|--|

(c) the following explanatory note 16 is added:

⁽¹⁶⁾ For vehicles with a technically permissible maximum laden mass from 7 500 kg

(4) Annex IX is amended as follows:

(a) in Part I, Model B, SIDE 2, VEHICLE CATEGORY N₂, the following point 49 is inserted:

49. Cryptographic hash of the manufacturer's record file ...

(b) in Part I, Model B, SIDE 2, VEHICLE CATEGORY N₃, the following point 49 is inserted:

49. Cryptographic hash of the manufacturer's record file ...

(5) in Annex XV, in point 2, the following row is inserted:

| | | |
|-----|----------------------------------|------------------------------------|
| 46B | Rolling resistance determination | Regulation (EU) 2017/2400, Annex X |
|-----|----------------------------------|------------------------------------|

Status: Point in time view as at 31/01/2020.

Changes to legislation: There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations. (See end of Document for details)

- (1) Commission Regulation (EU) No 1230/2012 of 12 December 2012 implementing Regulation (EC) No 661/2009 of the European Parliament and of the Council with regard to type-approval requirements for masses and dimensions of motor vehicles and their trailers and amending Directive 2007/46/EC of the European Parliament and of the Council (OJ L 353, 21.12.2012, p. 31).
- (2) Regulation (EC) No 661/2009 of the European Parliament and of the Council of 13 July 2009 concerning type-approval requirements for the general safety of motor vehicles, their trailers and systems, components and separate technical units intended therefor (OJ L 200 31.7.2009, p. 1)
- (3) Specify the tolerance; to be within $\pm 3\%$ of the values declared by the manufacturer.
- (4) Delete where not applicable (there are cases where nothing needs to be deleted when more than one entry is applicable)

Status:

Point in time view as at 31/01/2020.

Changes to legislation:

There are outstanding changes not yet made to Commission Regulation (EU) 2017/2400. Any changes that have already been made to the legislation appear in the content and are referenced with annotations.