
**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

## SCHEDULE 1

Regulation 11(2)






## 1001


Vehicular traffic must not proceed beyond the line when required to stop by light signals, by a constable in uniform or by a traffic warden

Item	
1	Regulations: 4, 31, 43, 52
2	Directions: 18, 46, 47, 54A, 56
3	Diagrams: 1001.3, 1055.1, 1055.2, 3000, 3000.1, 3000.2, 3000.7, 3000.8, 3000.9, 3000.10, 3013, 3014, 7011.2
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

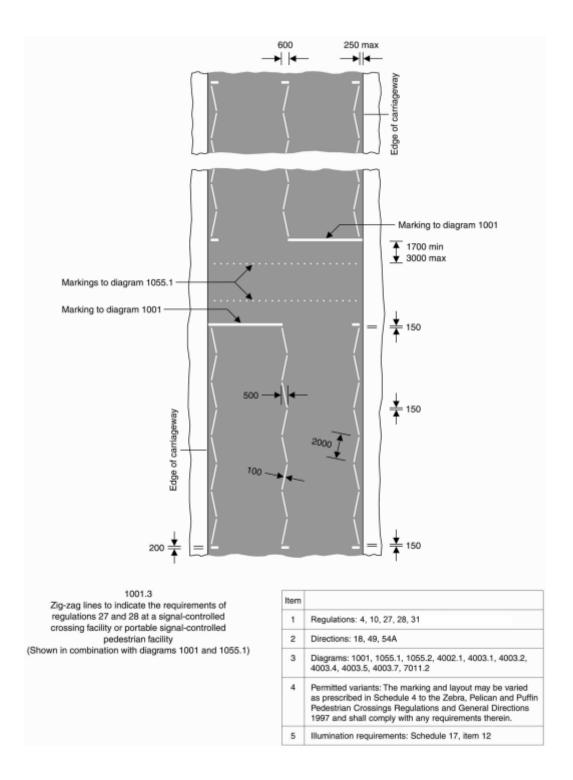

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

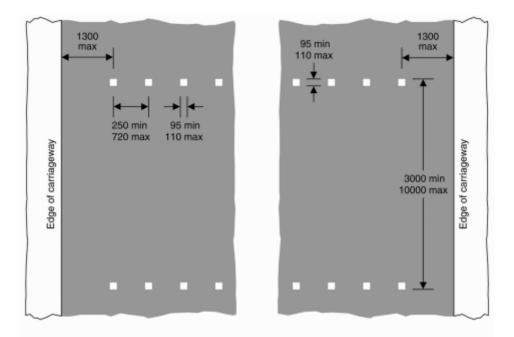



- (a) Place suitable for pedestrians to cross a road at which traffic is subject to control by a constable in uniform or by a traffic warden, being control which is normally in operation during periods amounting in aggregate to not less than 20 hours in any week; or
- (b) the most suitable place for pedestrians to cross a carriageway within 10 metres of traffic light signals of the kind prescribed by regulation 33(1); or
- (c) place suitable for cyclists to cross a road at which cyclists are controlled by traffic light signals of the kind prescribed by regulation 33(2) and other vehicular traffic is controlled by traffic light signals of the kind prescribed by regulation 33(1); or
- (d) signal-controlled pedestrian facility; or
- (e) Toucan crossing; or
- (f) equestrian only crossing; or
- (g) portable signal-controlled pedestrian facility

Item	
1	Regulations: 4, 11, 12, 31
2	Directions: 18, 54A
3	Diagrams: 1001, 1001.3, 3000, 3000.1, 3000.2, 3000.7, 3000.8, 3000.9, 3000.10, 4002.1, 4003.1, 4003.2, 4003.4, 4003.5, 4003.7, 7011.2
4	Permitted variants: The square marks may be varied to circular marks with a diameter between 95 mm and 110 mm. The number of marks shall be varied according to the width of the road. The minimum width of a crossing, other than a Toucan crossing, may be reduced from 3000 mm to 2400 mm
5	Illumination requirements: Schedule 17, item 12