

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.


SCHEDULE 13

Signs only for use in temporary situations

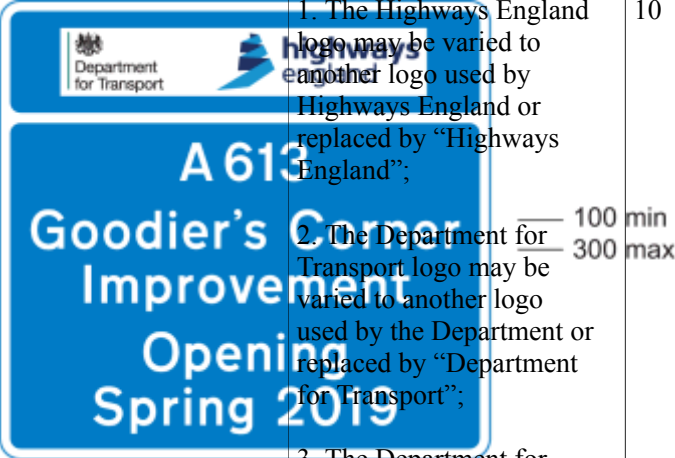
PART 6

Additional Temporary Signs


Sign table — Schedule 13, Part 6

(1) <i>Item</i>	(2) <i>Description</i>	(3) <i>Sign diagram</i>	(4) <i>Permitted variants</i>	(5) <i>Applicable requirements in Part 7</i>	(6) <i>Schedule 13 General Directions</i>
1	Diagram 7006.1 Information on telephone number to be used for enquiries about road works		<p>1. The Highways England logo may be varied to another logo used by Highways England or replaced by “Highways England”;</p> <p>2. The logo may be varied to “Scottish Government”, “Welsh Government” or a logo of the Scottish or Welsh Government;</p> <p>3. The logo may be varied to the name or logo of that part of the Scottish or Welsh Government that is, by virtue of the organisation of the government, responsible for the maintenance or improvement of the road;</p> <p>4. The logo may be varied to the name or logo of another traffic authority;</p> <p>5. The telephone number may be varied</p>	9	4

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) <i>Item</i>	(2) <i>Description</i>	(3) <i>Sign diagram</i>	(4) <i>Permitted variants</i>	(5) <i>Applicable requirements in Part 7</i>	(6) <i>Schedule 13 General Directions</i>
2	<p>Diagram 7007.1</p> <p>Relevant particulars of major construction or improvement scheme being carried out on road ahead</p>		<p>1. The Highways England logo may be varied to another logo used by Highways England or replaced by “Highways England”;</p> <p>2. The Department for Transport logo may be varied to another logo used by the Department or replaced by “Department for Transport”;</p> <p>3. The Department for Transport logo may be varied to the name or logo of another Department of Her Majesty’s Government;</p> <p>3. Either or both logos may be omitted;</p> <p>4. The Highways England or Department for Transport logo (or both) may be replaced by one or two of the following (provided that in total no more than two names or logos are shown)</p> <p>—</p> <p>(a) “Welsh Government” or a logo used by the Welsh Government;</p> <p>(b) “Scottish Government” or a logo used by the Scottish Government;</p> <p>(c) the name or logo of that part of the Scottish or Welsh Government that is, by virtue of the organisation of the government, responsible</p>	10	4

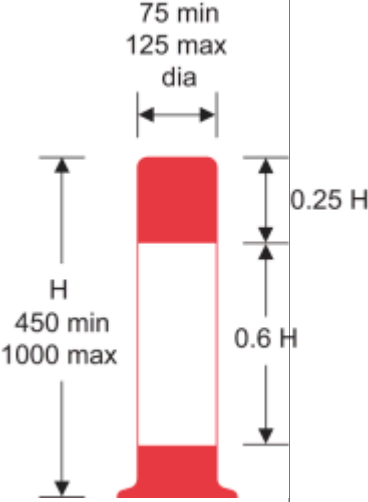
Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
			<p>for the maintenance or improvement of the road;</p> <p>(d) the name or logo of another traffic authority;</p> <p>5. The particulars of the construction or improvement scheme may be varied</p>		
3	<p>Diagram 7008</p> <p>Nature of street works, giving names of undertaker and contractor, emergency telephone number, and apology for inconvenience</p> <p>(Sign for pedestrians)</p>		<p>1. The name of the undertaker (and logo) and contractor, the nature of the works, the completion date and telephone number may be varied;</p> <p>2. Each line of lettering may have a different x-height which must be smaller than the telephone number; 50 max 200 max</p> <p>3. The description of the works, the completion date and the name of the contractor may be omitted;</p> <p>4. The top and bottom panels may be in any colour and style of lettering;</p> <p>5. A logo indicating membership of a national street works good practice scheme may be added to the top or bottom panel;</p> <p>6. The bottom panel may be omitted;</p> <p>7. The top panel may be omitted provided the undertaker's name is shown on the red panel</p>	10	4

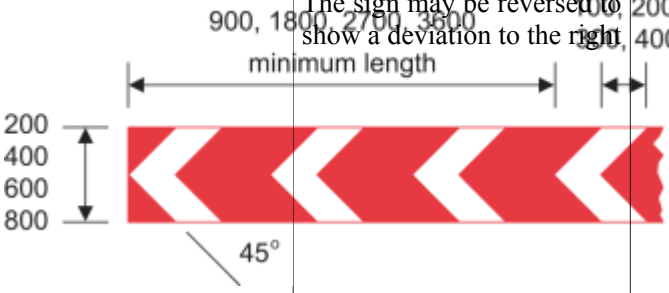
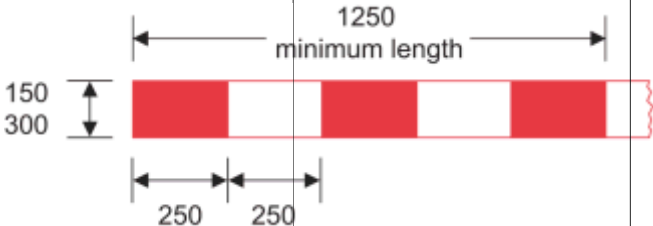
Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
4	<p>Diagram 7101.1</p> <p>Edge of a route for vehicle traffic through or past a temporary obstruction</p> <p>(Traffic cone)</p>		<p>The colour of the base may be varied in accordance with Part 8, paragraph 2</p>	12	4
5	<p>Diagram 7102</p> <p>Edge of a route for vehicular traffic through or past a temporary obstruction on a motorway or dual carriageway road</p> <p>(Flat traffic delineator)</p>		<p>The colour of the base may be varied in accordance with Part 8, paragraph 4</p>	2, 12	4

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
6	<p>Diagram 7103</p> <p>Line of division of traffic flows on one carriageway, or to indicate the edge of a route for vehicular traffic through or past a temporary obstruction, or to mark a boundary between two carriageways of a dual carriageway road which may not be crossed except for fire and rescue authority, Scottish Fire and Rescue Service, ambulance or police purposes (Traffic cylinder)</p>	 <p>75 min 125 max dia</p> <p>H 450 min 1000 max</p> <p>0.25 H</p> <p>0.6 H</p>			

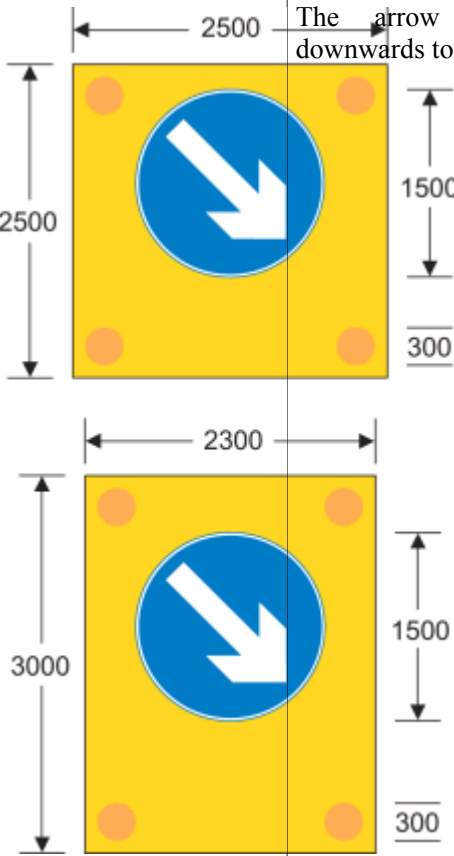

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
7	Diagram 7104 Sharp deviation of route at or near road works or other temporary obstructions		The sign may be reversed to show a deviation to the right.	200, 400	4, 8
8	Diagram 7105 Position of barrier to mark length of road closed to traffic or to guide traffic past an obstruction				4, 8


Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
9	<p>Diagram 7402</p> <p>Lanes closed to traffic ahead by vehicles carrying out mobile road works</p> <p>(Alternative types)</p>		<p>1. The number of arrows and symbols indicating the number of lanes and those which are open or closed to traffic may be varied;</p> <p>2. "500 yds" may be varied to an alternative distance to the nearest 50 yards, to "Ahead" or, on the lower image, to "On slip road" on two lines;</p> <p>3. The distance plate may be omitted</p>	9	4, 6(3)

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
10	<p>Diagram 7403</p> <p>Other traffic to keep to the right of vehicles carrying out mobile road works</p> <p>(Alternative types)</p>		<p>The arrow may point downwards to the left</p>	1, 9	4, 6(3)
11	<p>Diagram 610</p> <p>Sign—</p> <p>(a) attached to the front or back of a road maintenance vehicle to indicate the side on which traffic should pass; or</p> <p>(b) placed in relation</p>		<ol style="list-style-type: none"> 1. Arrow may point downwards to the left; 2. When attached to a vehicle, the diameter of the sign may be reduced to 1200 or 900 mm where it is not practicable to mount the 1500 millimetre diameter sign on the vehicle; 3. When placed in relation to an emergency or breakdown vehicle, the diameter may be reduced to 1200 or 900 mm 	1, 11	6(1), 6(2)

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
	to an emergency or breakdown vehicle which is temporarily obstructing the road to warn other traffic of the obstruction and to indicate the way past the vehicle				
12	<p>Diagram 7404</p> <p>Nature of work being done by vehicle working on the highway</p> <p>(Sign attached to a road maintenance vehicle)</p>		<p>1. "HIGHWAY" may be varied to "MOTORWAY" or "ROAD";</p> <p>2. The legend may be on one line</p>	9, 10	4, 6(3)


Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
13	Diagram 7202.1 Temporary lane availability (Alternative types)	<p>200, 250, 300, 350</p>	<p>1. The number of arrows and symbols indicating the number of lanes and those which are open or closed to traffic may be varied;</p> <p>2. Where the sign has a bottom panel, the legend may be varied to another distance or to “On slip road”, provided the legend appears on no more than three lines</p>	9	4
14	Diagram 7243 Temporary road layout with lane restrictions	<p>160, 200, 240 arrow</p>	<p>1. In the top panel the legend may be—</p> <p>(a) varied to “REJOIN MAIN CARRIAGEWAY” or “NARROW LANES”;</p> <p>(b) on one line;</p> <p>2. The top panel may be omitted;</p> <p>3. In the middle panel—</p> <p>(a) the arrows and symbols may be varied to indicate the layout of the traffic lanes provided that the shape of an arrow head is not varied;</p> <p>(b) an individual arrow may include more than one arrow head;</p>	9	4, 5

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
			<p>(c) the numerals on the width limit symbol may be varied;</p> <p>(d) the width limit symbol may be omitted or varied to a symbol shown in column 3 of the sign table in Part 20 of Schedule 12 at items 24, 25, 28, 30, 33, and 35;</p> <p>(e) the size of a symbol referred to in paragraph (d) may be varied from that shown for the symbol in Part 20 of Schedule 12;</p> <p>(f) route numbers may be added with the x-height being 100, 125 or 150 mm;</p> <p>(g) the route numbers referred to in paragraph (f) may be followed by “only” at the same x-height;</p> <p>(h) a motorway junction number in white characters on a black patch may be added in a manner similar to the patch shown in the diagram at item 15, the x-height being 80, 100 or 120 mm;</p> <p>(i) a horizontal bar may be added in the manner shown in the diagram at item 15 where two or more lanes are associated with the same route number;</p> <p>(j) a white downward pointing arrow, as shown in the upper diagram at item 13, may be added to</p>		

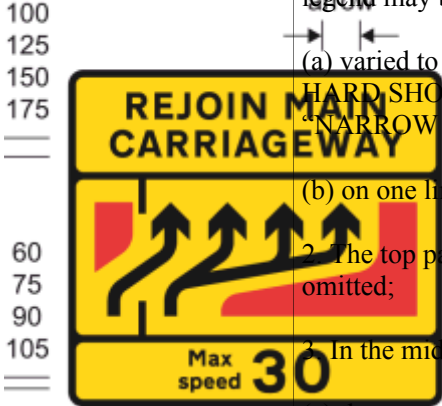
Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
			<p>indicate a contraflow traffic lane</p> <p>4. In the bottom panel—</p> <p>(a) the numerals indicating the maximum speed advised may be varied;</p> <p>(b) the legend may be varied to a distance with an x-height of 100 mm, 125 mm or 150 mm;</p> <p>(c) the distance referred to in paragraph (b) may be preceded by “For”;</p> <p>5. The bottom panel may be omitted</p>		
15	<p>Diagram 7244</p> <p>Temporary road layout, with an indication of destinations and route numbers, where the sign is placed on a motorway</p>		<p>1. A panel with the legend “USE HARD SHOULDER”, “REJOIN MAIN CARRIAGEWAY”, “NARROW LANES”, “EVENT TRAFFIC” or other appropriate legend, may be added above the top panel in a manner similar to the top panel shown in the diagram at item 14 with an x-height of not less than 100 mm, nor more than 150 mm;</p> <p>2. In the top panel—</p> <p>(a) the arrows may be varied to indicate the layout of the traffic lanes provided the shape of an arrow head is not varied;</p> <p>(b) a white downward pointing arrow, as shown in the upper diagram at</p>	9	4, 5


Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
			<p>item 13, may be added to indicate a contraflow traffic lane;</p> <p>(c) the symbol indicating a closed lane, as shown in the diagrams at item 13, may be added;</p> <p>(d) where the sign is placed other than on a motorway, any route number must have characters of the form shown in Part 2 of Schedule 17 with an x-height of not less than 100 mm, nor more than 150 mm;</p> <p>(e) a symbol shown in a diagram in Part 11 or 20 of Schedule 12 may be added and the size of the symbol may be varied from that shown;</p> <p>(f) a destination or route number may be varied or omitted, and additional destinations and route numbers added;</p> <p>(g) the junction number may be varied or omitted;</p> <p>3. In the bottom panel the distance may be varied;</p> <p>4. The bottom panel may be omitted</p>		

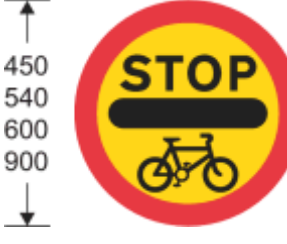


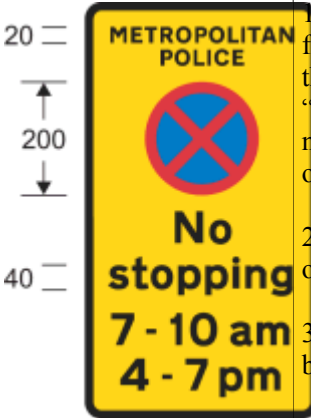
Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.





(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
16	Diagram 7245 Temporary road layout		<p>In the top panel the legend may be-</p> <p>(a) varied to “USE HARD SHOULDER” or “NARROW LANES”;</p> <p>(b) on one line;</p> <p>2 The top panel may be omitted;</p> <p>2 In the middle panel-</p> <p>(a) the arrows and symbols may be varied to indicate the layout of the traffic lanes provided the shape of an arrow head is not be varied;</p> <p>(b) an individual arrow may include more than one arrow head;</p> <p>(c) black symbols representing the division of traffic lanes may be added in a manner similar to that shown at item 14 of the sign table in Part 2 of Schedule 11 or at item 1 of the sign table in Part 28 of Schedule 12;</p> <p>(d) a white downward pointing arrow as shown in the upper diagram at item 13 may be added to indicate a contraflow traffic lane;</p> <p>(e) destinations and route numbers may be added with an x-height of 100, 125, 150 or 175 mm;</p>	9	4, 5

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

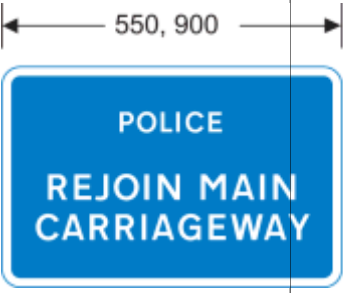
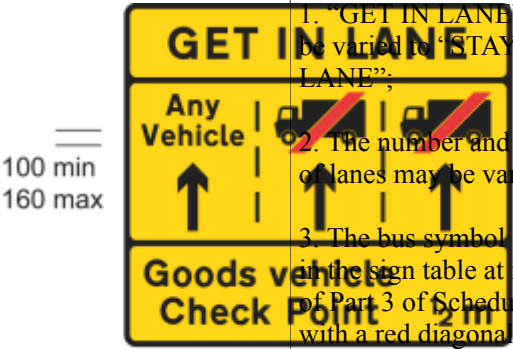
(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
			<p>(f) a junction number panel may be added in a manner similar to that shown in the diagram at item 15, the x-height being 80, 100, 120 or 140 mm;</p> <p>(g) symbols provided for in Parts 11, 12, 14, 15, 17 and 18 of Schedule 12 may be added;</p> <p>4. In the bottom panel—</p> <p>(a) the numerals indicating the maximum speed advised may be varied;</p> <p>(b) the legend may be varied to a distance with an x-height of 100, 125, 150 or 175 mm;</p> <p>(c) the distance may be preceded by “For”;</p> <p>5. The bottom panel may be omitted</p>		
17	<p>Diagram 633</p> <p>Vehicular traffic must not proceed beyond the sign where displayed by a constable in uniform or by a traffic warden</p>		<p>A red or transparent protective strip, with a visible width not exceeding 6 mm, may be applied to the perimeter of the sign</p>		10

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.



(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
18	Diagram 633.1 Vehicular traffic must not proceed beyond the sign		A red or transparent protective strip, with a visible width not exceeding 6 mm, may be applied to the perimeter of the sign	1, 9	9
19	Diagram 636 Temporary prohibition of waiting except for loading and unloading		<p>1. The name of the police force or traffic authority, or the word "Police" or "POLICE" may be added above or below the roundel;</p> <p>2. An arrow pointing to the left or to the right may be added</p>	10	5, 10
20	Diagram 636.1 Temporary prohibition of loading and unloading		The legend may be on one line	10	5
21	Diagram 636.2 Temporary prohibition on stopping during the periods indicated		<p>1. The name of the police force may be varied to the appropriate force, "POLICE" or "Police", the name of a traffic authority, or omitted;</p> <p>2. "No stopping" may be on one line;</p> <p>3. Time periods shown may be varied or omitted</p>	10	5, 10

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
22	<p>Diagram 640.1</p> <p>Waiting, loading and unloading prohibited at a parking place where parking is temporarily suspended</p>		<p>1. “during meter control” may be added;</p> <p>2. “No loading” may be omitted;</p> <p>3. The sign may have more than one side and may be placed on a parking meter or ticket machine cover;</p> <p>4. The symbol and legend may be repeated</p>	10	5
23	<p>Diagram 829.1</p> <p>Potential danger temporarily ahead and consequent need to proceed with caution</p>				7, 10
24	<p>Diagram 829.2</p> <p>Accident ahead and consequent need to proceed with caution</p>				7, 10
25	<p>Diagram 829.3</p> <p>Traffic should use the hard shoulder in an emergency</p>				7, 10

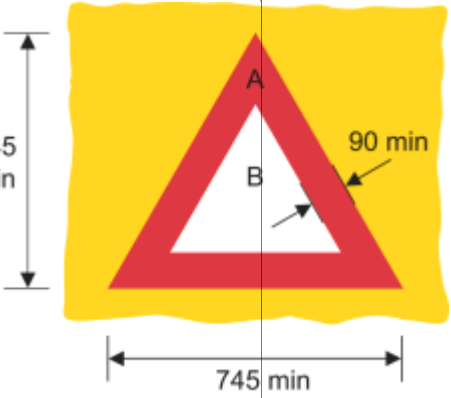
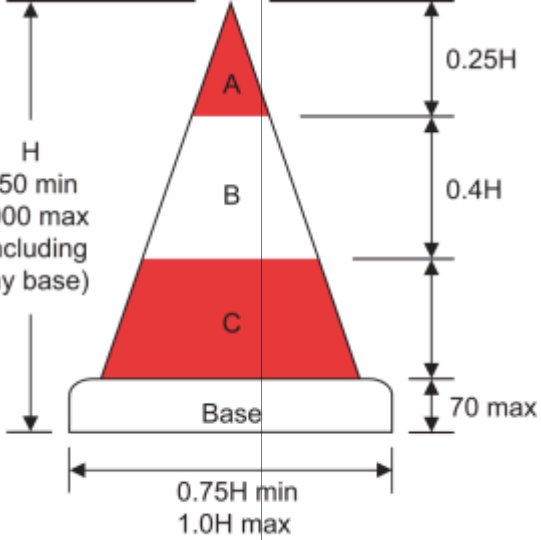
Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
26	Diagram 829.4 End of temporary permission for traffic to use the hard shoulder				7, 10
27	Diagram 832.7 Goods vehicles or public service vehicles (PSV) should get into the left hand lane of a carriageway on the approach to a goods vehicle or PSV check point ahead		<p>1. "GET IN LANE" may be varied to "STAY IN LANE";</p> <p>2. The number and position of lanes may be varied;</p> <p>3. The bus symbol shown in the sign table at item 4 of Part 3 of Schedule 5, with a red diagonal bar through it, may be added below, or substituted for, the lorry symbol (ignoring the requirements as to size at item 4);</p> <p>4. The legend "Any vehicle" may be varied to "Other vehicles" with the lorry and bus symbols shown without the red bar;</p> <p>5. "Goods vehicle" may be varied to "Goods vehicle and PSV" or "PSV";</p> <p>6. The distance may be varied to "1 m", "2/3 m" or "1/3 m"</p>		

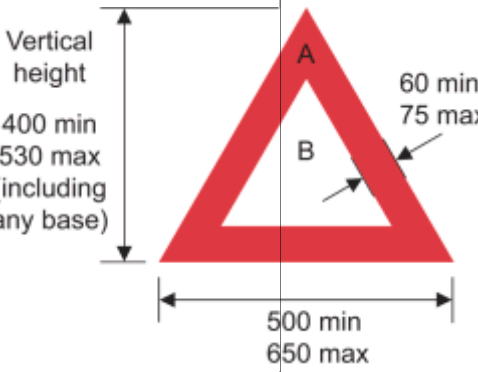
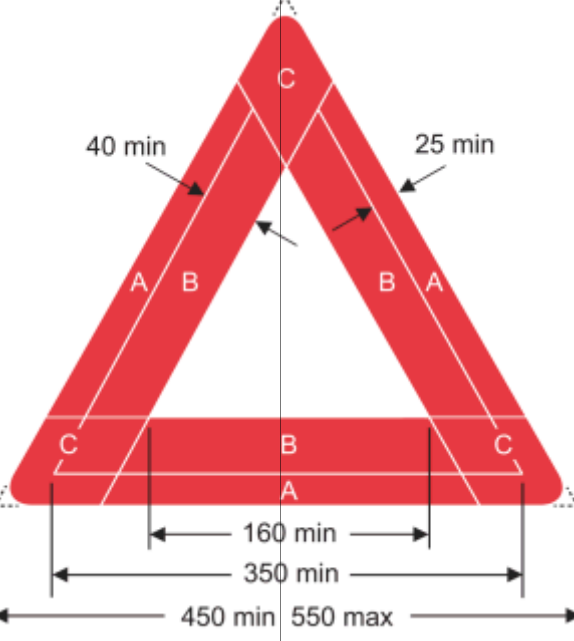
Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
28	Diagrams 2701 and 2701.1 Direction and junction ahead to a new housing development	<p>2701 </p> <p>2701.1 </p>	<p>1. The sign shown by diagram 2701 may point to the left with the symbol placed to the right of the legend;</p> <p>2. The direction in which the arrow points in diagram 2701.1 may be varied;</p> <p>3. When the arrow in diagram 2701.1 points to the left it must be placed on the left hand side of the sign with the symbol placed to the right of the legend;</p> <p>4. When the arrow in diagram 2701.1 points ahead it may be placed on the left or right hand side of the sign with the symbol placed at the opposite end of the sign;</p> <p>5. The arrow in diagram 2701.1 may be omitted and the U-turn arrow shown in column 3 of the sign table in Part 5 of Schedule 12 at item 2, placed to the right of the legend;</p> <p>6. The name of the housing development may be varied or omitted;</p> <p>7. A distance to the destination may be shown (and the sign treated for the purposes of Part 3 of Schedule 18 as if it were in Schedule 12);</p> <p>8. The lorry symbol shown at item 5 of the sign table</p>	10	11

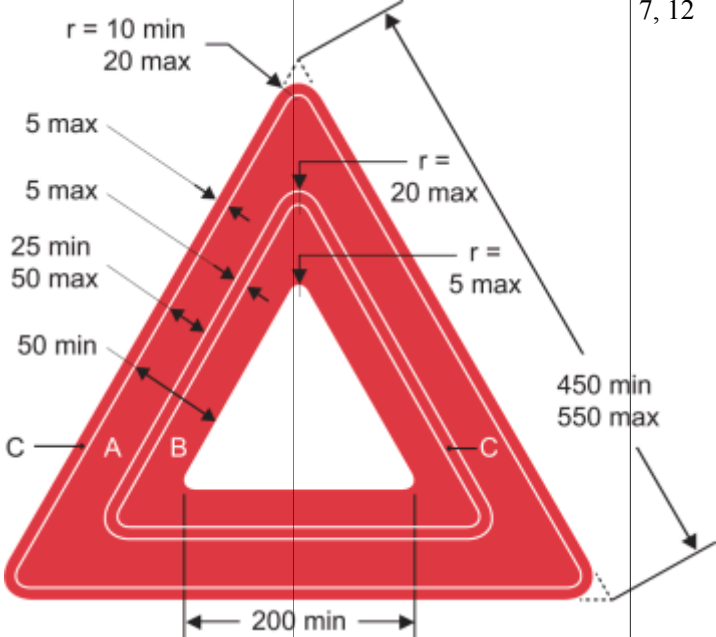



Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
			in Part 1 of Schedule 5 may be added (ignoring the requirements as to size at item 5) and reversed where appropriate		
29	Temporary obstruction in road caused by stationary vehicle (road vehicle sign)			3, 12	6(5)
30	Warning of a temporary hazard (traffic pyramid (type 1))			4, 12	



Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
31	Warning of a temporary hazard (traffic pyramid (type 2))			5, 12	
32	Warning of a temporary hazard (traffic triangle (type 1))			6, 12	




Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
33	Warning of a temporary hazard (traffic triangle (type 2))			7, 12	
34	Diagram 7025 Vehicles to be escorted in through road works ahead				4
35	Diagram 7026 Explanation of reason for escorting vehicles in convoys through road works				4
36	Diagram 7029 Vehicular traffic must not overtake the vehicle used to escort other		<p>1. "NO OVERTAKING" may be omitted;</p> <p>2. "CONVOY VEHICLE" may be on one line</p> <p>50 62.5</p>	1 (except if varied in accordance with entry 1 in column 4)	4, 6(4)



Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable Schedule requirements in Part 7	(6) Schedule 13 General Directions
	vehicles through road works				
37	Diagram 7014 Permanent change in road layout ahead		1. "NEW ROUNDABOUT" may be varied to— — 50 min (a) " CHANGED PRIORITIES"; (b) "GAP CLOSED"; (c) "NEW ONE WAY SYSTEM"; (d) "NEW ROAD LAYOUT"; (e) "NEW TRAFFIC ISLANDS"; (f) "NEW TRAFFIC SIGNALS"; (g) "NEW ZEBRA CROSSING"; (h) "SIGNAL PRIORITIES CHANGED"; or (i) "SIGNAL TIMING CHANGED"; 2. A distance in yards to the nearest 10 yards may be substituted for, or added before, the word "AHEAD", on a separate line where necessary, and must be expressed as "yards" or "yds"	8	12
38	Diagram 7032 Commencement point of a newly imposed 30		— 50 min — 75 max	8	13



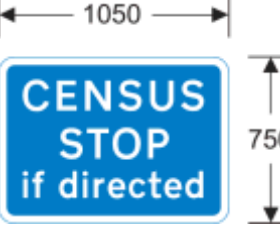
Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
	mph speed limit which is contiguous to an existing 30 mph speed limit				
39	Diagram 7014.1 Temporary or permanent reduction in bridge headroom ahead		The numerals may be varied. — 50 min 200 max	8	14
40	Diagram 7291 Information on breakdown recovery services during road works		“Await rescue” may be varied to “End”. — 150 min 250 max	9	4
41	Diagram 7294 Temporary maximum speed in mph advised	50 62.5 — 75 100 200	 The numerals may be varied to the appropriate advised maximum speed	9	4




Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
42	Diagram 7003.1 Starting date and duration of road works		<ol style="list-style-type: none"> 1. The Highways England logo may be varied to another logo used by Highways England or replaced by "Highways England"; 2. The Highways England logo may be varied to the name or logo of another traffic authority; 3. The date and duration of the work may be varied; 4. "until" and a date may be substituted for " for 3 weeks"; 5. The top or bottom panel, or both, may be omitted; 6. The triangular road works symbol may be omitted 	100 min 250 max	4
43	Diagram 7005 Information for drivers in respect of road works		<ol style="list-style-type: none"> 1. The date may be varied; 2. "until" and the date may be omitted; 3. "Delays possible until" and the date may be varied to a short description of the work in progress or explanation of why work is suspended; 4. The distance may be varied, may be preceded by "For" and may be on two lines; 5. The triangular road works symbol and distance plate may be omitted 	100 min 250 max	4

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.




(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
44	Diagram 7006 End of road works and any associated temporary statutory restrictions		<p>1. The Highways England logo may be varied to another logo used by Highways England or replaced by "Highways England";</p> <p>2. The Highways England logo may be varied to the name or logo of another traffic authority;</p> <p>3. The Highways England panel and the horizontal line below "delay" may be omitted</p>	<p>100 min 250 max</p>	4
45	Diagram 2708 Junction ahead leading to route for emergency vehicles to a temporary incident control point		<p>1. "EMERGENCY VEHICLES" may be varied to "INCIDENT CONTROL";</p> <p>2. The direction in which the arrow or arrows point may be varied</p>		
46	Diagram 830.1 Signs indicating that a traffic survey is being undertaken		<p>1. "CENSUS" may be varied to "CYCLISTS", "WEIGHT CHECK" or "VEHICLE CHECK";</p> <p>2. The entire legend may be varied to "STOP AT CENSUS POINT", "SLOW CENSUS POINT" or "CENSUS POINT";</p> <p>3. For the purposes of entry 2, "CENSUS POINT" may be varied to "WEIGHT CHECK" or "CHECK POINT"</p>		15

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
47	Diagram 830.2 Goods vehicles may be directed to stop ahead by a constable in uniform for the purposes of sections 67,68, or 78 of the Road Traffic Act 1988(1)		75 min 250 max		
48	Diagram 830.3 Vehicles should stay in lane for the purposes of a traffic survey, or a weight or vehicle check ahead		“STAY” may be varied to “GET”		15
49	Diagram 831.2 Checks being made in relation to vehicle excise licences (or emissions) ahead		75 min 200 max “EXCISE LICENCE” may be varied to “EMISSIONS”		

(1) 1988 c. 52. Sections 67 and 68 were amended by the Road Traffic Act 1991 (c. 40), sections 10 and 11 respectively.

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Sign diagram	(4) Permitted variants	(5) Applicable requirements in Part 7	(6) Schedule 13 General Directions
50	Diagram 832.1B Check point ahead		<p>1. “DVSA” may be varied to “GOODS VEHICLE” or the name of a successor organisation to the Driver and Vehicle Standards Agency (in respect of its function of carrying out examinations in relation to goods vehicles or public service vehicles at check points) or an acronym for that successor organisation;</p> <p>2. “CHECK POINT AHEAD” may be varied to “VEHICLE CONDITION INSPECTION”</p>		
51	Diagram 832.4 Instructions in relation to goods vehicles for a check point ahead		<p>1. The legend may be varied to “Enter Check Point”, “Keep to left lane” or “Leave m’way if directed”;</p> <p>2. The bus symbol shown at item 4 of the sign table in Part 3 of Schedule 5 may be added below or substituted for the symbol (ignoring the requirements as to size at item 4)</p>		
52	Diagram 7020 Variable message sign ahead not in use or being tested		<p>1. “SIGN” may be varied to “SIGNAL”;</p> <p>2. “NOT IN USE” may be varied to “UNDER TEST”;</p> <p>3. The legend may be on three lines</p>		